

# Octal Buffer/Line Driver with 3-STATE Outputs

### **74VHC240**

#### **General Description**

The VHC240 is an advanced high speed CMOS octal bus buffer fabricated with silicon gate CMOS technology. It achieves high speed operation similar to equivalent Bipolar Schottky TTL while maintaining the CMOS low power dissipation. The VHC240 is an inverting 3–STATE buffer having two active–LOW output enables. This device is designed to drive buslines or buffer memory address registers.

An input protection circuit ensures that 0 V to 5.5 V can be applied to the input pins without regard to the supply voltage. This device can be used to interface 5 V to 3 V systems and two supply systems such as battery backup. This circuit prevents device destruction due to mismatched supply and input voltages.

#### **Features**

- High Speed:  $t_{PD} = 3.6 \text{ ns}$  (Typ) at  $T_A = 25^{\circ}\text{C}$
- Low Power Dissipation:  $I_{CC} = 4 \mu A \text{ (Max)} @ T_A = 25^{\circ}C$
- High Noise Immunity:  $V_{NIH} = V_{NIL} = 28\% V_{CC}$  (Min)
- Power Down Protection is Provided on All Inputs
- Low Noise: V<sub>OLP</sub> = 0.9 V (Max)
- Pin and Function Compatible with 74HC240
- This is a Pb-Free Device



CASE 948AQ

MARKING DIAGRAM




XXXXXX = Specific Device Code A = Assembly Location

L = Wafer Lot Y = Year W = Work Week ■ Pb-Free Package

(Note: Microdot may be in either location)

#### **CONNECTION DIAGRAM**



#### **PIN DESCRIPTIONS**

Pin Names	Description
$\overline{OE}_1$ , $\overline{OE}_2$	3-STATE Output Enable Inputs
I <sub>0</sub> –I <sub>7</sub>	Inputs
$\overline{O}_0$ – $\overline{O}_7$	Outputs 3–STATE Outputs

#### **ORDERING INFORMATION**

See detailed ordering and shipping information in the package dimensions section on page 4 of this data sheet.

#### **Logic Symbol**




Figure 1. Logic Symbol

#### **TRUTH TABLES**

Inp	uts	Outputs
OE <sub>1</sub>	I <sub>n</sub>	(Pins 12, 14, 16, 18)
L	Н	Н
L	L	L
Н	Х	Z

Inp	uts	Outputs
OE <sub>1</sub>	I <sub>n</sub>	(Pins 3, 5, 7, 9)
L	Н	Н
L	L	L
Н	Х	Z

H = HIGH Voltage Level L = LOW Voltage Level

X = Immaterial
Z = High Impedance

#### **ABSOLUTE MAXIMUM RATINGS**

Symbol	P	Value	Unit	
V <sub>CC</sub>	DC Supply Voltage		-0.5 to +6.5	V
V <sub>IN</sub>	DC Input Voltage		-0.5 to +6.5	V
V <sub>OUT</sub>	DC Output Voltage		-0.5 to V <sub>CC</sub> + 0.5	V
I <sub>IN</sub>	DC Input Current, per Pin	DC Input Current, per Pin		
I <sub>OUT</sub>	DC Output Current, per Pin	±25	mA	
I <sub>CC</sub>	DC Supply Current, V <sub>CC</sub> and GND Pi	±75	mA	
I <sub>IK</sub>	Input Clamp Current	-20	mA	
I <sub>OK</sub>	Output Clamp Current	±20	mA	
T <sub>STG</sub>	Storage Temperature Range	-65 to +150	°C	
$T_L$	Lead Temperature, 1 mm from Case f	260	°C	
$T_J$	Junction Temperature under Bias		+150	°C
$\theta_{JA}$	Thermal Resistance (Note 2)		150	°C/W
P <sub>D</sub>	Power Dissipation in Still Air at 25°C		833	mW
MSL	Moisture Sensitivity		Level 1	
F <sub>R</sub>	Flammability Rating	Oxygen Index: 28 to 34	UL 94 V-0 @ 0.240 in	
V <sub>ESD</sub>	ESD Withstand Voltage (Note 3)	Human Body Model	2000	V
		Charged Device Model	N/A	

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Applicable to devices with outputs that may be tri–stated.

- Measured with minimum pad spacing on an FR4 board, using 76 mm-by-114 mm, 2-ounce copper trace no air flow per JESD51-7.
   HBM tested to EIA / JESD22-A114-A. CDM tested to JESD22-C101-A. JEDEC recommends that ESD qualification to EIA/JESD22-A115A (Machine Model) be discontinued.

#### 74VHC240

#### **RECOMMENDED OPERATING CONDITIONS**

Symbol	Parai	Parameter				
V <sub>CC</sub>	DC Supply Voltage			5.5	V	
V <sub>IN</sub>	DC Input Voltage (Note 4)			5.5	V	
V <sub>OUT</sub>	DC Output Voltage (Note 4)	0	V <sub>CC</sub>	V		
T <sub>A</sub>	Operating Temperature			+85	°C	
t <sub>r</sub> , t <sub>f</sub>	Input Rise or Fall Rate	V <sub>CC</sub> = 3.0 V to 3.6 V	0	100	ns/V	
		V <sub>CC</sub> = 4.5 V to 5.5 V	0	20		

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

4. Unused inputs must always be tied to an appropriate logic voltage level (e.g., either GND or V<sub>CC</sub>). Unused outputs must be left open.

#### DC ELECTRICAL CHARACTERISTICS

						T <sub>A</sub> = 25°C		$T_A = -40^{\circ}$	C to +85°C	
Symbol	Parameter	Con	ditions	V <sub>CC</sub> (V)	Min	Тур	Max	Min	Max	Unit
V <sub>IH</sub>	HIGH Level Input			2.0	1.50	-	_	1.50	-	V
	Voltage			3.0-5.5	0.7 x V <sub>CC</sub>	-	-	0.7 x V <sub>CC</sub>	-	
$V_{IL}$	LOW Level Input			2.0	-	-	0.50	-	0.50	V
	Voltage			3.0-5.5	_	-	0.3 x V <sub>CC</sub>	-	0.3 x V <sub>CC</sub>	
V <sub>OH</sub>	HIGH Level	$V_{IN} = V_{IH}$	$I_{OH} = -50 \mu A$	2.0	1.9	2.0	-	1.9	-	V
	Output Voltage	or V <sub>IL</sub>		3.0	2.9	3.0	-	2.9	-	
				4.5	4.4	4.5	-	4.4	-	
			$I_{OH} = -4 \text{ mA}$	3.0	2.58	-	-	2.48	-	
			$I_{OH} = -8 \text{ mA}$	4.5	3.94	-	-	3.80	-	
V <sub>OL</sub>	LOW Level	$V_{IN} = V_{IH}$	I <sub>OL</sub> = 50 μA	2.0	_	0.0	0.1	_	0.1	V
	Output Voltage	or V <sub>IL</sub>		3.0	_	0.0	0.1	-	0.1	
				4.5	-	0.0	0.1	-	0.1	
			$I_{OL} = 4 \text{ mA}$	3.0	-	-	0.36	-	0.44	
			$I_{OL} = 8 \text{ mA}$	4.5	_	-	0.36	-	0.44	
l <sub>OZ</sub>	3-STATE Output Off-State Current	$V_{IN} = V_{IH} \text{ or } V_{IL};$ $V_{OUT} = V_{CC} \text{ or GND}$		5.5	-	-	±0.25	-	±2.5	μΑ
I <sub>IN</sub>	Input Leakage Current	V <sub>IN</sub> = 5.5 V or GND		0–5.5	-	-	±0.1	-	±1.0	μΑ
Icc	Quiescent Supply Current	$V_{IN} = V_{CC}$	or GND	5.5	_	_	4.0	_	40.0	μΑ

#### **NOISE CHARACTERISTICS**

				T <sub>A</sub> = 25°C		
Symbol	Parameter	Conditions	V <sub>CC</sub> (V)	Тур	Limits	Unit
V <sub>OLP</sub> (Note 5)	Quiet Output Maximum Dynamic V <sub>OL</sub>	C <sub>L</sub> = 50 pF	5.0	0.6	0.9	V
V <sub>OLV</sub> (Note 5)	Quiet Output Minimum Dynamic V <sub>OL</sub>	C <sub>L</sub> = 50 pF	5.0	-0.6	-0.9	V
V <sub>IHD</sub> (Note 5)	Minimum HIGH Level Dynamic Input Voltage	C <sub>L</sub> = 50 pF	5.0	-	3.5	V
V <sub>ILD</sub> (Note 5)	Maximum LOW Level Dynamic Input Voltage	C <sub>L</sub> = 50 pF	5.0	-	1.5	٧

<sup>5.</sup> Parameter guaranteed by design.

#### 74VHC240

#### **AC ELECTRICAL CHARACTERISTICS**

						T <sub>A</sub> = 25°C		$T_A = -40^{\circ}C$	C to +85°C	
Symbol	Parameter	Cond	ditions	V <sub>CC</sub> (V)	Min	Тур	Max	Min	Max	Unit
t <sub>PLH</sub> ,	Propagation		$C_{L} = 15 \text{ pF}$	3.3 ±0.3	-	5.3	7.5	1.0	9.0	ns
t <sub>PHL</sub>	Delay Time		$C_L = 50 pF$	]	-	7.8	11.0	1.0	12.5	
			C <sub>L</sub> = 15 pF	5.0 ±0.5	-	3.6	5.5	1.0	6.5	
			$C_L = 50 \text{ pF}$	]	-	5.1	7.5	1.0	8.5	
t <sub>PZL</sub> ,	3-STATE Output	$R_L = 1 \text{ k}\Omega$	C <sub>L</sub> = 15 pF	3.3 ±0.3	-	6.6	10.6	1.0	12.5	ns
t <sub>PZH</sub>	Enable Time		$C_L = 50 \text{ pF}$	]	-	9.1	14.1	1.0	16.0	
			C <sub>L</sub> = 15 pF	5.0 ±0.5	-	4.7	7.3	1.0	8.5	
			$C_L = 50 \text{ pF}$	]	-	6.2	9.3	1.0	10.5	
t <sub>PLZ</sub> ,	3-STATE Output	$R_L = 1 \text{ k}\Omega$	$C_L = 50 pF$	3.3 ±0.3	-	10.3	14.0	1.0	16.0	ns
t <sub>PHZ</sub>	Disable Time		C <sub>L</sub> = 50 pF	5.0 ±0.5	6.7	-	9.2	1.0	10.5	
t <sub>OSLH</sub> ,	Output to Output	(Note 6)	$C_{L} = 50 \text{ pF}$	3.3 ±0.3	-	-	1.5	-	1.5	ns
toshl	Skew		$C_{L} = 50 \text{ pF}$	5.0 ±0.5	-	-	1.0	-	1.0	
C <sub>IN</sub>	Input Capacitance	V <sub>CC</sub> = Ope	n		-	4	10	-	10	pF
C <sub>OUT</sub>	Output Capacitance	V <sub>CC</sub> = 5.0 V			-	6	_	-	-	pF
C <sub>PD</sub>	Power Dissipation Capacitance	(Note 7)			-	17	-	_	-	pF

#### **ORDERING INFORMATION**

Device	Marking	Package	Shipping <sup>†</sup>
74VHC240MTCX	VHC 240	TSSOP20 (Pb-Free)	2500 Units / Tape & Reel


<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

Parameter guaranteed by design. t<sub>OSLH</sub> - |t<sub>PLHmax</sub> - t<sub>PLHmin</sub>|; t<sub>OSHL</sub> - |t<sub>PHLmax</sub> - t<sub>PHLmin</sub>|
 C<sub>PD</sub> is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load. Average operating current can be obtained by the equation: I<sub>CC</sub> (opr.) = C<sub>PD</sub> · V<sub>CC</sub> · f<sub>IN</sub> + I<sub>CC</sub>/8 (per bit).




#### TSSOP20, 4.4x6.5 CASE 948AQ ISSUE A

**DATE 19 MAR 2009** 

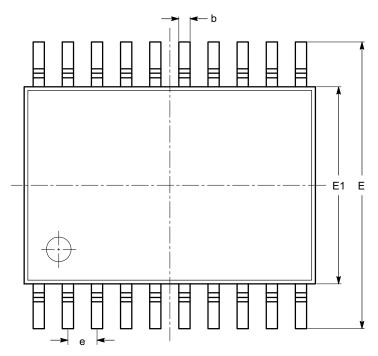

SYMBOL	MIN	NOM	MAX
А			1.20
A1	0.05		0.15
A2	0.80		1.05
b	0.19		0.30
С	0.09		0.20
D	6.40	6.50	6.60
Е	6.30	6.40	6.50
E1	4.30	4.40	4.50
е		0.65 BSC	
L	0.45	0.60	0.75
L1		1.00 REF	
θ	0°		8°

#### **TOP VIEW**

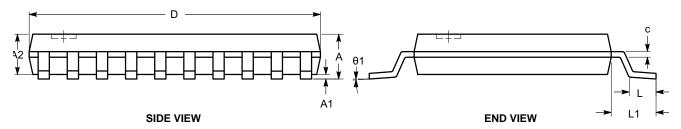

#### Notes:

- (1) All dimensions are in millimeters. Angles in degrees.
- (2) Complies with JEDEC MO-153.

DOCUMENT NUMBER:	98AON34453E	Electronic versions are uncontrolled except when accessed directly from the Document Repositor Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.				
DESCRIPTION:	TSSOP20, 4.4X6.5		PAGE 1 OF 1			

onsemi and ONSEMi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, Onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase

#### ADDITIONAL INFORMATION

**TECHNICAL PUBLICATIONS:** 

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$ 

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

onsemi:

74VHC240SJX 74VHC240MTC 74VHC240MTCX 74VHC240SJ 74VHC240M 74VHC240MX