

Switching Diode, High Voltage, High Temperature

BASH19L Series

Features


- 175°C T_{J(MAX)} Rated for High Temperature, Mission Critical Applications
- NSV Prefixes for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Continuous Reverse Voltage BASH19 BASH20 BASH21	V _R	120 200 250	Vdc
Repetitive Peak Reverse Voltage BASH19 BASH20 BASH21	V_{RRM}	120 200 250	Vdc
Continuous Forward Current	IF	200	mAdc
Peak Forward Surge Current (1/2 Cycle, Sine Wave, 60 Hz)	I _{FSM}	2	Α
Repetitive Peak Forward Current (Pulse Train: T _{ON} = 1 s, T _{OFF} = 0.5 s)	I _{FRM}	0.6	Α
Junction and Storage Temperature Range	T _J , T _{stg}	-55 to +175	°C
Electrostatic Discharge	ESD	HM < 500	V
		MM < 400	V


Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

HIGH VOLTAGE SWITCHING DIODE





MARKING DIAGRAM



AD7 = BASH19L
AC7 = BASH20L
AA7 = BASH21L
M = Date Code
• Pb-Free Package

(Note: Microdot may be in either location)

ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 3 of this data sheet.

BASH19L Series

THERMAL CHARACTERISTICS


Characteristic	Symbol	Max	Unit
Total Device Dissipation FR-5 Board (Note 1)	P _D	300	mW
T _A = 25°C Derate above 25°C		1.8	mW/°C
Thermal Resistance Junction-to-Ambient (SOT-23)	$R_{\theta JA}$	340	°C/W
Total Device Dissipation Alumina Substrate (Note 2)	P _D	400	mW
T _A = 25°C Derate above 25°C		2.4	mW/°C
Thermal Resistance Junction-to-Ambient	$R_{\theta JA}$	250	°C/W
Junction and Storage Temperature Range	T _J , T _{stg}	-55 to +175	°C

- 1. FR-5 = $1.0 \times 0.75 \times 0.062$ in.
- 2. Alumina = $0.4 \times 0.3 \times 0.024$ in. 99.5% alumina.

ELECTRICAL CHARACTERISTICS ($T_A = 25$ °C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
Reverse Voltage Leakage Current		I _R			μAdc
(V _R = 100 Vdc)	BASH19		_	0.1	
(V _R = 150 Vdc)	BASH20		_	0.1	
(V _R = 200 Vdc)	BASH21		-	0.1	
$(V_R = 100 \text{ Vdc}, T_J = 175^{\circ}\text{C})$	BASH19		-	100	
$(V_R = 150 \text{ Vdc}, T_J = 175^{\circ}\text{C})$	BASH20		-	100	
$(V_R = 200 \text{ Vdc}, T_J = 175^{\circ}\text{C})$	BASH21		_	100	
Reverse Breakdown Voltage		V _(BR)			Vdc
(I _{BR} = 100 μAdc)	BASH19	()	120	-	
(I _{BR} = 100 μAdc)	BASH20		200	-	
(I _{BR} = 100 μAdc)	BASH21		250	-	
Forward Voltage		V _F			Vdc
(I _F = 100 mAdc)			_	1.0	
(I _F = 200 mAdc)			_	1.25	
Diode Capacitance (V _R = 0, f = 1.0 MHz)		C _D	-	5.0	pF
Reverse Recovery Time ($I_F = I_R = 30 \text{ mAdc}, I_{R(REC)} = 3 \text{ mAdc}$	5.0 mAdc, R _L = 100)	t _{rr}	-	50	ns

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

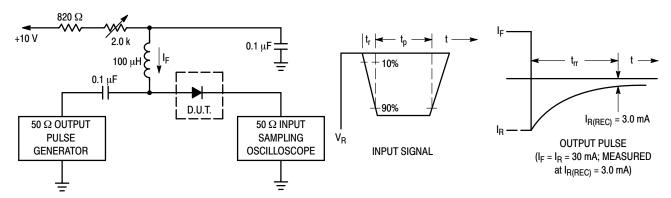

Notes: 1. A 2.0 $k\Omega$ variable resistor adjusted for a Forward Current (I_F) of 30 mA.

- 2. Input pulse is adjusted so $I_{R(peak)}$ is equal to 30 mA.
- 3. $t_p \gg t_{rr}$

Figure 1. Recovery Time Equivalent Test Circuit

BASH19L Series

TYPICAL CHARACTERISTICS

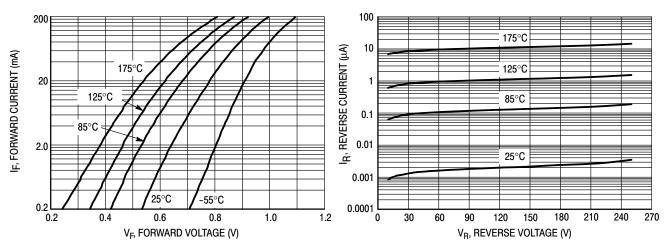


Figure 2. Forward Voltage

Figure 3. Leakage Current

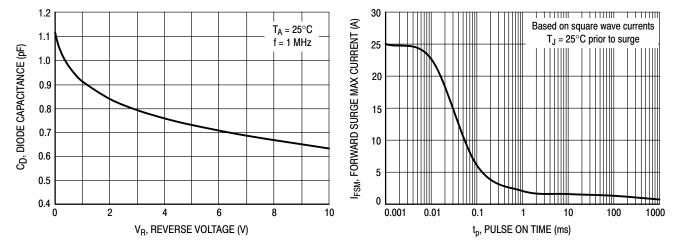


Figure 4. Capacitance

Figure 5. Forward Surge Current

ORDERING INFORMATION

Device	Package	Shipping [†]
BASH19LT1G	SOT-23 (Pb-Free)	3000 / Tape & Reel
NSVBASH19LT1G*	SOT-23 (Pb-Free)	3000 / Tape & Reel
BASH20LT1G	SOT-23 (Pb-Free)	3000 / Tape & Reel
NSVBASH20LT1G*	SOT-23 (Pb-Free)	3000 / Tape & Reel
BASH21LT1G	SOT-23 (Pb-Free)	3000 / Tape & Reel
NSVBASH21LT1G*	SOT-23 (Pb-Free)	3000 / Tape & Reel

[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

^{*}NSV Prefixes for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable - release available upon request.

onsemi, Onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

onsemi:

BASH21LT1G NSVBASH21LT1G BASH19LT1G BASH20LT1G NSVBASH20LT1G NSVBASH19LT1G