

BUV27

NPN Silicon Power Transistor

This device is designed for use in switching regulators and motor control.

Features

- Low Collection Emitter Saturation Voltage
- Fast Switching Speed
- These Devices are Pb-Free and are RoHS Compliant*

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Sustaining Voltage	V_{CEO}	120	Vdc
Collector-Emitter Breakdown Voltage	V_{CBO}	240	Vdc
Emitter-Base Voltage	V_{EBO}	7.0	Vdc
Collector Current – Continuous	I_C	12	Adc
Collector Current – Peak (Note 1)	I_{CM}	20	Adc
Base Current	I_B	4.0	Adc
Total Device Dissipation ($T_C = 25^\circ\text{C}$) Derate above 25°C	P_D	70 0.56	W W/ $^\circ\text{C}$
Operating and Storage Temperature	T_J, T_{stg}	- 65 to 150	$^\circ\text{C}$

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Pulse Test: Pulse Width = 5.0 ms, Duty Cycle $\leq 10\%$.

THERMAL CHARACTERISTICS

Rating	Symbol	Max	Unit
Thermal Resistance, Junction-to-Case Junction-to-Ambient	$R_{\theta JC}$ $R_{\theta JA}$	1.78 62.5	$^\circ\text{C/W}$




ON Semiconductor®


www.onsemi.com

POWER TRANSISTOR 12 AMPERES 120 VOLTS 70 WATTS

SCHEMATIC



MARKING DIAGRAM

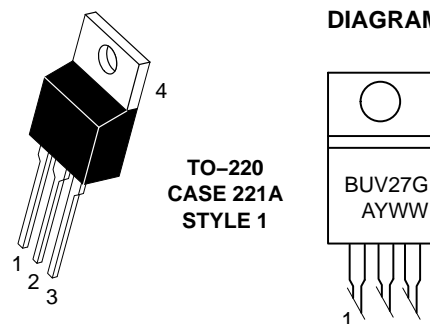

BUV27 = Device Code
A = Assembly Location
Y = Year
WW = Work Week
G = Pb-Free Package

ORDERING INFORMATION

Device	Package	Shipping
BUV27G	TO-220 (Pb-Free)	50 per Rail

*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

BUV27

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
I _{CER}	Collector Cut-off Current (R _{BE} = 50 Ω)	V _{CE} = 240 V, T _C = 125°C			3.0	mA
I _{CEX}	Collector Cut-off Current	V _{CE} = 240 V, V _{BE} = -1.5 V, T _C = 125°C			1.0	mA
I _{EBO}	Emitter Cut-off Current (I _C = 0)	V _{BE} = 5 V			1.0	mA
V _{CEO(sus)}	Collector-Emitter Sustaining Voltage	I _C = 0.2 A, L = 25 mH	120			V
V _{EBO}	Emitter-Base Voltage (I _C = 0)	I _E = 50 mA	7.0		30	V
V _{CE(sat)} (Note 2)	Collector-Emitter Saturation Voltage	I _C = 4 A, I _B = 0.4 A I _C = 8 A, I _B = 0.8 A			0.7 1.5	V
V _{BE(sat)} (Note 2)	Base-Emitter Saturation Voltage	I _C = 8 A, I _B = 0.8 A			2.0	V

Resistive Load

t _{on}	Turn-on Time	V _{CC} = 90 V, I _C = 8 A		0.4	0.8	ms
t _s	Storage Time	V _{BE} = -6 V, I _{B1} = 0.8 A		0.5	1.2	μs
t _f	Fall Time	R _{BB} = 3.75 Ω		0.12	0.25	μs

Inductive Load

t _s	Storage Time	V _{CC} = 90 V, I _C = 8 A		0.6		μs
t _f	Fall Time	I _{B1} = 0.8 A, V _{BE} = -5 V L _B = 1 μH		0.04		
t _s	Storage Time	V _{CC} = 90 V, I _C = 8 A			2.0	
t _f	Fall Time	I _{B1} = 0.8 A, V _{BE} = -5 V L _B = 1 μH, T _J = 125°C			0.15	

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

2. Pulsed: Pulse Duration = 300 μs, Duty Cycle = 2%

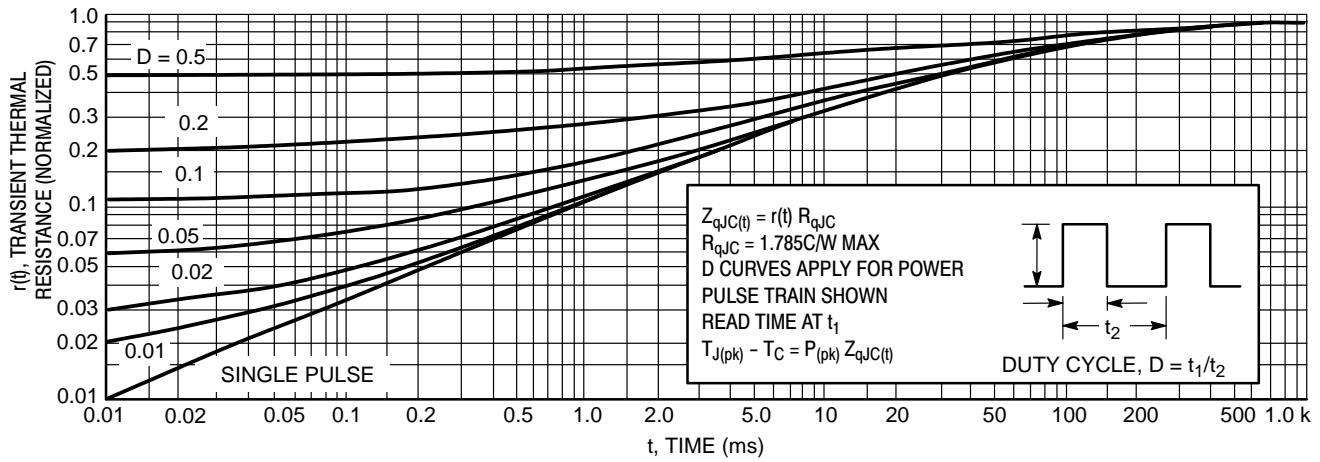


Figure 1. Thermal Response

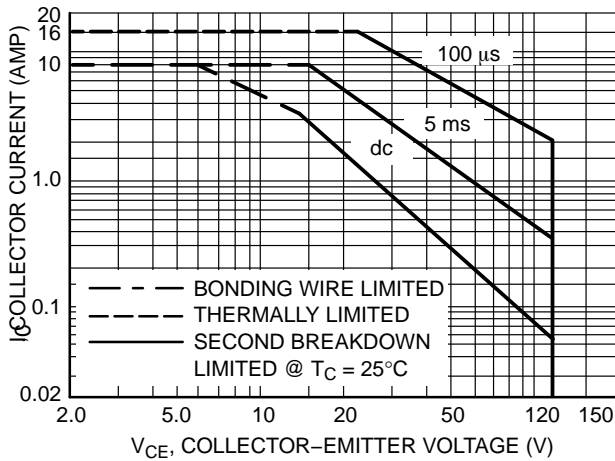


Figure 2. Forward Bias Safe Operating Area

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation, i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figures 2 is based on $T_{J(pk)} = 150^\circ\text{C}$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} < 150^\circ\text{C}$. $T_{J(pk)}$ may be calculated from the data in Figure 1. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

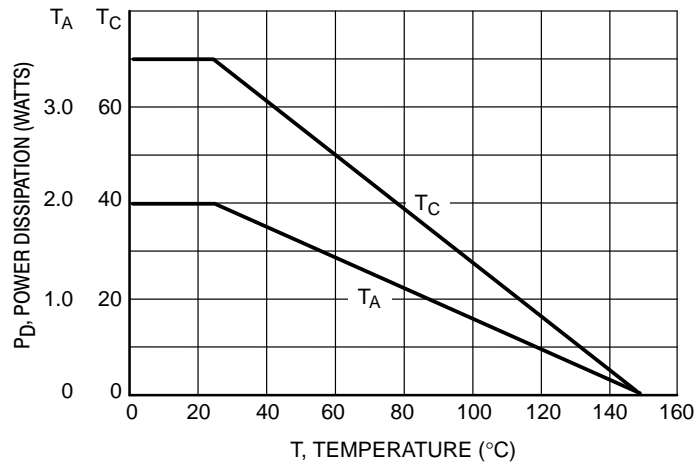


Figure 3. Power Derating

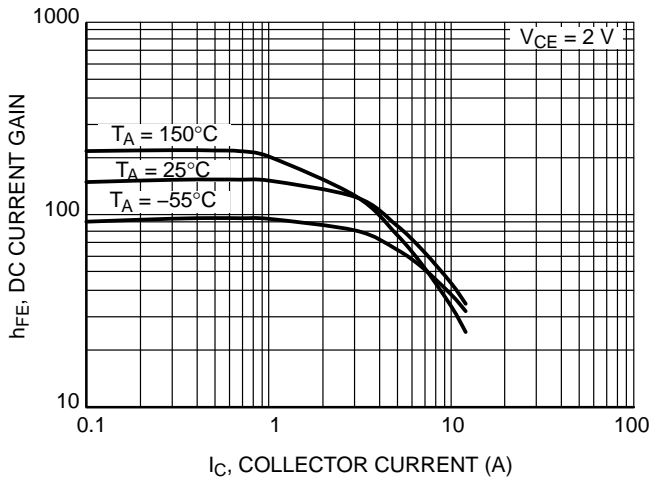


Figure 4. DC Current Gain vs. Collector Current

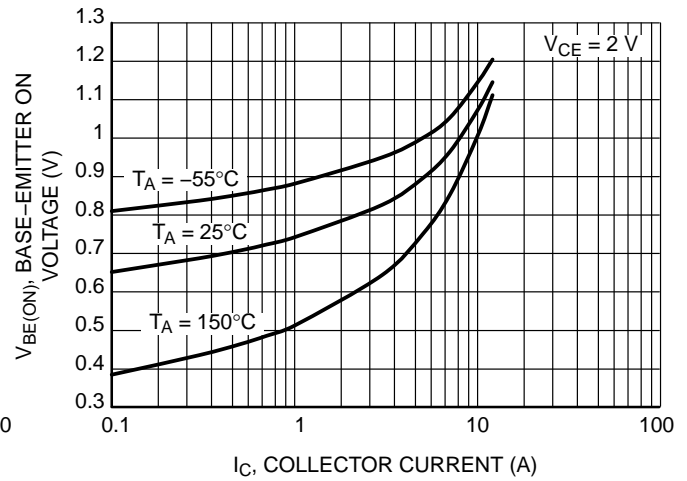


Figure 5. Base-Emitter Turn-ON Voltage vs. Collector Current

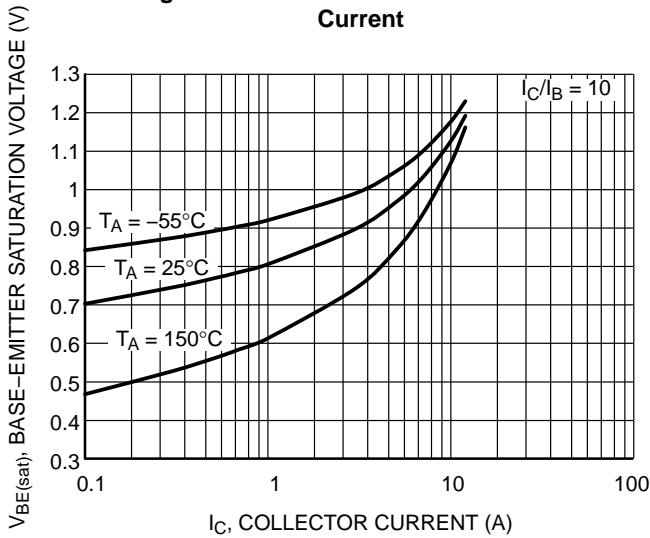


Figure 6. Base-Emitter Saturation Voltage vs. Collector Current

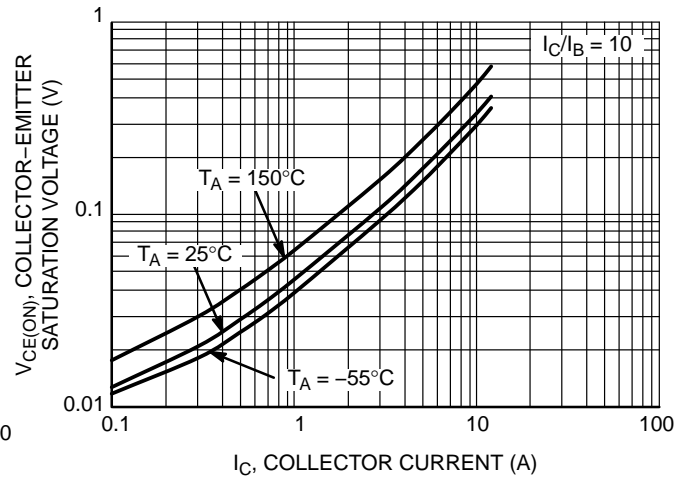


Figure 7. Collector-Emitter Saturation Voltage vs. Collector Current

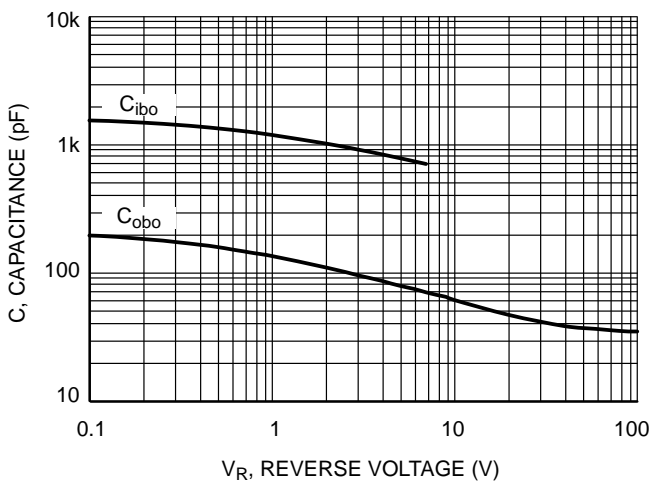


Figure 8. Capacitance


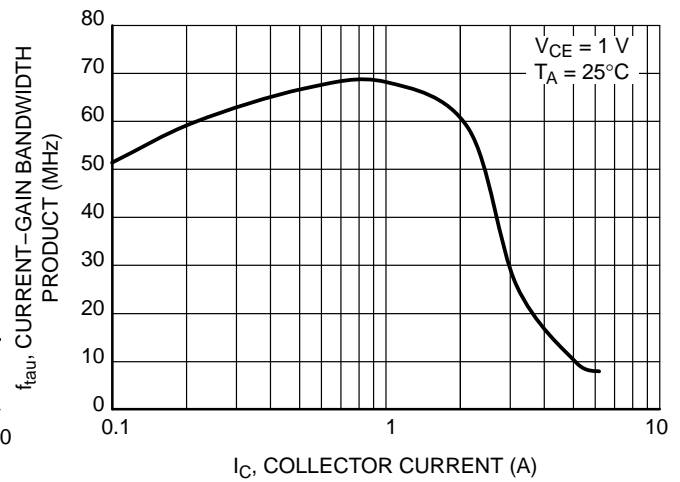


Figure 9. Current Gain Bandwidth Product vs. Collector Current

BUV27

PACKAGE DIMENSIONS

TO-220
CASE 221A-09
ISSUE AH

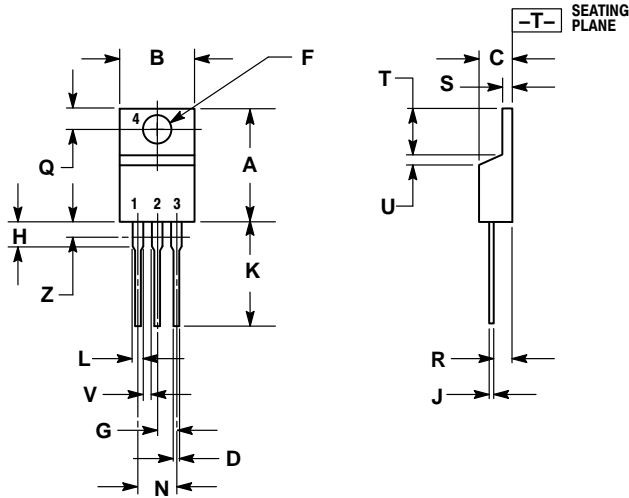


NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.570	0.620	14.48	15.75
B	0.380	0.415	9.66	10.53
C	0.160	0.190	4.07	4.83
D	0.025	0.038	0.64	0.96
F	0.142	0.161	3.61	4.09
G	0.095	0.105	2.42	2.66
H	0.110	0.161	2.80	4.10
J	0.014	0.024	0.36	0.61
K	0.500	0.562	12.70	14.27
L	0.045	0.060	1.15	1.52
N	0.190	0.210	4.83	5.33
Q	0.100	0.120	2.54	3.04
R	0.080	0.110	2.04	2.79
S	0.045	0.055	1.15	1.39
T	0.235	0.255	5.97	6.47
U	0.000	0.050	0.00	1.27
V	0.045	---	1.15	---
Z	---	0.080	---	2.04

STYLE 1:

1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

ON Semiconductor and the  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC) or its subsidiaries in the United States and/or other countries. SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ON Semiconductor:](#)

[BUV27](#) [BUV27G](#)