## MBRM110ET1G, NRVBM110ET1G

# Schottky Power Rectifier, Surface Mount, 1.0 A, 10 V

The Schottky POWERMITE<sup>®</sup> employs the Schottky Barrier principle with a barrier metal and epitaxial construction that produces optimal forward voltage drop–reverse current tradeoff. The advanced packaging techniques provide for a highly efficient micro miniature, space saving surface mount Rectifier. With its unique heatsink design, the POWERMITE<sup>®</sup> has the same thermal performance as the SMA while being 50% smaller in footprint area, and delivering one of the lowest height profiles, < 1.1 mm in the industry. Because of its small size, it is ideal for use in portable and battery powered products such as cellular and cordless phones, chargers, notebook computers, printers, PDAs and PCMCIA cards. Typical applications are AC–DC and DC –DC converters, reverse battery protection, and "ORing" of multiple supply voltages and any other application where performance and size are critical.

### Features

- Low I<sub>R</sub> Extends Battery Life
- Low Profile Maximum Height of 1.1 mm
- Small Footprint Footprint Area of 8.45 mm<sup>2</sup>
- 150°C Operating Junction Temperature
- Low Thermal Resistance with Direct Thermal Path of Die on Exposed Cathode Heat Sink
- ESD Ratings:
  - ◆ Human Body Model = 3B (> 16 kV)
  - Machine Model = V (> 400 V)
- AEC-Q101 Qualified and PPAP Capable
- NRVB Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements
- All Packages are Pb-Free\*

### **Mechanical Characteristics:**

- POWERMITE<sup>®</sup> is JEDEC Registered as D0–216AA
- Case: Molded Epoxy
- Epoxy Meets UL 94 V-0 @ 0.125 in
- Weight: 16.3 mg (Approximately)
- Lead and Mounting Surface Temperature for Soldering Purposes: 260°C Maximum for 10 Seconds



### **ON Semiconductor®**

http://onsemi.com

## SCHOTTKY BARRIER RECTIFIER 1.0 AMPERES, 10 VOLTS



POWERMITE CASE 457 PLASTIC

#### MARKING DIAGRAM



M = Date Code

- 1E1 = Device Code
  - = Pb-Free Package

#### **ORDERING INFORMATION**

Device	Package	Shipping <sup>†</sup>
MBRM110ET1G	POWERMITE (Pb-Free)	3,000 / Tape & Reel
NRVBM110ET1G	POWERMITE (Pb-Free)	3,000 / Tape & Reel
MBRM110ET3G	POWERMITE (Pb-Free)	12,000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

## MBRM110ET1G, NRVBM110ET1G

### MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V <sub>RRM</sub> V <sub>RWM</sub> V <sub>R</sub>	10	V
Average Rectified Forward Current $(T_L = 100^{\circ}C)$	Ι <sub>Ο</sub>	1.0	A
Non-Repetitive Peak Surge Current (Non-Repetitive peak surge current, halfwave, single phase, 60 Hz)	I <sub>FSM</sub>	50	A
Storage Temperature	T <sub>stg</sub>	–55 to +150	°C
Operating Junction Temperature	TJ	–55 to +150	°C
Voltage Rate of Change (Rated V <sub>R</sub> , T <sub>J</sub> = 25°C)	dv/dt	10,000	V/µs

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

#### THERMAL CHARACTERISTICS

Characteristic		Value	Unit
Thermal Resistance, Junction-to-Lead (Anode) (Note 1)	R <sub>tjl</sub>	35	°C/W
Thermal Resistance, Junction-to-Tab (Cathode) (Note 1)	R <sub>tjtab</sub>	23	
Thermal Resistance, Junction-to-Ambient (Note 1)	R <sub>tja</sub>	277	

1. Mounted with minimum recommended pad size, PC Board FR4, See Figures 8 and 9.

### **ELECTRICAL CHARACTERISTICS**

Characteristic	Symbol	Value		Unit
Maximum Instantaneous Forward Voltage (Note 2)	V <sub>F</sub>	T <sub>J</sub> = 25°C	T <sub>J</sub> = 100°C	V
(I <sub>F</sub> = 0.1 A) (I <sub>F</sub> = 1.0 A) (I <sub>F</sub> = 2.0 A)	V <sub>F</sub>	0.455 0.530 0.595	0.360 0.455 0.540	V
Maximum Instantaneous Reverse Current (Note 2)	I <sub>R</sub>	T <sub>J</sub> = 25°C	T <sub>J</sub> = 100°C	μΑ
(V <sub>R</sub> = 5.0 V) (V <sub>R</sub> = 10 V)		0.5 1.0	300 500	

2. Pulse Test: Pulse Width  $\leq$  250 µs, Duty Cycle  $\leq$  2%.

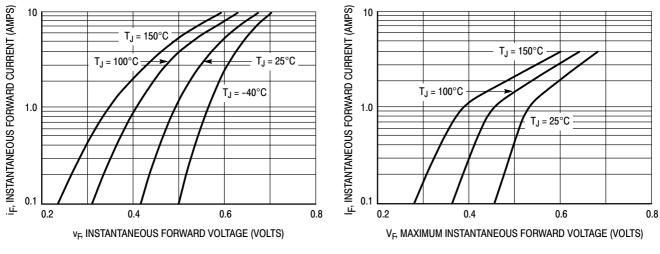
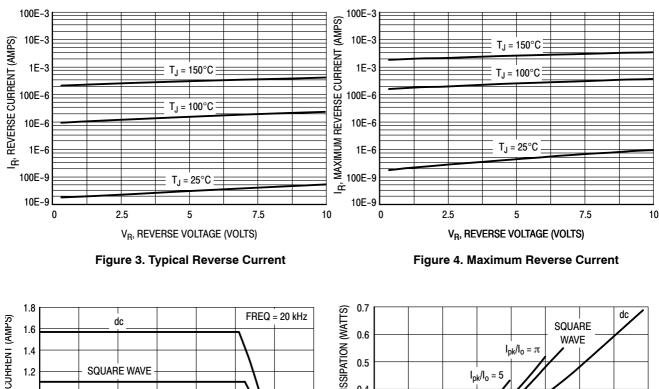


Figure 1. Typical Forward Voltage

Figure 2. Maximum Forward Voltage

## MBRM110ET1G, NRVBM110ET1G



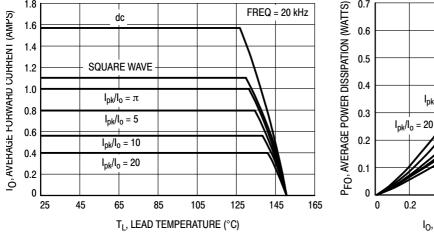


Figure 5. Current Derating



0.8

1.0

1.2


1.4

1.6


 $I_{pk}/I_o = 10$ 

0.4

0.6

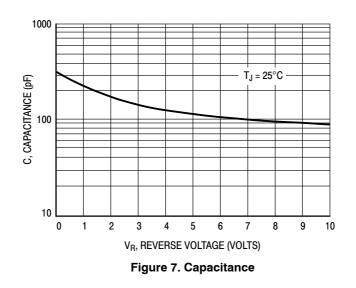

### MBRM110ET1G, NRVBM110ET1G

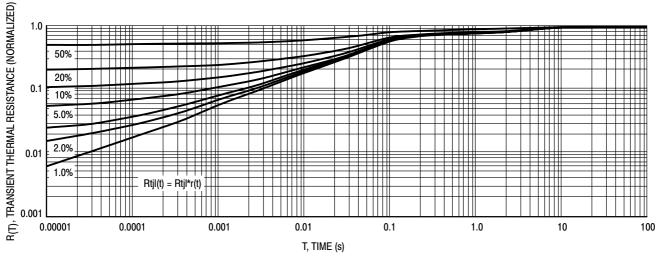




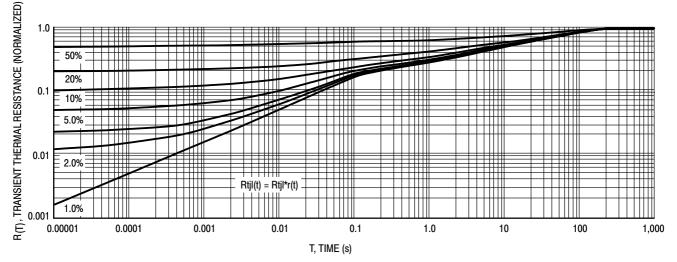


Figure 9. Thermal Response Junction to Ambient

POWERMITE is a registered trademark of and used under a license from Microsemi Corporation.



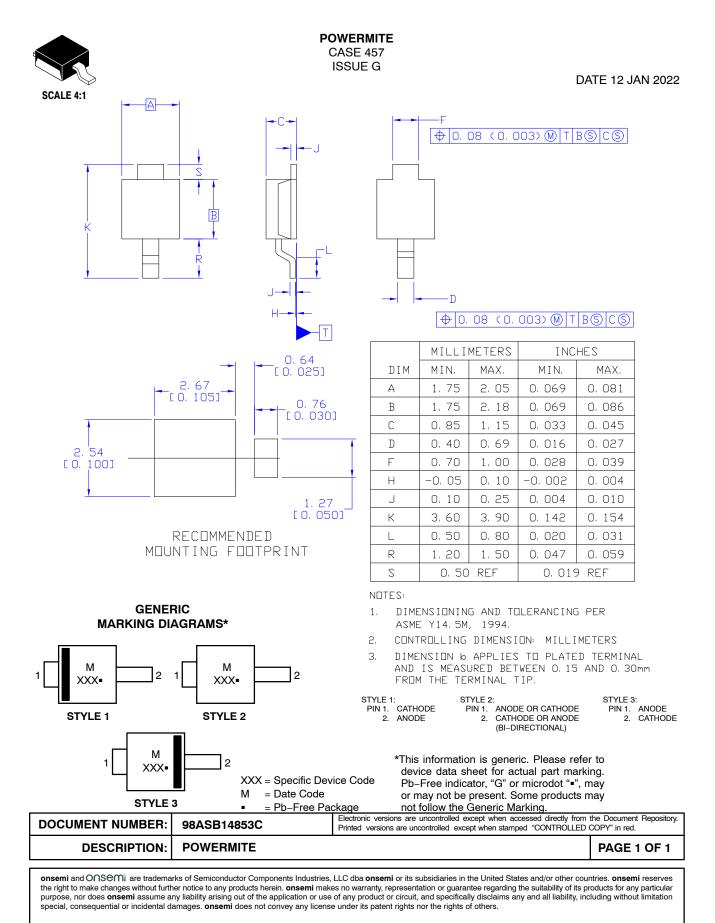

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent\_Marking.pdf</u>. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or indental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification. Buyer shall indemnify and hold onsemi and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs,

#### ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation onsemi Website: www.onsemi.com

ONLINE SUPPORT: <u>www.onsemi.com/support</u> For additional information, please contact your local Sales Representative at <u>www.onsemi.com/support/sales</u>

# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

onsemi:

MBRM110ET1 MBRM110ET1G MBRM110ET3 MBRM110ET3G NRVBM110ET1G