


Panasonic

High Sensitivity, with  
100mW nominal operating  
power, in a compact and  
space saving case

GN RELAYS



## FEATURES

- 1. Compact slim body saves space.**  
Thanks to the small surface area of 5.7 mm × 10.6 mm .224 inch × .417 inch and low height of 9.0 mm .354 inch, the packaging density can be increased to allow for much smaller designs.
- 2. High sensitivity single side stable type (Nominal operating power: 100mW) is available.**
- 3. Outstanding surge resistance**  
Surge breakdown voltage between contacts and coil:  
2,500 V 2×10 μs (Telcordia)  
Surge breakdown voltage between open contacts:  
1,500 V 10×160 μs (FCC part 68)
- 4. The use of twin crossbar contacts ensures high contact reliability.**  
AgPd contact is used because of its good sulfide resistance. Adopting low-gas molding material. Coil assembly molding technology which avoids generating volatile gas from coil.
- 5. Increased packaging density**  
Due to highly efficient magnetic circuit design, leakage flux is reduced and changes in electrical characteristics from components being mounted

close-together are minimized. This all means a packaging density higher than ever before.

- 6. Nominal operating power: 140 mW**
- 7. Outstanding vibration and shock resistance**  
Functional shock resistance: 750 m/s<sup>2</sup>  
Destructive shock resistance: 1,000 m/s<sup>2</sup>  
Functional vibration resistance: 10 to 55 Hz (at double amplitude of 3.3 mm .130 inch)  
Destructive vibration resistance: 10 to 55 Hz (at double amplitude of 5 mm .197 inch)
- 8. Sealed construction allows automatic washing.**
- 9. Sealed according to RTIII (IP67)**

## TYPICAL APPLICATIONS

- 1. Telephone switchboard**
- 2. Telecommunications equipment**
- 3. Security equipment**
- 4. Test and measurement equipment**
- 5. Electronic consumer and audio visual equipment**

## ORDERING INFORMATION

AGN	2		0				
Contact arrangement 2: 2 Form C							
Operating function 0: Single side stable 1: 1 coil latching 6: High sensitivity single side stable type							
Type of operation 0: Standard type (B.B.M.)							
Terminal shape Nil: Standard PC board terminal A: Surface-mount terminal A type S: Surface-mount terminal S type							
Nominal coil voltage (DC) 1H: 1.5V 03: 3V 4H: 4.5V 06: 6V 09: 9V 12: 12V 24: 24V							
Packing style Nil: Tube packing X: Tape and reel packing (picked from 1/2/3/4 pin side) Z: Tape and reel packing (picked from 5/6/7/8 pin side)							

# GN (AGN)

## TYPES

### 1. Standard PC board terminal

Nominal coil voltage	Single side stable	1 coil latching	High sensitivity single side stable
	Part No.	Part No.	Part No.
1.5V DC	AGN2001H	AGN2101H	AGN2601H
3V DC	AGN20003	AGN21003	AGN26003
4.5V DC	AGN2004H	AGN2104H	AGN2604H
6V DC	AGN20006	AGN21006	AGN26006
9V DC	AGN20009	AGN21009	AGN26009
12V DC	AGN20012	AGN21012	AGN26012
24V DC	AGN20024	AGN21024	AGN26024

Standard packing: Tube: 50 pcs.; Case: 1,000 pcs.

### 2. Surface-mount terminal

#### 1) Tube packing

Nominal coil voltage	Single side stable	1 coil latching	High sensitivity single side stable
	Part No.	Part No.	Part No.
1.5V DC	AGN200□1H	AGN210□1H	AGN260□1H
3V DC	AGN200□03	AGN210□03	AGN260□03
4.5V DC	AGN200□4H	AGN210□4H	AGN260□4H
6V DC	AGN200□06	AGN210□06	AGN260□06
9V DC	AGN200□09	AGN210□09	AGN260□09
12V DC	AGN200□12	AGN210□12	AGN260□12
24V DC	AGN200□24	AGN210□24	AGN260□24

□: For each surface-mounted terminal identification, input the following letter. A type: A, S type: S

Standard packing: Tube: 50 pcs.; Case: 1,000 pcs.

#### 2) Tape and reel packing

Nominal coil voltage	Single side stable	1 coil latching	High sensitivity single side stable
	Part No.	Part No.	Part No.
1.5V DC	AGN200□1HZ	AGN210□1HZ	AGN260□1HZ
3V DC	AGN200□03Z	AGN210□03Z	AGN260□03Z
4.5V DC	AGN200□4HZ	AGN210□4HZ	AGN260□4HZ
6V DC	AGN200□06Z	AGN210□06Z	AGN260□06Z
9V DC	AGN200□09Z	AGN210□09Z	AGN260□09Z
12V DC	AGN200□12Z	AGN210□12Z	AGN260□12Z
24V DC	AGN200□24Z	AGN210□24Z	AGN260□24Z

□: For each surface-mounted terminal identification, input the following letter. A type: A, S type: S

Standard packing: Tape and reel: 500 pcs.; Case: 1,000 pcs.

Notes: 1. Tape and reel packing symbol “-Z” is not marked on the relay. “X” type tape and reel packing (picked from 1/2/3/4-pin side) is also available.

2. Please inquire if you require a relay, between 1.5 and 24 V DC, with a voltage not listed.

## RATING

### 1. Coil data

#### 1) Single side stable type

Nominal coil voltage	Pick-up voltage (at 20°C 68°F)	Drop-out voltage (at 20°C 68°F)	Nominal operating current [±10%] (at 20°C 68°F)	Coil resistance [±10%] (at 20°C 68°F)	Nominal operating power	Max. applied voltage (at 20°C 68°F)
1.5V DC	75%V or less of nominal voltage* (Initial)	10%V or more of nominal voltage* (Initial)	93.8mA	16Ω	140mW	150%V of nominal voltage
3V DC			46.7mA	64.2Ω		
4.5V DC			31mA	145Ω		
6V DC			23.3mA	257Ω		
9V DC			15.5mA	579Ω		
12V DC			11.7mA	1,028Ω		
24V DC			9.6mA	2,504Ω	230mW	120%V of nominal voltage

#### 2) 1 coil latching type

Nominal coil voltage	Set voltage (at 20°C 68°F)	Reset voltage (at 20°C 68°F)	Nominal operating current [±10%] (at 20°C 68°F)	Coil resistance [±10%] (at 20°C 68°F)	Nominal operating power	Max. applied voltage (at 20°C 68°F)
1.5V DC	75%V or less of nominal voltage* (Initial)	75%V or less of nominal voltage* (Initial)	66.7mA	22.5Ω	100mW	150%V of nominal voltage
3V DC			33.3mA	90Ω		
4.5V DC			22.2mA	202.5Ω		
6V DC			16.7mA	360Ω		
9V DC			11.1mA	810Ω		
12V DC			8.3mA	1,440Ω		
24V DC			5.0mA	4,800Ω	120mW	

\*Pulse drive (JIS C 5442-1996)

## 3) High sensitivity single side stable type

Nominal coil voltage	Set voltage (at 20°C 68°F)	Reset voltage (at 20°C 68°F)	Nominal operating current [±10%] (at 20°C 68°F)	Coil resistance [±10%] (at 20°C 68°F)	Nominal operating power	Max. applied voltage (at 20°C 68°F)
1.5V DC	80%V or less of nominal voltage* (Initial)	10%V or more of nominal voltage* (Initial)	66.7mA	22.5Ω	100mW	150%V of nominal voltage
3V DC			33.3mA	90Ω		
4.5V DC			22.2mA	202.5Ω		
6V DC			16.7mA	360Ω		
9V DC			11.1mA	810Ω		
12V DC			8.3mA	1,440Ω		
24V DC			5.0mA	4,800Ω	120mW	120%V of nominal voltage

\*Pulse drive (JIS C 5442-1996)

## 2. Specifications

Characteristics		Item	Specifications
Contact	Arrangement		2 Form C
	Initial contact resistance, max.		Max. 100 mΩ (By voltage drop 6 V DC 1A)
	Contact material		Stationary contact: AgPd+Au clad    Movable contact: AgPd
Rating	Nominal switching capacity		1 A 30 V DC, 0.3 A 125 V AC (resistive load)
	Max. switching power		30 W (DC), 37.5 V A (AC) (resistive load)
	Max. switching voltage		110 V DC, 125 V AC
	Max. switching current		1 A
	Min. switching capacity (Reference value)*1		10μA 10 mV DC
	Nominal operating power	Single side stable	140mW (1.5 to 12 V DC), 230mW (24 V DC)
		High sensitivity single side stable type	100mW (1.5 to 12 V DC), 120mW (24 V DC)
1 coil latching			
Electrical characteristics	Insulation resistance (Initial)		Min. 1,000MΩ (at 500V DC) Measurement at same location as “Initial breakdown voltage” section.
	Breakdown voltage (Initial)	Between open contacts	750 Vrms for 1min. (Detection current: 10mA)
		Between contact and coil	1,500 Vrms for 1min. (Detection current: 10mA)
		Between contact sets	1,000 Vrms for 1min. (Detection current: 10mA)
	Surge breakdown voltage (Initial)	Between open contacts	1,500 V (10×160μs) (FCC Part 68)
		Between contacts and coil	2,500 V (2×10μs) (Telcordia)
	Temperature rise (at 20°C 68°F)		Max. 50°C (By resistive method, nominal coil voltage applied to the coil; contact carrying current: 1A.)
	Operate time [Set time] (at 20°C 68°F)		Max. 4 ms [Max. 4 ms] (Nominal coil voltage applied to the coil, excluding contact bounce time.)
Release time [Reset time] (at 20°C 68°F)		Max. 4 ms [Max. 4 ms] (Nominal coil voltage applied to the coil, excluding contact bounce time.) (without diode)	
Mechanical characteristics	Shock resistance	Functional	Min. 750 m/s <sup>2</sup> (Half-wave pulse of sine wave: 6 ms; detection time: 10μs.)
		Destructive	Min. 1,000 m/s <sup>2</sup> (Half-wave pulse of sine wave: 6 ms.)
	Vibration resistance	Functional	10 to 55 Hz at double amplitude of 3.3 mm (Detection time: 10μs.)
		Destructive	10 to 55 Hz at double amplitude of 5 mm
Expected life	Mechanical		Min. 5 × 10 <sup>7</sup> (at 180 times/min.)
	Electrical		Min. 10 <sup>5</sup> (1 A 30 V DC resistive), 10 <sup>5</sup> (0.3 A 125 V AC resistive) (at 20 times/min.)
Conditions	Conditions for operation, transport and storage*2		Ambient temperature: (Single side stable, 1 coil latching type) −40°C to +85°C −40°F to +185°F (High sensitivity single side stable type) −40°C to +70°C −40°F to +158°F Humidity: 5 to 85% R.H. (Not freezing and condensing at low temperature)
	Max. operating speed (at rated load)		20 times/min.
Unit weight			Approx. 1 g .035 oz


Notes:

\*1 This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.


\*2 Refer to "6. Usage, Storage and Transport Conditions" in [AMBIENT ENVIRONMENT section in Relay Technical Information](#).

## REFERENCE DATA


## 1. Max. switching capacity

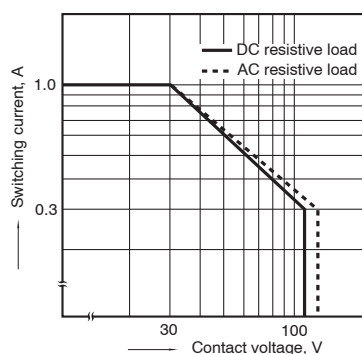

## 2. Life curve

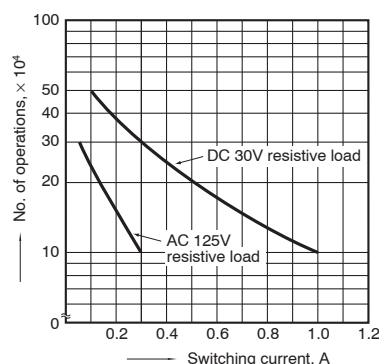


## 3. Mechanical life

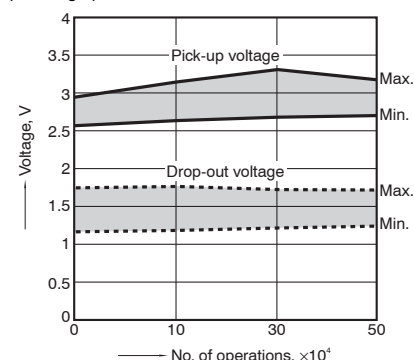
Tested sample: AGN2004H, 15 pcs.;  
Operating speed: 180 times/min.

GN (AGN)


4. Electrical life (1A 30V DC resistive load)  
Tested sample: AGN2004H, 6 pcs.  
Operating speed: 20 cpm  
Change of pick-up and drop-out voltage

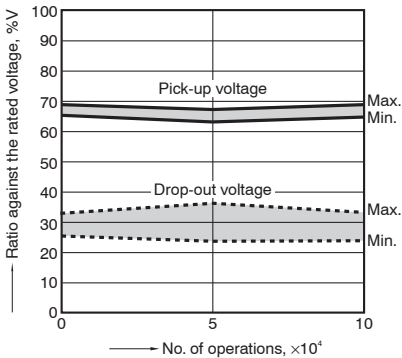


Change of contact resistance

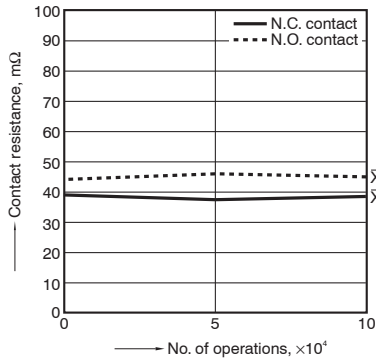


5. Coil temperature rise  
Tested sample: AGN2004H, AGN20024, 6 pcs.  
Point measured: Inside the coil  
Ambient temperature: Room temperature

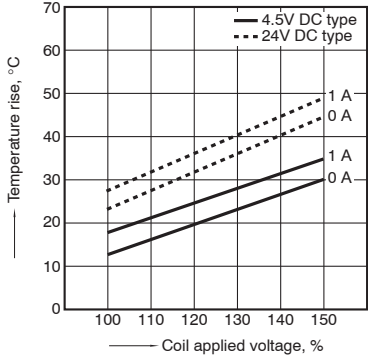


6-(1). Operate and release time (without diode)  
Tested sample: AGN2004H, 6 pcs.

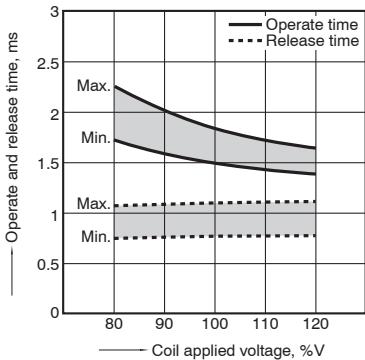


6-(2). Operate and release time (with diode)  
Tested sample: AGN2004H, 6 pcs.

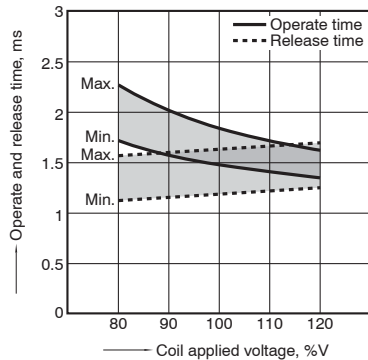


7. Ambient temperature characteristics  
Tested sample: AGN2004H, 6 pcs.




8. Malfunctional shock  
Tested sample: AGN2004H

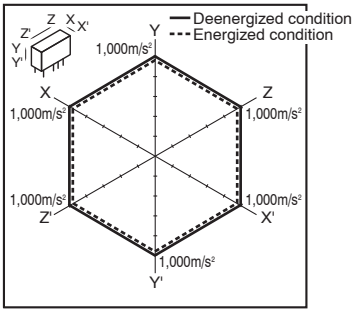

9-(1). Influence of adjacent mounting  
Tested sample: AGN20012, 6 pcs.

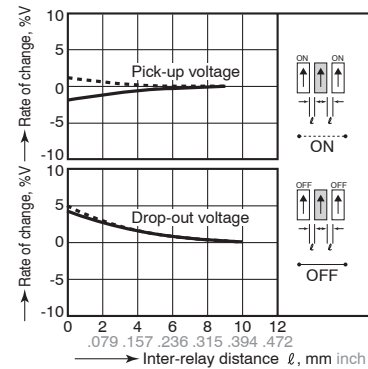

9-(2). Influence of adjacent mounting  
Tested sample: AGN20012, 6 pcs.

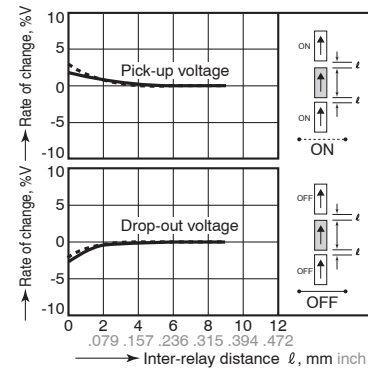

DIMENSIONS (mm inch)


Download [CAD Data](#) from our Web site.

1. PC board terminal


[CAD Data](#)



External dimensions  
Standard type

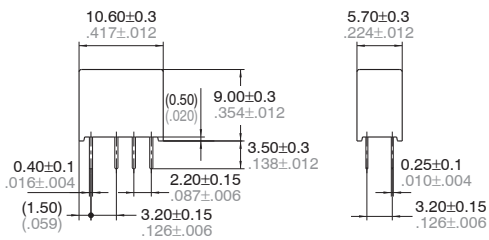


PC board pattern




Schematic (Bottom view)

Single side stable  
High sensitivity  
single side stable



(Deenergized condition)

1 coil latching



(Reset condition)

## 2. Surface-mount terminal


**CAD Data**




Type	External dimensions	Suggested mounting pad (Tolerance: $\pm 0.1 \pm .004$ )
	Single side stable/1 coil latching/High sensitivity single side stable	Single side stable/1 coil latching/High sensitivity single side stable
A type		
S type		

### Schematic (Top view)

Single side stable  
High sensitivity single side stable




1 coil latching



## NOTES

## 1. Packing style


1) The relay is packed in a tube with the relay orientation mark on the left side, as shown in the figure below.

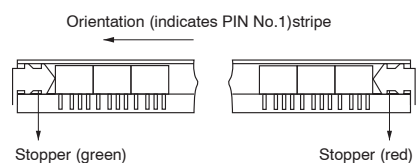

## 2) Tape and reel packing


(A type)

(1)-1 Tape dimensions

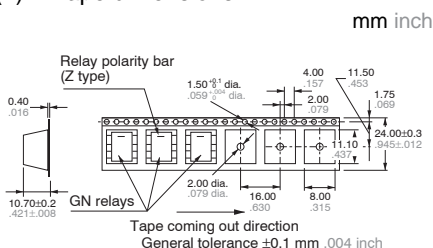


(S type)

(1)-2 Tape dimensions

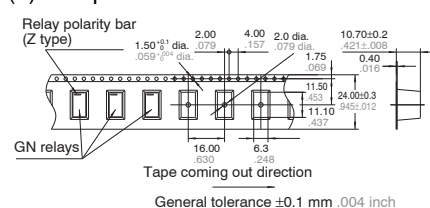

(2) Dimensions of plastic peel

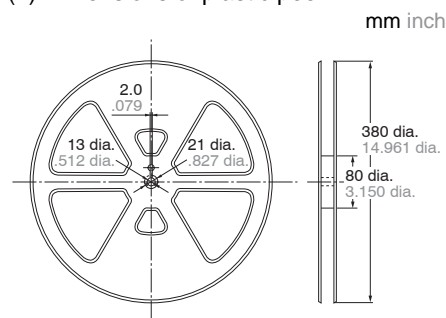

## 2. Automatic insertion

To maintain the internal function of the relay, the chucking pressure should not exceed the values below.

Chucking pressure in the direction A:


4.9 N {500gf} or less


Chucking pressure in the direction B:

9.8 N {1 kgf} or less

Chucking pressure in the direction C:

9.8 N {1 kgf} or less



Please chuck the  portion.  
Avoid chucking the center of the relay.  
In addition, excessive chucking pressure  
to the pinpoint of the relay should be  
avoided.

**For Cautions for Use, see [Relay Technical Information](#).**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Panasonic:

[AGN200A4HZ](#) [AGN200A12Z](#) [AGN210A4HZ](#) [AGN200A03X](#) [AGN200A06X](#) [AGN200A09X](#) [AGN200A09Z](#)  
[AGN200A12X](#) [AGN200A1HX](#) [AGN200A1HZ](#) [AGN200A24X](#) [AGN200A4HX](#) [AGN200S06Z](#) [AGN200S09Z](#)  
[AGN200S1HZ](#) [AGN210A03X](#) [AGN210A03Z](#) [AGN210A06X](#) [AGN210A06Z](#) [AGN210A09X](#) [AGN210A09Z](#)  
[AGN210A12X](#) [AGN210A12Z](#) [AGN210A1HX](#) [AGN210A1HZ](#) [AGN210A24X](#) [AGN210A24Z](#) [AGN210A4HX](#)  
[AGN210S03Z](#) [AGN210S06Z](#) [AGN210S09Z](#) [AGN210S12Z](#) [AGN210S1HZ](#) [AGN210S24Z](#) [AGN200A03Z](#)  
[AGN200S03Z](#) [AGN200S4HZ](#) [AGN210S4HZ](#) [AGN200A06Z](#) [AGN200S12Z](#) [AGN200A24Z](#) [AGN200S24Z](#)  
[AGN260A4HZ](#) [AGN2104HZ](#) [AGN2104HX](#) [AGN200S03X](#) [AGN200S06X](#) [AGN200S09X](#) [AGN200S12X](#) [AGN200S24X](#)  
[AGN200S4HX](#) [AGN260S24Z](#) [AGN260S4HX](#) [AGN260S4HZ](#) [AGN260S09Z](#) [AGN260S12X](#) [AGN260S12Z](#)  
[AGN260S1HX](#) [AGN260S1HZ](#) [AGN260S24X](#) [AGN260A4HX](#) [AGN260S03X](#) [AGN260S03Z](#) [AGN260S06X](#)  
[AGN260S06Z](#) [AGN260S09X](#) [AGN260A12X](#) [AGN260A12Z](#) [AGN260A1HX](#) [AGN260A1HZ](#) [AGN260A24X](#)  
[AGN260A24Z](#) [AGN260A03X](#) [AGN260A03Z](#) [AGN260A06X](#) [AGN260A06Z](#) [AGN260A09X](#) [AGN260A09Z](#)  
[AGN210S03X](#) [AGN210S06X](#) [AGN210S09X](#) [AGN210S12X](#) [AGN210S24X](#) [AGN210S4HX](#)