Mini-Com® Faceplate Frames and Inserts



specifications

Faceplate frames shall be available in single and double gang versions and shall accept a variety of inserts. Executive design faceplate frames shall have a curved appearance and include labels and label covers. Inserts shall be available in sloped, sloped shuttered, and flat versions, and accept all modules for increased design flexibility. Modules shall be accessible from the front for easy moves, adds, and changes.





technical information

Mounting options:	Faceplate frames are compatible with wall board adapters (MWBA1 and MWBA-2G); single or double junction boxes; raceway mounting brackets			
Packaging:	Executive series faceplate frames include two labels, two label covers; all faceplate frames include 1" long #6-32 slotted pan head screws with non-threaded lead point			

key features and benefits

Modular	Faceplate frames accept all Panduit Inserts; inserts accept all Mini-Com® Modules for design flexibility				
Front access	Mini-Com® Modules are accessible from the front for easy moves, adds, and changes				
Sloped versions	Provide additional bend radius control to protect cable				
Shuttered versions	Integrated shuttered door keeps dust and debris out of unmated Mini-Com® Jack Modules				
Identification	Executive series faceplate frames can be clearly identified with labels; sloped shuttered version available with label option; Mini-Com® Modules can be clearly identified with optional icons				

applications

The combination of faceplate frames and inserts provide the design flexibility when installing connectivity in single or double gang junction boxes, wallboard adapters, and raceway mounting brackets. A variety of inserts enable front access to connectivity

for easy moves, adds, and changes. Sloped inserts are ideal for installations which require additional bend radius control and blank inserts allow for future growth. All inserts accept Mini-Com® Modules for copper, fiber, and audio/video applications.

Mini-Com® Faceplate Frames and Inserts

Single gang:

Executive Series Faceplate Frames

CBF*Y

Single gang.	OBL 1				
Double gang:	CBE*-2GY				
1/2 Size Inserts					
Sloped:	CHS2*-X				
Sloped, shuttered:	CHS2S*-X				
Sloped, recessed:	CHSRE2*-X				
Flat:	CHF2*-X				
Blank:	CHB2*-X				
1/3 Size Inserts					
Flat:	CHF2M*-X				
Blank:	CHB2M*-X				
1/3 Size D-Subminiature Inserts					
9-pin, female to female coupler:	CHD9C**Y				

emale coupler:	CHD9C
5-pin. female to	

female coupler: 15-pin, DB

connector mounted to a circuit board:


CHD15HDSC*Y

CHD15HDC*Y

See table for color and labeling options. Visit www.panduit.com for complete offering of copper, fiber, and audio/video modules.

Mini-Com® Faceplate Frames and Inserts

executive series faceplate frames

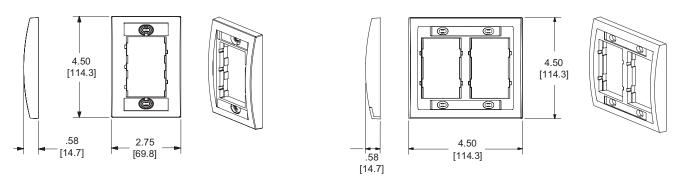

inserts

Dimensions are in inches. [Dimensions in brackets are metric].










1/2 Sloped Insert



1/2 Flat Insert

1/2 Sloped Recessed






1/3 Flat Insert



1/3 Blank Insert



color and labeling options

Part Number	IW	WH	EI	IG	BL	Laser/Ink jet	Panther LS8E
CBE**Y						C195X040Y1J	C195X040Y1C
CBE**-2GY						C288X040Y1J	C288X040Y1C
CHS2**-X							
CHS2S**-X							
CHSRE2**-X							
CHF2**-X							
CHB2**-X							
CHF2M**-X							
CHB2M**-X							
CHD9C**Y							
CHD15HDC**Y							
CHD15HDC**Y							

Gray shaded area depicts colors or labels are not available.

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA Phone: 800.777.3300

PANDUIT EUROPE LTD. London, UK Phone: 44.20.8601.7200 PANDUIT SINGAPORE PTE. LTD. Republic of Singapore Phone: 65.6305.7575

PANDUIT JAPAN Tokyo, Japan Phone: 81.3.6863.6000 PANDUIT LATIN AMERICA Guadalajara, Mexico Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD. Victoria, Australia Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

CHB2WH-X CHF2MIW-X CHS2WH-X CHS2SWH-X CHF2WH-X CBEWH-2GY CBEIW-2GY CHF2MWH-X CBEIWY CHS2SIW-X CHS2IW-X CHB2IW-X CHB2MWH-X CBEWHY CHF2IW-X CHB2MIW-X