

# QuickNet™ MTP\* Interconnect Cable Assemblies – Plenum (OFNP) Rated

## specifications

RoHS compliant MTP\* interconnect cable assemblies shall include one factory-terminated female MTP\* 12-fiber connector on each end of laser optimized OM3 fiber or OM1, OM2 or OS1 fiber. Jacketed cable is compliant with NFPA 262 (OFNP) flame rating. MTP\* interconnect cable assemblies shall meet or exceed the requirements of TIA/EIA-568-B.3. The MTP\* 12-fiber connector shall exceed the requirements of TIA/EIA-455-21A for 500 mating cycles. The MTP\* connector finishing process shall deliver uniform fiber height, low insertion loss and excellent return loss performance across the 12-fiber interface.



## technical information

<b>Standards requirements:</b>	MTP* connector exceeds TIA/EIA-455-21A: 1000 mating cycles (multimode) and 500 mating cycles (singlemode) Compliant with: TIA/EIA-568-B.3 and ISO/IEC 11801 IEC-61754-7 (International) TIA-604-5 (FOCIS-5) NFPA 262 (OFNP) flame rating
<b>Insertion loss:</b>	Per mated pair: 0.50dB typical; 0.75dB max. (multimode and singlemode)
<b>Return loss:</b>	20dB min. (multimode); 26dB min. (10Gig™ multimode); 55dB min. (singlemode)

## key features and benefits

<b>High-density 12-fiber ribbon cable</b>	Enables an easy and well organized high-density installation with design flexibility and lower installation costs
<b>Plenum rated jacket</b>	Meets NFPA 262 (OFNP) flame rating for standard compliant safety
<b>MTP* 12-fiber connector</b>	Easily connects network segments to reduce deployment time, improve reliability, and make maintenance easier
<b>FOCIS-5 compliant and backward compatible</b>	Assures performance with existing compliant MPO devices for cost effective integration
<b>MTP* mechanical design</b>	Precision plug yields lower average insertion loss for improved optical performance Interface design improvements assure durability and reliability
<b>Proprietary polishing process</b>	Unique MTP* connector termination enhancements deliver uniform fiber height across the 12-fiber interface Helps optimize connector to connector mating resulting in low insertion loss and excellent return loss performance
<b>Variety of fiber cable configurations</b>	Supports 10 GbE, multimode, and singlemode applications for design flexibility
<b>Certified 10 GbE performance</b>	10Gig™ MTP* Interconnect Cable Assemblies are tested per IEEE 802.3ae 10 GbE to support network transmission speeds up to 10 Gb/s for link lengths up to 300 meters at 850nm to assure high performance and reliability
<b>Test data supplied with each cable assembly</b>	Establishes a performance reference to streamline maintenance and troubleshooting

## applications

The QuickNet™ MTP\* Interconnect Cable Assembly is a component of the QuickNet™ Fiber Optic Cabling System. Pre-terminated 12-fiber MTP\* interconnect cable assemblies are used in high-density network applications to interconnect pre-terminated cassettes in main distribution, horizontal distribution, and equipment distribution areas. The QuickNet™ System meets the demands

of Gigabit Ethernet, 10 Gigabit Ethernet, and high speed Fibre Channel systems while maintaining compatibility with Ethernet, Fast Ethernet, FDDI and ATM. The high-density modular design fits into OPTICOM® QuickNet™ Rack Mount Fiber Cassette Enclosures to ensure efficient use of space and rapid network deployment.

\*MTP is a registered trademark of US Conec Ltd.

**www.panduit.com**

### QuickNet™ Plenum (OFNP) Multimode MTP\* Interconnect Cable Assemblies

OM3 – 10Gig™ 50/125µm:	FX12D5-5M*Y
OM2 – 50/125µm:	F512D5-5M*Y
OM1 – 62.5/125µm:	F612D5-5M*Y

### QuickNet™ Plenum (OFNP) Singlemode MTP\* Interconnect Cable Assemblies

OS1 – 9/125µm:	F912D5-5M*Y
----------------	-------------

### QuickNet™ Optimized 10Gig™ 50/125µm OM3 Pre-Terminated MTP\* Cassettes

6 LC to MTP* (12-fiber):	FCXO-12-10Y
12 LC to 2 MTP* (24-fiber):	FCXO-24-10Y
6 SC to MTP* (12-fiber):	FCXO-12-3Y

### QuickNet™ 10Gig™ 50/125µm OM3 Pre-Terminated MTP\* Cassettes

6 LC to MTP* (12-fiber):	FCX-12-10Y
12 LC to 2 MTP* (24-fiber):	FCX-24-10Y
12 SC to MTP* (12-fiber):	FCX-12-3SY
6 SC to MTP* (12-fiber):	FCX-12-3Y

### QuickNet™ 50/125µm OM2 Pre-Terminated MTP\* Cassettes

6 LC to MTP* (12-fiber):	FC5-12-10Y
12 LC to 2 MTP* (24-fiber):	FC5-24-10Y
12 SC to MTP* (12-fiber):	FC5-12-3SY
6 SC to MTP* (12-fiber):	FC5-12-3Y

### QuickNet™ 62.5/125µm OM1 Pre-Terminated MTP\* Cassettes

6 LC to MTP* (12-fiber):	FC6-12-10Y
12 LC to 2 MTP* (24-fiber):	FC6-24-10Y
12 SC to MTP* (12-fiber):	FC6-12-3SY
6 SC to MTP* (12-fiber):	FC6-12-3Y

### QuickNet™ 9/125µm OS1 Pre-Terminated MTP\* Cassettes

6 LC to MTP* (12-fiber):	FC9-12-10Y
12 LC to 2 MTP* (24-fiber):	FC9-24-10Y
12 SC to MTP* (12-fiber):	FC9-12-3SY
6 SC to MTP* (12-fiber):	FC9-12-3Y

### OPTICOM® QuickNet™ Rack Mount Fiber Cassette Enclosures

1 RU enclosure:	FCE1U
2 RU enclosure:	FCE2U
4 RU enclosure:	FCE4U

### OPTI-CORE® Riser (OFNR) Fiber Optic Patch Cords

Duplex LC to LC:	F^E10-10M*Y
Simplex SC to SC:	F^S3-3M*Y
Duplex SC to SC:	F^D3-3M*Y

### OPTI-CORE® Plenum (OFNP) Fiber Optic Patch Cords

Duplex LC to LC:	F^PE10-10M*
Simplex SC to SC:	F^PS3-3M*
Duplex SC to SC:	F^PD3-3M*

^Substitute for fiber type: X (OM3 – 10Gig™ 50/125µm), 5 (OM2 – 50/125µm), 6 (OM1 – 62.5/125µm) and 9 (OS1 – 9/125µm).


‡Substitute for length in meters: 1 – 10, or 15 – 30 in increments of 5 meters. Contact Customer Service for other available lengths or male MTPs\*.

# QUICKNET™ MTP\* Interconnect Cable Assemblies (OFNP)

The following base part number can be used for all QUICKNET™ MTP\* Interconnect Cable Assemblies (OFNP) by substituting ① the required fiber type for ^, and ② the required length in meters for ‡.

①  
**F^12D5-5M^Y**  
②

① ^ Substitute for fiber type: X (OM3 – 10Gig™ 50/125µm), 5 (OM2 – 50/125µm), 6 (OM1 – 62.5/125µm) and 9 (OS1 – 9/125µm).

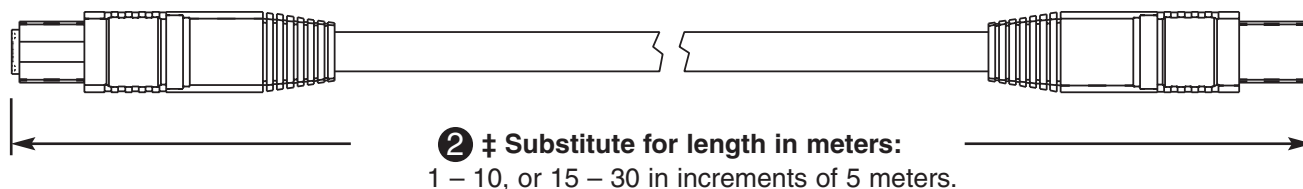

**Example: FX12D5-5M30Y =** QUICKNET™ 10Gig™ OFNP MTP\* Interconnect Cable Assembly OM3 – 10 GbE 50/125µm, female MTP\* connectors on both ends, 30 meters in length.

**NOTE:** All QUICKNET™ MTP\* Interconnect Cable Assemblies follow Method 'A' polarity per TIA/EIA-568-B.1-7 (key up, key down, straight through).

Part Number	Cable Type and Color	Connector Type and Color
<b>FX12D5-5M^Y</b>	Multimode plenum rated OM3 (10Gig™ 50/125µm) 12-fiber ribbon cable – aqua. OD: 5mm x 2.5mm	Multimode female MTP* – electric ivory with black boots.
<b>F512D5-5M^Y</b>	Multimode plenum rated OM2 (50/125µm) 12-fiber ribbon cable – orange. OD: 5mm x 2.5mm	Multimode female MTP* – electric ivory with black boots.
<b>F612D5-5M^Y</b>	Multimode plenum rated OM1 (62.5/125µm) 12-fiber ribbon cable – orange. OD: 5mm x 2.5mm	Multimode female MTP* – electric ivory with black boots.
<b>F912D5-5M^Y</b>	Singlemode plenum rated OS1 (9/125µm) 12-fiber ribbon cable – yellow. OD: 5mm x 2.5mm	Singlemode female MTP* – green with black boots.

**QUICKNET™ Pre-Terminated  
MTP\* Cassettes**



**FC^–24-10Y**

**FC^–12-3Y**

**OPTICOM® QUICKNET™  
Rack Mount Fiber Cassette Enclosure**



**FCE1U**

**OPTI-CORE®  
Fiber Optic Patch Cords (OFNR)**



**F^E10-10M^Y**

^Substitute for fiber type: X (OM3 – 10Gig™ 50/125µm), 5 (OM2 – 50/125µm), 6 (OM1 – 62.5/125µm) and 9 (OS1 – 9/125µm). For plenum (OFNP) rated cable, place a P after the fiber type (^) and drop the Y.

‡Substitute for length in meters: 1 – 10, or 15 – 30 in increments of 5 meters. Contact Customer Service for other available lengths.

\*MTP is a registered trademark of US Conec Ltd.

## WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA  
Markham, Ontario  
cs-cdn@panduit.com  
Phone: 800.777.3300

PANDUIT EUROPE LTD.  
London, UK  
cs-emea@panduit.com  
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.  
Republic of Singapore  
cs-ap@panduit.com  
Phone: 65.6305.7575

PANDUIT JAPAN  
Tokyo, Japan  
cs-japan@panduit.com  
Phone: 81.3.3767.7011

PANDUIT LATIN AMERICA  
Jalisco, Mexico  
cs-la@panduit.com  
Phone: 52.333.777.6000

PANDUIT AUSTRALIA PTY. LTD.  
Victoria, Australia  
cs-aus@panduit.com  
Phone: 61.3.9794.9020

For a copy of PANDUIT product warranties, log on to [www.panduit.com/warranty](http://www.panduit.com/warranty)



**For more information**  
**Visit us at [www.panduit.com](http://www.panduit.com)**  
Contact Customer Service by email: [cs@panduit.com](mailto:cs@panduit.com)  
or by phone: 800-777-3300 and reference FBSP23

©2007 PANDUIT Corp.  
ALL RIGHTS RESERVED.  
Printed in the U.S.A.  
**WW-FBSP23**  
9/2007

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[F612D5-5M30Y](#) [F612D5-5M20Y](#) [F912D5-5M5Y](#) [F612D5-5M15Y](#) [F612D5-5M25Y](#) [F912D5-5M15Y](#) [F912D5-5M30Y](#)  
[F612D5-5M10Y](#) [F612D5-5M5Y](#)