

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



Contact insert, number of positions: 8+PE, size: COM, power contacts: 8, control contacts: 0, number of connections per position: 1, Socket, Crimp connection, 320 V, 16 A, 0.5 mm² ... 4 mm², application: Power

### **Product Description**

Contact insert, incl. 4 mounting screws



## **Key Commercial Data**

Packing unit	1 pc
GTIN	4 055626 799490
GTIN	4055626799490

### Technical data

#### General

Note	Connectors may be operated only when there is no load/voltage.
Connection method	Crimp connection
Number of connections per position	1
Degree of pollution	3
Overvoltage category	III
Number of positions	8+PE
No. of power contacts	8
No. of control contacts	0
Insertion/withdrawal cycles	≥ 500
Size	СОМ
Contact numbering	1 - 8
Conductor cross section	0.5 mm² 4 mm²
Connection cross section AWG	20 12
Stripping length of the individual wire	7.5 mm (1.5 mm² 2.5 mm² control circuit)
Assembly instructions	To ensure correct use, installation in housing with IP54 protection or better is required



## Technical data


## Ambient conditions

Ambient temperature (operation)	-40 °C 125 °C (including heating up of contacts)
Material data	
Contact material	Copper alloy
Contact surface material	Ag (alternatively Au)
Contact carrier material	PC
Electrical characteristics	
Rated voltage for power contacts	500
Rated voltage (III/3)	320 V
Rated voltage (III/2)	500 V
Rated surge voltage	6 kV
Rated current	16 A
Standards and Regulations	
Flammability rating according to UL 94	V0
Environmental Product Compliance	
China RoHS	Environmentally Friendly Use Period = 50 years
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

## Drawings




Schematic diagram

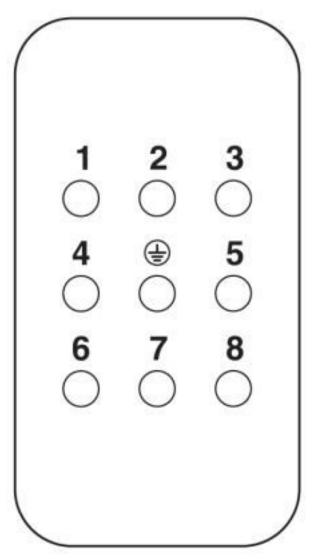


Connector pin assignment, connection side




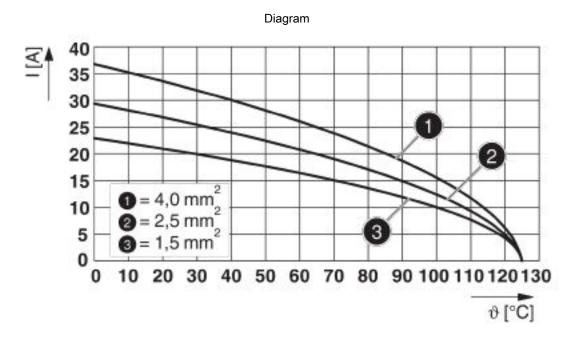

#### Derating diagram

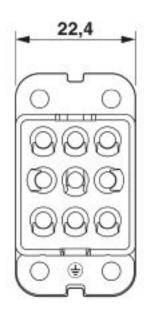

#### Dimensional drawing

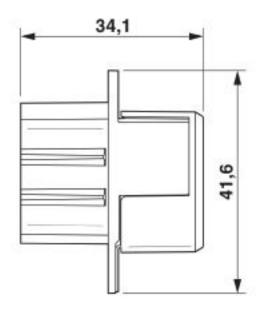

Dimensional drawing

## Classifications

## eCl@ss

eCl@ss 10.0.1	27440205
eCl@ss 8.0	27440205



### Classifications

eCl@ss

	eCl@ss 9.0	27440205
--	------------	----------

**ETIM** 

ETIM 5.0	EC000438
ETIM 6.0	EC000438
ETIM 7.0	EC000438

## Approvals

Approvals

Approvals

EAC

Ex Approvals

### Approval details

EAC [H[

RU C-DE.BL08.B.00511

## Accessories

Accessories

Coding element

Coding profile - CP-HC-S - 1410916



Coding profile, 4 elements per star, for insertion in a coding keyway, for contact inserts HC-BB... / HC-A10-I-UT... / HC-A16-I-UT...

## Crimp contact

Crimp contact - CK2,5-ED-0,50BU AG - 1663640



Turned 2.5 crimp contact, individual female contact, core diameter 0.5 mm², silver-plated



### Accessories

Crimp contact - CK2,5-ED-0,75BU AG - 1663653



Turned 2.5 crimp contact, individual female contact, core diameter 0.75 mm², silver-plated

Crimp contact - CK2,5-ED-1,00BU AG - 1663666



Turned 2.5 crimp contact, individual female contact, core diameter 0.75 to 1.00 mm², silver-plated

Crimp contact - CK2,5-ED-1,50BU AG - 1663679



Turned 2.5 crimp contact, individual female contact, core diameter 1.5 mm², silver-plated

Crimp contact - CK2,5-ED-2,50BU AG - 1663682



Turned 2.5 crimp contact, individual female contact, core diameter 2.5 mm², silver-plated

Crimp contact - CK2,5-ED-3,00BU AG - 1663695



Turned 2.5 crimp contact, individual female contact, core diameter 3.00 mm², silver-plated



### Accessories

Crimp contact - CK2,5-ED-4,00BU AG - 1663705



Turned 2.5 crimp contact, individual female contact, core diameter 4.00 mm², silver-plated

Crimp contact - CK2,5-ED-0,50BU AU - 1674859



Turned 2.5 crimp contact, individual female contact, core diameter 0.5 mm², gold-plated

Crimp contact - CK2,5-ED-1,00BU AU - 1674833



Turned 2.5 crimp contact, individual female contact, core diameter 0.75 to 1.0 mm², gold-plated

Crimp contact - CK2,5-ED-1,50BU AU - 1674820



Turned 2.5 crimp contact, individual female contact, core diameter 1.5 mm², gold-plated

Crimp contact - CK2,5-ED-2,50BU AU - 1674862



Turned 2.5 crimp contact, individual female contact, core diameter 2.5 mm², gold-plated



#### Accessories

Crimp contact - CK2,5-ED-4,00BU AU - 1674846



Turned 2.5 crimp contact, individual female contact, core diameter 4.00 mm², gold-plated

### Crimping tool

Crimping pliers - CRIMPFOX-TC 4 - 1212113



Crimping pliers, for CK 1,6-ED..., CK 2,5-ED..., CK 4,0-ED... turned contacts, 4 marked die stations, unlockable pressure lock, lateral entry, incl. positioning tool

#### Universal tools

Contact removal tool - UNIFOX RT-CK 2.5 - 1072067



Contact removal tool, for turned CK 2,5... contacts

Crimp contact - CK2,5-ED-0,37BU AU - 1585647



Crimp contact, connection method: Crimp connection, connection cross section: AWG 22-26

### Additional products

Contact insert - HC-COM-Q08-I-CT-M - 1079548



Contact insert, number of positions: 8+PE, size: COM, power contacts: 8, control contacts: 0, number of connections per position: 1, Pin, Crimp connection, 320 V, 16 A, 0.5 mm² ... 4 mm², application: Power



Phoenix Contact 2020 © - all rights reserved http://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG Flachsmarktstr. 8 32825 Blomberg Germany Tel. +49 5235 300 Fax +49 5235 3 41200

http://www.phoenixcontact.com

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Phoenix Contact: 1079547