

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



Universal interface module with 1:1 connection between the 40-pos. system connection and the screw

Your advantages

☑ Universal interface module with 40 connection terminal blocks



Key Commercial Data

Packing unit	1 pc
GTIN	4 046356 147057
GTIN	4046356147057

Technical data

Dimensions

Width	112 mm
Height	90 mm
Depth	66 mm

Ambient conditions

Ambient temperature (operation)	-20 °C 65 °C
Ambient temperature (storage/transport)	-20 °C 70 °C
Degree of protection	IP00

General

Nominal voltage U _N	< 25 V AC
	30 V DC
Max. perm. current (per branch)	1 A
Max. permissible current (separate power supply)	4 A
Number of positions	40



Technical data

General

Status display	No
Mounting position	any
Assembly instructions	In rows with zero spacing

Connection data

Connection name	Field level
Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section solid	0.2 mm² 4 mm²
Conductor cross section flexible	0.2 mm² 2.5 mm²
Conductor cross section AWG	24 12

Connection data 2

Connection name	Controller level
Connection method	Yokogawa KS-compatible
Number of connections	1
Number of positions	40
Note	Usable system cables: Phoenix Contact YUC40, Yokogawa KS1
Torque	0.5 Nm

Supported controller

Controller	YOKOGAWA CS3000 CentumVP
- suitable I/O card	AAI543
	AAI141
	AAI143
	AA1835
	AAI841
	AAI135
	AAR181
	AAT141
	AAV141
	AAV142
	AAB841
	AAV542
Controller	YOKOGAWA STARDOM
- suitable I/O card	NFAI141
	NFAI43
	NFAI543
	NFAI135
	NFAP135
	NFAV141



Technical data

Supported controller

NFAV142
NFAV542
NFAB841
NFAI841
NFAI835

Standards and Regulations

Standards/regulations	DIN EN 50178
	IEC 60664
Rated insulation voltage	50 V
Rated surge voltage	0.5 kV (Functional insulation)
Pollution degree	2
Overvoltage category	II

Environmental Product Compliance

REACh SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings




Circuit diagram





Dimensional drawing

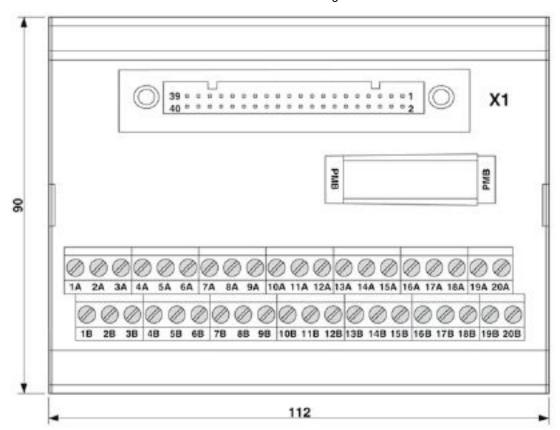

Classifications

eCl@ss

eCl@ss 10.0.1	27141152
eCl@ss 4.0	27250300
eCl@ss 4.1	27250300
eCl@ss 5.0	27250300
eCl@ss 5.1	27250300
eCl@ss 6.0	27242600
eCl@ss 7.0	27141152
eCl@ss 8.0	27141152
eCl@ss 9.0	27141152

ETIM

ETIM 5.0	EC002780
ETIM 6.0	EC002780
ETIM 7.0	EC002780

UNSPSC

_					
ſ	UNSPSC 6.01	30211824			



Classifications

UNSPSC

UNSPSC 7.0901	39121421
UNSPSC 11	39121421
UNSPSC 12.01	39121421
UNSPSC 13.2	39121432
UNSPSC 18.0	39121432
UNSPSC 19.0	39121432
UNSPSC 20.0	39121432
UNSPSC 21.0	39121432

Approvals

Approvals		
Approvals		
EAC		
Ex Approvals		

Approval details

EAC EHL	RU C- DE.A*30.B.01742
---------	--------------------------

Accessories

Accessories

Front adapter

Front adapters - FLK 40-PA/EZ-DR/KS/ 100/YUC - 2322786



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 1.0 m



Accessories

Front adapters - FLK 40-PA/EZ-DR/KS/ 200/YUC - 2314341



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 2.0 m

Front adapters - FLK 40-PA/EZ-DR/KS/ 300/YUC - 2314354



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 3.0 m

Front adapters - FLK 40-PA/EZ-DR/KS/ 400/YUC - 2314367



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 4.0 m

Front adapters - FLK 40-PA/EZ-DR/KS/ 500/YUC - 2321570



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 5.0 m

Front adapters - FLK 40-PA/EZ-DR/KS/ 600/YUC - 2314943



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 6.0 m



Accessories

Front adapters - FLK 40-PA/EZ-DR/KS/ 700/YUC - 2321583



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 7.0 m

Front adapters - FLK 40-PA/EZ-DR/KS/ 800/YUC - 2314956



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 8.0 m

Front adapters - FLK 40-PA/EZ-DR/KS/ 900/YUC - 2321415



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 9.0 m

Front adapters - FLK 40-PA/EZ-DR/KS/1000/YUC - 2314370



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 10.0 m

Front adapters - FLK 40-PA/EZ-DR/KS/1100/YUC - 2321428



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 11.0 m



Accessories

Front adapters - FLK 40-PA/EZ-DR/KS/1200/YUC - 2321431



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 12.0 m

Front adapters - FLK 40-PA/EZ-DR/KS/1300/YUC - 2321444



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 13.0 m

Front adapters - FLK 40-PA/EZ-DR/KS/1400/YUC - 2321457



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 14.0 m

Front adapters - FLK 40-PA/EZ-DR/KS/1500/YUC - 2314383



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 15.0 m

Front adapters - FLK 40-PA/EZ-DR/KS/1600/YUC - 2321596



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 16.0 m



Accessories

Front adapters - FLK 40-PA/EZ-DR/KS/1700/YUC - 2321606



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 17.0 m

Front adapters - FLK 40-PA/EZ-DR/KS/1800/YUC - 2321619



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 18.0 m

Front adapters - FLK 40-PA/EZ-DR/KS/1900/YUC - 2321622



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 19.0 m

Front adapters - FLK 40-PA/EZ-DR/KS/2000/YUC - 2314532



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 20.0 m

Front adapters - FLK 40-PA/EZ-DR/KS/2500/YUC - 2314545



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 25.0 m



Accessories

Front adapters - FLK 40-PA/EZ-DR/KS/3000/YUC - 2314558



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 30.0 m

Front adapters - FLK 40-PA/EZ-DR/KS/3500/YUC - 2901017



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 35.0 m

Front adapters - FLK 40-PA/EZ-DR/KS/4000/YUC - 2901052



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 40.0 m

Front adapters - FLK 40-PA/EZ-DR/KS/4500/YUC - 2902912



Cast front adapter with attached round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 45.0 m

Front adapters - FLK 40-PA/EZ-DR/HF/KS/ 100/YUC - 2904747



Cast front adapter with attached, halogen-free round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 1.0 m



Accessories

Front adapters - FLK 40-PA/EZ-DR/HF/KS/ 200/YUC - 2904748



Cast front adapter with attached, halogen-free round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 2.0 m

Front adapters - FLK 40-PA/EZ-DR/HF/KS/ 300/YUC - 2904749



Cast front adapter with attached, halogen-free round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 3.0 m

Front adapters - FLK 40-PA/EZ-DR/HF/KS/ 400/YUC - 2904750



Cast front adapter with attached, halogen-free round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 4.0 m

Front adapters - FLK 40-PA/EZ-DR/HF/KS/ 500/YUC - 2904645



Cast front adapter with attached, halogen-free round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 5.0 m

Front adapters - FLK 40-PA/EZ-DR/HF/KS/ 600/YUC - 2904751



Cast front adapter with attached, halogen-free round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 60.0 m



Accessories

Front adapters - FLK 40-PA/EZ-DR/HF/KS/ 700/YUC - 2904752



Cast front adapter with attached, halogen-free round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 7.0 m

Front adapters - FLK 40-PA/EZ-DR/HF/KS/ 800/YUC - 2904753



Cast front adapter with attached, halogen-free round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 8.0 m

Front adapters - FLK 40-PA/EZ-DR/HF/KS/ 900/YUC - 2904754



Cast front adapter with attached, halogen-free round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 9.0 m

Front adapters - FLK 40-PA/EZ-DR/HF/KS/1000/YUC - 2904646



Cast front adapter with attached, halogen-free round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 10.0 m

Front adapters - FLK 40-PA/EZ-DR/HF/KS/1500/YUC - 2904647



Cast front adapter with attached, halogen-free round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 15.0 m



Accessories

Front adapters - FLK 40-PA/EZ-DR/HF/KS/2000/YUC - 2904488



Cast front adapter with attached, halogen-free round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 20.0 m

Front adapters - FLK 40-PA/EZ-DR/HF/KS/2500/YUC - 2904648



Cast front adapter with attached, halogen-free round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 25.0 m

Front adapters - FLK 40-PA/EZ-DR/HF/KS/3000/YUC - 2904649



Cast front adapter with attached, halogen-free round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 30.0 m

Front adapters - FLK 40-PA/EZ-DR/HF/KS/3500/YUC - 2904650



Cast front adapter with attached, halogen-free round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 35.0 m

Front adapters - FLK 40-PA/EZ-DR/HF/KS/4000/YUC - 2904651



Cast front adapter with attached, halogen-free round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 40.0 m



Accessories

Front adapters - FLK 40-PA/EZ-DR/HF/KS/4500/YUC - 2904652



Cast front adapter with attached, halogen-free round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 45.0 m

Front adapters - FLK 40-PA/EZ-DR/HF/KS/5000/YUC - 2904653



Cast front adapter with attached, halogen-free round cable and a 40-pos. socket strip injection-molded on both sides for the connection of Yokogawa controllers. Cable length: 50.0 m

Phoenix Contact 2020 @ - all rights reserved http://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG Flachsmarktstr. 8 32825 Blomberg Germany Tel. +49 5235 300 Fax +49 5235 3 41200

http://www.phoenixcontact.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Phoenix Contact: 2314642