

## Distributed I/O device - IBS RL 24 DO 16/8-R-LK - 2734170

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Digital output device for INTERBUS, fiber optic technology with 500 kbaud, 16 readback outputs (24 V DC), actuator connection via 5-pos. M12 female connectors, rugged metal housing, IP67 degree of protection



### Product Description

INTERBUS Ruggedline modules are provided for harsh ambient conditions or in the case of high requirements regarding system diagnostics. To ensure maximum availability, these modules are equipped with a zinc die-cast housing (IP67). Therefore, they can be installed in the direct vicinity of welding tongs.

Each Ruggedline module consists of a mounting plate and an electronics module. The electronics module is snapped onto the mounting plate and fixed with two screws if necessary.

I/O errors can be clearly localized by means of extended diagnostics. Short-circuits of the power supply of the sensors, for example, are reported in groups of 4 inputs. And, in the case of a short-circuit at an output, the respective output is even reported directly. This information will be made available to the controller and displayed at the module.

In the case of modules with fiber optic connection, the diagnostics capability even goes one step further. By using the latest fiber optic technology, the quality of the transmission path is permanently ascertained and optimally adjusted. This information is available to the controller and at the module. Due to these additional features, slow deterioration of the transmission path can be detected before errors occur during transmission or transmission is interrupted.

In the case of Ruggedline modules, the bus medium can be selected. Apart from versions with fiber optic connection (polymer fiber), there are modules which are used with twisted pair cables. The bus medium can be changed from FO installation to a copper medium at any time using the corresponding plug-in adapters.

The bus is connected by means of IP67 plug-in plugs, which transport both the bus signal and the power supply to the modules. For easy preparation, the power supply cable is connected to the plug using the QUICKON fast connection method, and connection of the fiber optic cable is made using a simple cutting and assembly tool; additional polishing is not necessary.


If a fiber optic bus cable is assembled by the user, e.g. the bridge between 2 modules, it must be at least one meter long. For shorter cable bridges, please use only cable bridges from Phoenix Contact.

### Your advantages

- ✓ Rugged metal housing
- ✓ Comprehensive diagnostic functions
- ✓ Rugged Line connector for INTERBUS, either with fiber optic or twisted pair, and supply voltage
- ✓ M12 connector for I/O devices



### Key Commercial Data

|              |  |
|--------------|--|
| Packing unit | 1 pc   |
| GTIN         |  |
| GTIN         | 4017918819194  |

# Distributed I/O device - IBS RL 24 DO 16/8-R-LK - 2734170

## Technical data

### Dimensions

|                    |  |
|--------------------|--|
| Width              | 179 mm                                 |
| Height             | 67 mm                                  |
| Depth              | 71 mm                                  |
| Note on dimensions | With bus connectors and mounting plate |

### Ambient conditions

|  |   |
|--|---|
| Ambient temperature (operation)          | -20 °C ... 55 °C  |
| Ambient temperature (storage/transport)  | -25 °C ... 70 °C  |
| Permissible humidity (operation)         | 100 %   |
| Permissible humidity (storage/transport) | 95 % (non-condensing)   |
| Air pressure (operation)                 | 800 hPa ... 1060 hPa (up to 2000 m above sea level)               |
| Air pressure (storage/transport)         | 700 hPa ... 1060 hPa (up to 3000 m above sea level)               |
| Degree of protection                     | IP65/IP67   |
| Note                                     | Seal unused slots/connections to ensure the degree of protection. |

### General

|                               |   |
|-------------------------------|---|
| Mounting type                 | Wall mounting   |
| Net weight                    | 810 g   |
| Note on weight specifications | without plug or mounting plate                                    |
| Note                          | Seal unused slots/connections to ensure the degree of protection. |

### Interfaces

|                      |   |
|----------------------|---|
| Designation          | INTERBUS                                |
| Connection method    | Optic fiber (polymer fiber 980/1000 µm) |
| Transmission speed   | 500 kbps                                |
| Transmission physics | FO                                      |

### Power supply for module electronics

|                      |  |
|----------------------|--|
| Supply voltage       | 24 V DC  |
| Supply voltage range | 18.5 V DC ... 32 V DC (including ripple)                     |
| Ripple               | Max 3.6 V <sub>SS</sub> within the permissible voltage range |
| Supply current       | typ. 120 mA  |

### Digital outputs

|                                    |   |
|------------------------------------|---|
| Output name                        | Digital outputs   |
| Connection technology              | 2, 3-wire   |
| Number of outputs                  | 16  |
| Protective circuit                 | Electronic short-circuit/overload protection for each channel |
| Output voltage                     | 24 V DC   |
| Nominal output voltage             | 24 V DC   |
| Maximum output current per channel | 500 mA  |
| Maximum output current per module  | 4 A   |
| Nominal load, inductive            | 12 VA (1.2 H, 48 Ω)   |

## Distributed I/O device - IBS RL 24 DO 16/8-R-LK - 2734170

### Technical data

#### Digital outputs

|   |  |
|---|--|
| Nominal load, lamp  | 12 W   |
| Nominal load, ohmic                                       | 12 W   |
| Limitation of the voltage induced on circuit interruption | $\geq -7$ V  |
| Output voltage when switched off                          | max. 500 mV  |
| Output current when switched off                          | 0 mA   |
| Behavior with overload                                    | Auto restart   |
| Behavior with inductive overload                          | Output can be destroyed                                  |
| Reverse voltage resistance to short pulses                | Limited protection against reverse voltages up to 3 A DC |

#### Electrical isolation

|              |   |
|--------------|---|
| Test section | Between bus logic and outputs 500 V AC 50 Hz 1 min. |
|--------------|---|

#### Standards and Regulations


|                                  |     |
|----------------------------------|-----|
| Connection in acc. with standard | CUL |
|----------------------------------|-----|

#### Environmental Product Compliance

|            |   |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

### Drawings

Connection diagram

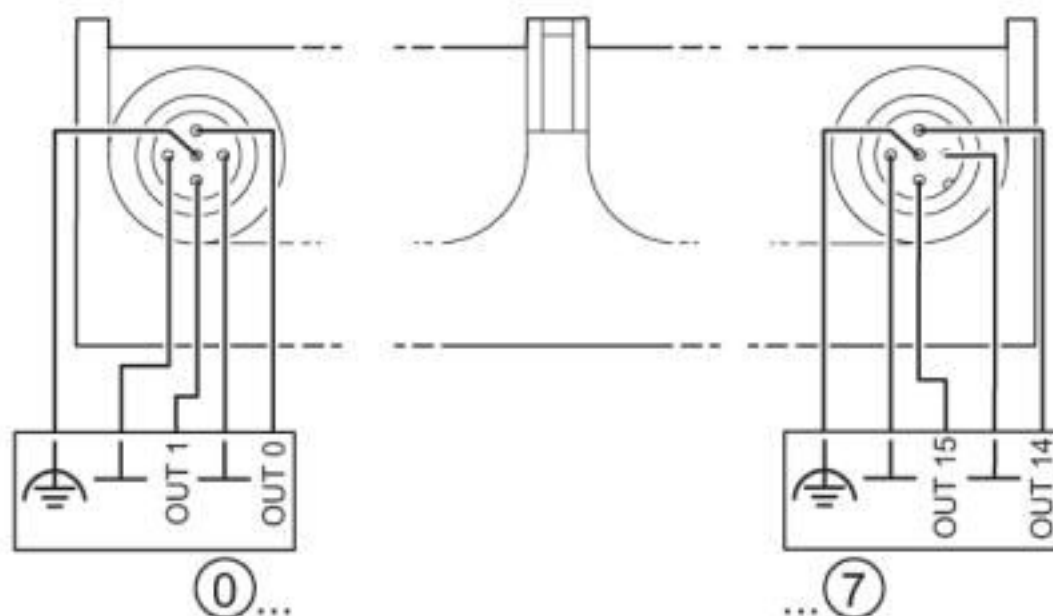

## Distributed I/O device - IBS RL 24 DO 16/8-R-LK - 2734170

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27250300 |
| eCl@ss 4.1 | 27250300 |
| eCl@ss 5.0 | 27250300 |
| eCl@ss 5.1 | 27242600 |
| eCl@ss 6.0 | 27242600 |
| eCl@ss 7.0 | 27242604 |
| eCl@ss 8.0 | 27242604 |
| eCl@ss 9.0 | 27242604 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 2.0 | EC001430 |
| ETIM 3.0 | EC001599 |
| ETIM 4.0 | EC001599 |
| ETIM 5.0 | EC001599 |
| ETIM 6.0 | EC001599 |
| ETIM 7.0 | EC001599 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 43172015 |
| UNSPSC 7.0901 | 43201404 |
| UNSPSC 11     | 43172015 |
| UNSPSC 12.01  | 43201404 |
| UNSPSC 13.2   | 32151602 |
| UNSPSC 19.0   | 32151602 |

### Accessories

#### Accessories

##### Adapter cable

Cable set - IBS RL CABLE POF/ - 2819956

Assembled cable sets with fiber optic bus connectors, sold by the meter



#### Assembly element

## Distributed I/O device - IBS RL 24 DO 16/8-R-LK - 2734170

### Accessories

Lower mounting part - IBS RL AP - 2731128



Mounting plate for Ruggedline devices

---

### Assembly tool

Fiber cutter - IBS RL FOC - 2725147



Fiber cutter for assembling polymer fiber cables for connecting INTERBUS Ruggedline devices

---

### Bridge

Cable set - IBS RL CONNECTION-LK - 2733029



Assembled cable jumper as a short connection between two INTERBUS Rugged Line devices with fiber optic bus connectors and power supply, approximately 30 cm

---

### Cable by the meter

Cable - IBS PWR/5HD/F - 2731775



Power supply cable, gray, welding-splash-resistant in standard applications, 5 x 1.5 mm<sup>2</sup>, highly flexible, sold by the meter

---

Cable - IBS PWR/5 - 2820000



Power supply cable, gray, welding-splash-resistant in standard applications, 5 x 1.5 mm<sup>2</sup>, sold by the meter

---

### Circular connector (cable-side)

## Distributed I/O device - IBS RL 24 DO 16/8-R-LK - 2734170

### Accessories

Connector - SACC-M12MS-4QO-0,75 - 1641769



Connector, Universal, 4-position, Plug straight M12, Coding: A, Insulation displacement connection, knurl material: Plastic, external cable diameter 4 mm ... 8 mm

---

### Connector set

Connector set - IBS CCO-R/L - 2759883



M23 solder connection for bus connector set, male/female connector, 9-pos. (8+1)

---

### Data cable by the meter

FO cable - PSM-LWL-RUGGED-980/1000 - 2744322



Polymer fiber cable, duplex 980µm/1000µm, heavy-weight version for installation in stationary systems and machines, by the meter without male connector

---

FO cable - PSM-LWL-RUGGED-FLEX-980/1000 - 2744335



Polymer fiber cable, duplex 980/1000 µm, heavy-weight, highly flexible version for flexible conduit applications, by the meter, without connector

---

FO cable - PSM-LWL-KDHEAVY-980/1000 - 2744319



Polymer fiber cable, duplex 980 µm/1000 µm, medium-weight version for installation in stationary systems and machines, by the meter without male connector

---

### Data plug

## Distributed I/O device - IBS RL 24 DO 16/8-R-LK - 2734170

### Accessories

Measuring instrument - PSM-FO-POWERMETER - 2799539



Fiber optic measuring case, consisting of an optical power meter, F-SMA, B-FOC adapters, reference fibers and operating instructions

---

Assembly tool - PSM-POF-KONFTOOL - 2744131



Polymer fiber DIY case, consisting of: Stripping knife, stripping pliers, polishing wheels for F-SMA and SC-RJ quick mounting connectors, polishing pad and emery paper

---

### Labeling panel

Marking label - IBS RL MARKER-SET - 2732729



Set of 50 small and 50 large metal marking labels

---

Marking label - IBS RL MARKER-G-SET - 2734727



100 large metal marking labels

---

Marking label - IBS RL MARKER-K-SET - 2734730



100 small metal marking labels

---

### Media converter

## Distributed I/O device - IBS RL 24 DO 16/8-R-LK - 2734170

### Accessories

FO converters - IBS OPTOSUB-MA/M/R-LK-OPC - 2732635



INTERBUS fiber optic converter for converting the remote OUT interface to fiber optics, correction of the optical transmission capacity, FO output right

---

### Plug

Bus connector - IBS RL PLUG-LK/POF - 2731076



Connector for the fiber optic bus with polymer fiber cable and for the power supply with QUICKON connection method

---

Adapter set - IBS RL 24 ADAP-LK/T - 2725040



INTERBUS Rugged Line adapter for converting the fiber optic remote bus to a copper wire remote bus

---

Adapter set - IBS RL 24 ADAP-T/LK - 2725037



INTERBUS Rugged Line adapter for converting the copper wire remote bus to a fiber optic remote bus

---

Bus connector - IBS RL PLUG-LK/POF-F - 2734183



Connector for the fiber optic bus with polymer fiber cable and for the power supply with spring-cage connection method



## Distributed I/O device - IBS RL 24 DO 16/8-R-LK - 2734170

### Accessories

Connector set - IBS CCO-PSF/L - 2780878



M23 power supply connector, female connector, 6-pos.

Connector set - IBS CCO-PSM/L - 2759906



M23 power supply connector, male connector, 6-pos.

### Protective cap

Transport protection - IBS RL PROT-LK - 2819969



Transport protection for optic fiber bus connection

### Y-distributor

Y distributor - SAC-3P-M12Y/2XM12FS PE - 1683455



Y distributor, 4-position, unshielded, Plug straight M12, coding: A, on Socket straight M12, coding: A and Socket straight M12, coding: A

User manual - IBS RL SYS PRO UM - 2743705



User manual, German, for configuring and installing the Rugged Line product range, only available as a download.

Phoenix Contact 2020 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Phoenix Contact:

2734170