





May 2021

- Pletronics' PE77D Series is a quartz crystal controlled precision square wave generator with a PECL output.
- The package is designed for high density surface mount designs.
- Low cost mass produced oscillator.
- · Tape and Reel or cut tape packaging is available.
- 5 x 7 mm LCC Ceramic Package
- · Enable/Disable Function on pad 1
- Disable function includes low standby power mode
- 3<sup>rd</sup> Overtone Crystals used
- Improved circuit to minimize oscillator issues such as multi-mode output signal.
- · Low Jitter

## Pletronics Inc. certifies this device is in accordance with the RoHS 3 and WEEE 2 directives.

Pletronics Inc. guarantees the device does not contain the following: Cadmium, Hexavalent Chromium, Lead, Mercury, PBB's, PBDE's

Weight of the Device: 0.16 grams

Moisture Sensitivity Level: 1 As defined in J-STD-020D.1

Second Level Interconnect code: e4



#### **Absolute Maximum Ratings:**

Parameter	Unit
V <sub>CC</sub> Supply Voltage	-0.5V to +7.0V
Vi Input Voltage	-0.5V to V <sub>CC</sub> + 0.5V
Vo Output Voltage	-0.5V to V <sub>CC</sub> + 0.5V

#### **Thermal Characteristics**

The maximum die or junction temperature is 155°C

The thermal resistance junction to board is 30 to  $50^{\circ}$ C/Watt depending on the solder pads, ground plane and construction of the PCB.



May 2021

ı	Part Number:										
	PE77	45	D	E	٧	-125.0M	-XX		Part Marking:		
								Packaging code or blank T250 = 250 per Tape and Reel T500 = 500 per Tape and Reel T1K = 1000 per Tape and Reel	PLE PE77 FF.FFF M • YMDXX		
								Frequency in MHz	PE7XYWWXX		
								Supply Voltage V <sub>cc</sub> V = 3.3V <u>+</u> 10%	FF.FFF M • PLE XXX		
								Optional Enhanced OTR  Blank = Temp. range -10 to +70°C  C = Temp. range -20 to +70°C  E = Temp. range -40 to +85°C			
								Series Model			
								Frequency Stability 45 = ± 50 ppm 44 = ± 25 ppm 20 = ± 20 ppm			
								Series Model			

#### Marking Legend:

PLE = Pletronics

FF.FFF M = Frequency in MHz

YYWW or YWW or YMD = Date of Manufacture (year and week, or year-month-day)

All other marking is internal factory codes

Specifications such as frequency stability, supply voltage and operating temperature range, etc. are not identified from the marking. External packaging labels and packing list will correctly identify the ordered Pletronics part number.

#### **Codes for Date Code YMD**

Code	0	1	2	3	4	Cod	e A	В	C	D	E	F	G	Н	J	K	L	М
Year	2020	2021	2022	2023	2024	Mon	t <b>h</b> JAN	FEB	MAF	R APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC
(	Code		1	2	3	4	5	6	7	8	9	Α	В	С	D	Ε	F	G
	Day		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
(	Code		Н	J	K	٦	M	N	Р	R	Т	U	٧	W	Х	Υ	Z	
	Day		17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	



May 2021

## Electrical Specification for 3.30V ±10% over the specified temperature range and the frequency range of 40 to 325 MHz

Item	Min	Max	Unit	Condition
Frequency Accuracy "45"	-50	+50	ppm	For all supply voltages, load changes, aging for 1
"44"	-25	+25		year, shock, vibration and temperatures
<b>"20"</b>	-20	+20		
Output Waveform		PECL /E	CL	
Output High Level (0°C to 85°C)	2.275	2.420	volts	Referenced to Ground, V <sub>cc</sub> = 3.3 V
	0.975	1.120	volts	Referenced to termination voltage, V <sub>cc</sub> = 3.3 V
	-1.025	-0.880	volts	Referenced to Vcc, V <sub>cc</sub> = 3.3 V
Output High Level (-40°C)	2.216	2.420	volts	Referenced to Ground, V <sub>cc</sub> = 3.3 V
	0.916	1.120	volts	Referenced to termination voltage, V <sub>cc</sub> = 3.3 V
	-1.084	-0.88	volts	Referenced to Vcc, V <sub>cc</sub> = 3.3 V
Output Low Level (0°C to 85°C)	1.490	1.680	volts	Referenced to Ground, V <sub>cc</sub> = 3.3 V
	0.190	0.380	volts	Referenced to termination voltage, V <sub>cc</sub> = 3.3 V
	-1.810	-1.620	volts	Referenced to Vcc, V <sub>cc</sub> = 3.3 V
Output Low Level (-40°C)	1.470	1.745	volts	Referenced to Ground, V <sub>cc</sub> = 3.3 V
	0.170	0.445	volts	Referenced to termination voltage, V <sub>cc</sub> = 3.3 V
	-1.830	-1.555	volts	Referenced to Vcc, V <sub>cc</sub> = 3.3 V
Output Symmetry	45	55	%	at 50% point of V <sub>cc</sub> (See load circuit)
Jitter <sup>1</sup>	-	0.6	pS RMS	12 KHz to 20 MHz from the output frequency
	-	2.8	pS RMS	10 Hz to 1 MHz from the output frequency
Output $T_{\text{RISE}}$ and $T_{\text{FALL}}$	-	0.7	nS	Vth is 20% and 80% of waveform
V <sub>cc</sub> Supply Current (I <sub>cc</sub> )	-	90	mA	
Enable/Disable Internal Pull-up	50	-	Kohm	to $V_{cc}$ , measured with Pad 1 = 0.0 volts
V disable	-	0.6	volts	Referenced to pad 3
V enable	2.40	•	volts	Referenced to pad 3
Output leakage $V_{OUT} = V_{CC}$	-10	+10	uA	Pad 1 low, device disabled
$V_{OUT} = 0V$	-10	+10	uA	
Enable time	100	500	nS	Time for output to reach a logic state, the output frequency is correct at the specified Start Time.
Disable time	-	200	nS	Time for output to reach a high Z state
Start up time	-	10	mS	Time for output to reach specified frequency
Operating Temperature Range	-10	+70	°C	Standard Temperature Range
	- 20	+70	°C	Extended Temperature Range "C" Option
	- 40	+85	°C	Extended Temperature Range "E" Option
Storage Temperature Range	-55	+125	°C	
Standby Current I <sub>cc</sub>	-	30	uA	Pad 1 low, device disabled


<sup>&</sup>lt;sup>1</sup> Jitter computed from phase noise data at 125MHz

Specifications with Pad 1 E/D open circuit unless stated otherwise




May 2021


#### **Typical Phase-Noise Response**



#### **Load Circuit**

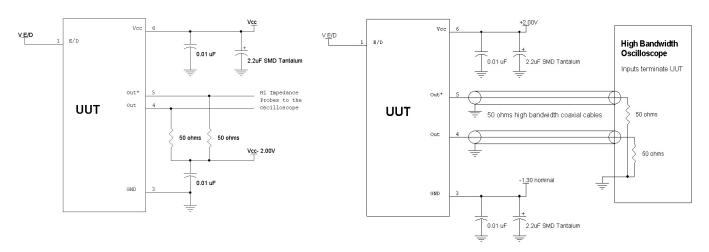

#### **Test Waveform**





May 2021

#### Reliability: Environmental Compliance

Parameter	Condition
Mechanical Shock	MIL-STD-883 Method 2002, Condition B
Vibration	MIL-STD-883 Method 2007, Condition A
Solderability	MIL-STD-883 Method 2003
Thermal Shock	MIL-STD-883 Method 1011, Condition A

#### **ESD Rating**

Model	Minimum Voltage	Conditions		
Human Body Model	1500	MIL-STD-883 Method 3115		
Charged Device Model	1000	JESD 22-C101		

#### **Package Labeling**

Label is 1" x 2.6" (25.4mm x 66.7mm) Font is Courier New Bar code is 39-Full ASCII

PE7745DEV-125.0M
Customer P/N:

12345678

D/C MSL: 1

Label is 1" x 2.6" (25.4mm x 66.7mm) Font is Arial

**RoHS Compliant** 

2nd LvL Interconnect

Category=e4

Max Safe Temp=260C for 10s 2X Max




Inches

May 2021

mm

#### Mechanical:

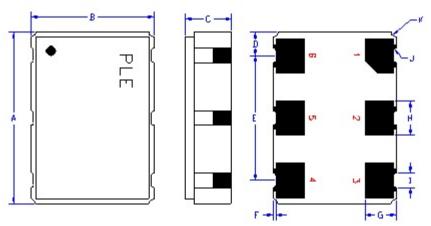

0.276 +0.006 7.00 +0.15 В 0.197 ±0.006 5.00 +0.15 С 0.067 max 1.70 max  $D^1$ 0.038 0.96  $E^1$ 0.200 5.08 0.004 0.10  $G^1$ 0.050 1.27  $H^1$ 0.055 1.40 I<sup>1</sup> 0.024 0.60  $J^1$ 0.004R 0.10R  $K^1$ 0.008R 0.20R

Not to Scale

Note: C dimension is 1.5 mm typical

#### Contacts (pads):

Gold 11.8 to 32.7 μinches (0.3 to 0.83 μm) over Nickel 50 to 350 μinches (1.27 to 8.89 μm)

Pad	Function	Note
1	Output Enable/Disable	When this pad is not connected the oscillator shall operate. When this pad is <0.30 volts, the output will be inhibited (high impedance state.) Recommend connecting this pad to $V_{\rm cc}$ if the oscillator is to be always on.
2	No connect	There is no internal connection to this pad
3	Ground (GND)	
4	Output	Both outputs must be terminated and biased for proper operation. The ideal
5	Output*	termination is 50 ohms connected to 2.0V below the Supply Voltage.
6	Supply Voltage (V <sub>cc</sub> )	Recommend connecting appropriate power supply bypass capacitors as close as possible.

<sup>1</sup> Typical dimensions

#### Layout and application information



Recommend connecting Pad 1 and Pad 2 together to permit the design to accept Enable/Disable input on either pad

For Optimum Jitter Performance, Pletronics recommends:


- · a ground plane under the device
- no large transient signals (both current and voltage) should be routed under the device
- do not layout near a large magnetic field such as a high frequency switching power supply
- do not place near piezoelectric buzzers or mechanical fans.

www.pletronics.com 425-776-1880 6



May 2021

#### Reflow Cycle (typical for lead free processing)

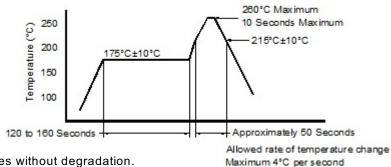

The part may be reflowed 3 times without degradation.


#### Tape and Reel: available for quantities of 250 to 1000 per reel, cut tape for < 250

Constant Dimensions Table 1										
Tape Size	D0	D1 Min	E1	P0	P2	S1 Min	T Max	T1 Max		
8mm		1.0			2.0					
12mm	1.5	1.5	1.75	4.0	<u>+</u> 0.05					
16mm	+0.1 -0.0	1.5	<u>+</u> 0.1	<u>+</u> 0.1	2.0	0.6	0.6	0.1		
24mm		1.5			<u>+</u> 0.1					

Variable Dimensions Table 2									
Tape Size	B1 Max	E2 Min	F	P1	T2 Max	W Max	Ao, Bo & Ko		
16 mm	12.1	14.25	7.5 <u>+</u> 0.1	8.0 <u>+</u> 0.1	8.0	16.3	Note 1		

Note 1: Embossed cavity to conform to EIA-481-B

Dimensions in mm Not to scale



REEL DIMENSIONS

10.0

254.0

4.00

101.6

13.0 +0.5 / -0.2

13.0

330.2

3.75

95.3

16.0

inches


inches

7.0

177.8

2.50

63.5

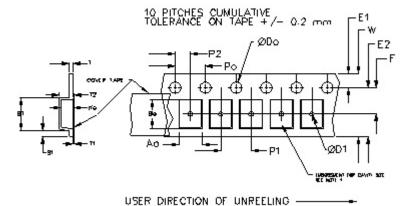

		-0.0	-0.0	-0.0	
_			_		
Re	el dimen	sions ma	ay vary fr	om the a	bove

www.pletronics.com 425-776-1880



May 2021

#### **IMPORTANT NOTICE**

Pletronics Incorporated (PLE) reserves the right to make corrections, improvements, modifications and other changes to this product at anytime. PLE reserves the right to discontinue any product or service without notice. Customers are responsible for obtaining the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to PLE's terms and conditions of sale supplied at the time of order acknowledgment.

PLE warrants performance of this product to the specifications applicable at the time of sale in accordance with PLE's limited warranty. Testing and other quality control techniques are used to the extent PLE deems necessary to support this warranty. Except where mandated by specific contractual documents, testing of all parameters of each product is not necessarily performed.

PLE assumes no liability for application assistance or customer product design. Customers are responsible for their products and applications using PLE components. To minimize the risks associated with the customer products and applications, customers should provide adequate design and operating safeguards.

PLE products are not designed, intended, authorized or warranted to be suitable for use in life support applications, weapons, weapon systems or space applications, devices or systems or other critical applications that may involve potential risks of death, personal injury or severe property or environmental damage. Inclusion of PLE products in such applications is understood to be fully at the risk of the customer. Use of PLE products in such applications requires the written approval of an appropriate PLE officer. Questions concerning potential risk applications should be directed to PLE.

PLE does not warrant or represent that any license, either express or implied, is granted under any PLE patent right, copyright, artwork or other intellectual property right relating to any combination, machine or process which PLE product or services are used. Information published by PLE regarding third-party products or services does not constitute a license from PLE to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from PLE under the patents or other intellectual property of PLE.

Reproduction of information in PLE data sheets or web site is permissible only if the reproduction is without alteration and is accompanied by associated warranties, conditions, limitations and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. PLE is not responsible or liable for such altered documents.

Resale of PLE products or services with statements different from or beyond the parameters stated by PLE for that product or service voids all express and implied warranties for the associated PLE product or service and is an unfair or deceptive business practice. PLE is not responsible for any such statements.

#### **Contacting Pletronics Inc.**

Pletronics Inc. Tel: 425-776-1880 19013 36<sup>th</sup> Ave. West Fax: 425-776-2760

Lynnwood, WA 98036-5761 USA E-mail: ple-sales@pletronics.com

URL: www.pletronics.com

Copyright © 2021 Pletronics Inc.

www.pletronics.com 425-776-1880 8



May 2021

#### PLETRONICS INC. DOCUMENT CONTROL

This is the document control page. This is not printed or part of the PDF that can be downloaded on the web site. This is to keep the history of the datasheet document and all revisions.

Part Number Family: PE77D

Document File Name: PE77D 3.3V.wpd PDF File Name: PE77D 3.3V.pdf

Written By: R Gubser

Approved By: Melody Mistlin and Claude Lee after sales and engineering group review.

This specification was written around the NPC IC CF5036 and data taken at PLE about its performance.

**Revision History:** 

March 11, 2005 Initial Release with freq high 225 March 15, 2005 Changed freq high to 212.5

May 26, 2005

Deleted F symmetry, added Vcc marking of B & V, chg high to 250 MHz

Deleted dual voltage marking explanation and code W, added IC code

July 5, 2005

Deleted F symmetry, added Vcc marking of B & V, chg high to 250 MHz

Deleted F symmetry, added Vcc marking of B & V, chg high to 250 MHz

Deleted F symmetry, added Vcc marking of B & V, chg high to 250 MHz

Deleted F symmetry, added Vcc marking of B & V, chg high to 250 MHz

Deleted F symmetry, added Vcc marking of B & V, chg high to 250 MHz

Deleted F symmetry, added Vcc marking of B & V, chg high to 250 MHz

Deleted Gual Voltage marking explanation and code W, added IC code

Improved how the Vhi and Vlo were listed. Add -40C changes (RAG)

Updated marking page, RoHS label & mech shock & jitter to .6 from .13

Oct 2006 Added T250, etc. Changed height from 1.87 to 1.70 max

Dec 2006 Deleted tube package & frequency range

April 2007 Changed std OTR to -10 from 0 on part number and table

Feb 2010 Chg'd Contact Gold thickness & update YMD to 2014

April 26, 2010 Added "C" temperature range, Added 3 reflow Rag

May 5, 2010 Added specification of the Pad 1 voltage when the E/D pull up resistor is

defined

Modified the Standby Icc to match the NPC datasheet, changed 3uA to

30uA

Added a min/max specification to the Enable time and text in the condition to state the frequency is not valid until the Start Up time is

reached rag

June 21, 2011 Added footnote about how the jitter was determined rag

Aug 24, 2011 Added note for typical C dimension

February 3, 2016 Updated company logo, RoHS information and date code range.

November 5, 2018 Updated logos, notice page and date code range

May 6, 2021 Updated logos, date code range, RoHS information and barcode

www.pletronics.com 425-776-1880 9

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pletronics:

PE7744DV109.978MT250