




PHR-1236 12V 8.5 AH @ 20-hr. 36 W/Cell @ 15-min.

Rechargeable Sealed Lead Acid Battery
PHR – High-Rate Series


TERMINALS: (mm)

F2: Quick disconnect tabs,
0.250" x 0.032" – Mate with
AMP. INC FASTON "250" series





Torque – Not Applicable

DIMENSIONS: inch (mm)

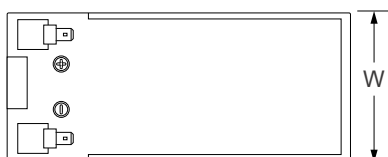

L: 5.95 (151)
W: 2.56 (65)
H: 3.68 (93.5)
HT: 3.90 (99)

Tolerances are +/- 0.04 in.
(+/- 1mm) and +/- 0.08 in.
(+/- 2mm) for height
dimensions. All data subject
to change without notice.

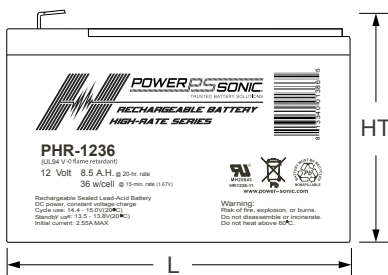

CORPORATE HEADQUARTERS (USA AND INTERNATIONAL EXCLUDING EMEA)

Power-Sonic Corporation
7550 Panasonic Way, San Diego,
California 92154
T: +1 (619) 661 2020
F: +1 (619) 661 3650
E: customer-service@power-sonic.com

POWER-SONIC EUROPE LIMITED (EMEA – EUROPE, MIDDLE EAST AND AFRICA)

3 Buckingham Square,
Hurricane Way, Wickford,
Essex SS11 8YQ
T: +44 (0)1268 560686
F: +44 (0)1268 560902
E: salesEMEA@power-sonic.com

FEATURES

- Superb high-rate discharge characteristics that ensure reliable performance in UPS applications for up to 10 years
- Specifically designed for UPS and critical power backup applications
- Valve regulated, maintenance free spill proof construction
- Precision plate pasting for higher consistency with 100% load testing to ensure uniform capacity
- Patented dual-paste process for enhanced active material bonding and computer guided volumetric electrolyte control for precision filling
- Rugged vibration and impact resistant ABS case and cover flame retardant to UL94-V0

APPROVALS

- Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified
- U.L recognized
- ISO9001:2015 – Quality management systems

PERFORMANCE SPECIFICATIONS

Nominal Voltage	12 volts (6 cells)
Nominal Power (15 min.)	36 W/Cell
Rated Capacity	
20-hr. (420mA to 10.80 volts)	8.5 AH
10-hr. (800mA to 10.50 volts)	8.0 AH
8-hr. (980mA to 10.50 volts)	7.8 AH
Approximate Weight	5.30 lbs. (2.40 kg)
Internal Resistance (approx.)	13.0 milliohms
Max Discharge Current (5 Sec.)	105 amperes
Shelf Life (% of nominal capacity at 68°F (20°C))	
1 Month	97%
3 Month	91%
6 Month	83%
Operating Temperature Range	
Charge	5°F (-15°C) to 122°F (50°C)
Discharge	-4°F (-20°C) to 140°F (60°C)
Case and Cover	Flame Retardant ABS Plastic UL94-V-0
Power Sonic Chargers	PSC-122000-PC

PHR-1236 12V 8.5 AH @ 20-hr. 36 W/Cell @ 15-min.

Rechargeable Sealed Lead Acid Battery
PHR – High-Rate Series

CONSTANT CURRENT DISCHARGE (AMPERES) AT 25°C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	23.5	18.0	14.6	12.2	8.9	6.3	4.9	2.7	1.9	1.6	1.3	1.1	0.9	0.7	0.4
1.80V/cell	25.9	19.9	16.0	13.4	9.6	6.8	5.3	2.9	2.1	1.7	1.4	1.2	1.0	0.8	0.4
1.75V/cell	30.8	22.5	18.1	14.5	10.2	7.1	5.5	3.1	2.2	1.7	1.4	1.2	1.0	0.8	0.4
1.70V/cell	32.6	23.4	18.8	14.9	10.5	7.3	5.7	3.1	2.2	1.8	1.5	1.3	1.0	0.8	0.4
1.65V/cell	35.0	24.5	19.5	15.4	10.9	7.6	5.9	3.2	2.3	1.8	1.5	1.3	1.0	0.8	0.4
1.60V/cell	36.7	25.4	20.0	15.8	11.1	7.8	6.0	3.3	2.3	1.8	1.5	1.3	1.0	0.8	0.4

CONSTANT POWER DISCHARGE (WATTS/CELL) AT 25°C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	44.4	34.4	28.1	23.9	17.5	12.4	9.7	5.5	3.9	3.1	2.6	2.3	1.8	1.5	0.8
1.80V/cell	48.3	37.7	30.6	26.0	18.7	13.4	10.5	5.8	4.2	3.4	2.8	2.5	2.0	1.6	0.9
1.75V/cell	56.6	42.0	34.4	27.8	19.9	14.0	11.0	6.1	4.4	3.5	2.9	2.5	2.0	1.7	0.9
1.70V/cell	59.0	43.2	35.2	28.3	20.3	14.3	11.3	6.2	4.5	3.5	3.0	2.5	2.0	1.7	0.9
1.65V/cell	62.2	44.4	36.0	28.9	20.8	14.8	11.6	6.4	4.5	3.6	3.0	2.6	2.0	1.7	0.9
1.60V/cell	63.8	45.3	36.2	29.3	21.0	14.9	11.7	6.4	4.6	3.6	3.0	2.6	2.0	1.7	0.9

CHARGING

Cycle Applications: Apply constant voltage charge at 2.35v/c - 2.45v/c (14.1 – 14.7v for 12v Monobloc) at 20°C. Initial charging current should be set at less than 0.25C Amps. Switch to float charge to avoid overcharging.

"Float" or "Stand-By" Service: Apply constant voltage charge of 2.25v/c – 2.30v/c (13.5 to 13.8 volts for 12v Monobloc at 20°C. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition.

Temperature Compensation: Charging Voltage for both Cyclic and Standby applications should be regulated in relation to ambient temperature. As temperature rises charging voltage should be reduced to prevent overcharge and increased as temperature falls to avoid undercharge.

For further charging information including temperature compensation factors, see Power Sonic Technical Manual/ Power Sonic Charger specifications.

APPLICATIONS

- High Rate UPS
- Data Centers

CORPORATE HEADQUARTERS (USA AND INTERNATIONAL EXCLUDING EMEA)

Power-Sonic Corporation
7550 Panasonc Way, San Diego,
California 92154
T: +1 (619) 661 2020
F: +1 (619) 661 3650
E: customer-service@power-sonic.com

POWER-SONIC EUROPE LIMITED (EMEA – EUROPE, MIDDLE EAST AND AFRICA)

3 Buckingham Square,
Hurricane Way, Wickford,
Essex SS11 8YQ
T: +44 (0)1268 560686
F: +44 (0)1268 560902
E: salesEMEA@power-sonic.com

CHARGERS

Power Sonic offers a wide range of chargers suitable for batteries with a variety of capacities.

Please refer to our website for more information on our switch mode and transformer type chargers.

Please contact our technical department for advice if you have difficulty in locating a suitable charger.

FURTHER INFORMATION

Please refer to our website www.power-sonic.com for a complete range of useful downloads, such as product catalogs, material safety data sheets (MSDS), ISO certification, etc.



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Power-Sonic:](#)

[PHR-1236 F2 FR](#)