

TRUSTED BATTERY SOLUTIONS
















PSH-655FR 6V 5.5 AH @ 20-hr. 21.1 W/Cell @ 15-min.

Rechargeable Sealed Lead Acid Battery PSH - High-Rate Series

TERMINALS (mm)

F1: Quick disconnect tabs 0.187" x 0.032" – Mate with AMP. INC. FASTON "187" series



Torque - Not Applicable


FEATURES

- Absorbent Glass Mat (AGM) technology for superior performance
- Designed specifically for high-rate discharge applications
- Valve regulated, maintenance free spill proof construction
- Exceptionally high energy density
- Constant power (watts/cell)
- Rugged vibration and impact resistant ABS case and cover flame retardant to UL94-V0

APPROVALS


- Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified
- U.L recognized
- ISO9001:2015 Quality management systems


DIMENSIONS inch (mm)



2.76 (70) W: 1.85 (47) **H:** 3.94 (100) **HT:** 4.17 (106) Tolerances are +/- 0.04 in.

(+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice.





GLOBAL HEADOUARTERS (USA AND INTERNATIONAL EXCLUDING EMEA)

Power-Sonic Corporation 365 Cabela Dr Suite 300,

Reno, Nevada 89523 USA

T: +1 619 661 2020 E: customer-service@power-sonic.com **POWER-SONIC EMEA**

(EMEA - EUROPE, MIDDLE EAST AND AFRICA)

Smitspol 4, 3861 RS Nijkerk, The Netherlands

T NL: + 31 33 7410 700 T UK: +44 1268 560 686 TFR: +33 344 32 18 17

E: salesEMEA@power-sonic.com

PERFORMANCE SPECIFICATIONS

Nominal Voltage	6 volts (3 cells)
Nominal Power (15 min.)	21.1 W/Cell
Rated Capacity 20-hr. (275mA to 5.25 volts) 10-hr. (950mA to 5.10 volts) 5-hr. (540mA to 5.25 volts) 1-hr. (3.7A to 4.50 volts) 15-min. (11.2A to 4.50 volts)	5.50 AH 4.75 AH 5.40 AH 3.70 AH 2.80 AH
Approximate Weight	2.10 lbs. (0.95 kg)
Internal Resistance (approx.)	10.0 milliohms
Max Discharge Current (5 Sec.)	16.5 amperes
Max Short-Duration Discharge Current (10 Sec.)	55.0 amperes
Shelf Life (% of nominal capacity at 68°F (20°C) 1 Month 3 Month 6 Month	97% 91% 83%
Operating Temperature Range Charge Discharge	5°F (-15°C) to 122°F (50°C) -4°F (-20°C) to 140°F (60°C)
Case and Cover	Flame Retardant ABS Plastic UL94:V-0
Power Sonic Chargers	PSC-6500A-C PSC-61000A-C

PSC-61000-PC




PSH-655FR 6V 5.5 AH @ 20-hr. 21.1 W/Cell @ 15-min.


Rechargeable Sealed Lead Acid Battery
PSH – High-Rate Series

CONSTANT POWER DISCHARGE (WATTS/CELL) AT 25°C (77°F) 8.36 6.72 1.70 38.9 27.1 20.6 16.6 11.9 8.52 6.83 PSH-655FR 40.0 27.7 21.1 12.1 8.63 6.92

DISCHARGE CHARACTERISTICS

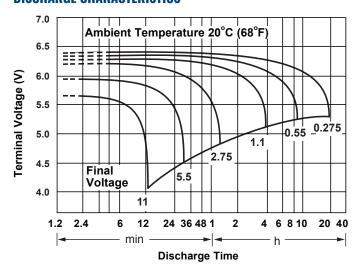

SHELF LIFE & STORAGE

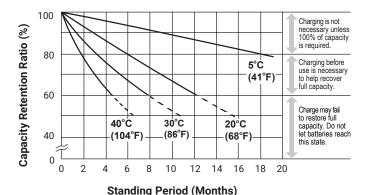

GLOBAL HEADQUARTERS

(USA AND INTERNATIONAL EXCLUDING EMEA)

Power-Sonic Corporation 365 Cabela Dr Suite 300, Reno, Nevada 89523

T: +1 619 661 2020

E: customer-service@power-sonic.com

POWER-SONIC EMEA

(EMEA – EUROPE, MIDDLE EAST AND AFRICA)

Smitspol 4, 3861 RS Nijkerk, The Netherlands T NL: + 31 33 7410 700 T UK: + 44 1268 560 686

T FR: + 33 344 32 18 17 E: salesEMEA@power-sonic.com

CHARGING

Cycle Applications: Apply constant voltage charge at 2.35v/c - 2.45v/c (14.1 - 14.7v for 12v Monobloc) at 20°C. Initial charging current should be set at less than 0.25C Amps. Switch to float charge to avoid overcharging.

"Float" or "Stand-By" Service: Apply constant voltage charge of 2.25v/c – 2.30v/c (13.5 to 13.8 volts for 12v Monobloc at 20°C. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition.

Temperature Compensation: Charging Voltage for both Cyclic and Standby applications should be regulated in relation to ambient temperature. As temperature rises charging voltage should be reduced to prevent overcharge and increased as temperature falls to avoid undercharge.

For further charging information including temperature compensation factors, see Power Sonic Technical Manual/Power Sonic Charger specifications.

APPLICATIONS

- UPS
- Telecoms
- Data Center
- Fire and Security

CHARGERS

Power Sonic offers a wide range of chargers suitable for batteries with a variety of capacities.

Please refer to our website for more information on our switch mode and transformer type chargers.

Please contact our technical department for advice if you have difficulty in locating a suitable charger.

FURTHER INFORMATION

Please refer to our website **www.power-sonic.com** for a complete range of useful downloads, such as product catalogs, material safety data sheets (MSDS), ISO certification, etc.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Power-Sonic:

<u>PSH-655 FR</u> <u>PSH-655F1-HR</u>