

XDSL SPLITTER FILTER MODULE

B8846NL

SmartER Series



Pulse
A TECHNITROL COMPANY



- POTS CO splitter for standard ADSL2/VDSL2 (ITU G993.2) applications
- LPF compliant with ETSI complex impedance ($Z_L = 270 \Omega + 750 \Omega / 150 \text{ nF}$), option B of ETSI TS 101-952-1, v1.1.1 and to BT SIN-346 complex impedance ($Z = 320 \Omega + 1050 \Omega / 230 \text{ nF}$)
- Part of a standard series which has footprint compatibility
- For ADSL, ADSL2+, VDSL and VDSL2 applications
- Compliant with Broadband Forum TR-127 standard for VDSL2 applications
- Patented technology US7598837, US7598839, CN1667763, EP1644943, TWI316724, CA2531599

Electrical Specifications @ 25°C

PARAMETER	FREQUENCY	
POTS Impedance	100 Hz to 4 kHz	$Z_L = 270 \Omega + 750 \Omega / 150 \text{ nF}$ - $Z = 320 \Omega + 1050 \Omega / 230 \text{ nF}$
POTS Insertion Loss	1 kHz	1d dB MAX
POTS Insertion Loss Distortion relative to 1 kHz	200 Hz to 4 kHz	1 dB MAX
POTS Return Loss	300 Hz to 2 kHz	18 dB MIN
	2 kHz to 3.4 kHz	14 dB MIN
POTS Group Delay	200 Hz to 4 kHz	200 μs MAX
Longitudinal Balance	50 Hz to 600 Hz	40 dB MIN
	600 Hz to 3.4 kHz	46 dB MIN
	3.4 kHz to 4 kHz	40 dB MIN
xDSL Insertion Loss	32 kHz to 140 kHz	45 dB MIN
	140 kHz to 30 MHz	55 dB MIN
DC Current		80 mA MAX
Total DC Resistance		50 Ω MAX

The mechanical and schematic are on the next page.

XDSL SPLITTER FILTER MODULE

B8846NL


SmartER Series



Pulse
A TECHNITROL COMPANY

Mechanical

B8846NL

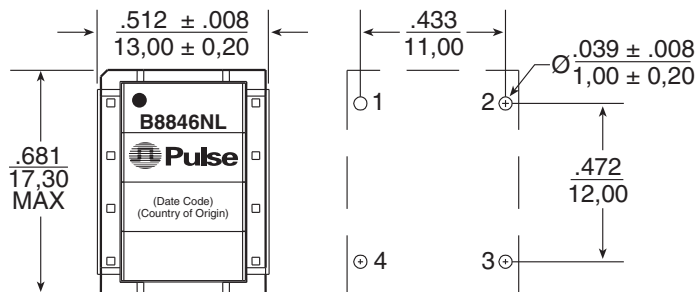

SUGGESTED BOARD LAYOUT

Weight 5.0 grams


Tray80/tray

Dimensions: Inches
mm

Unless otherwise specified,
all tolerances are $\pm .010$
0,25

Schematic

B8846NL

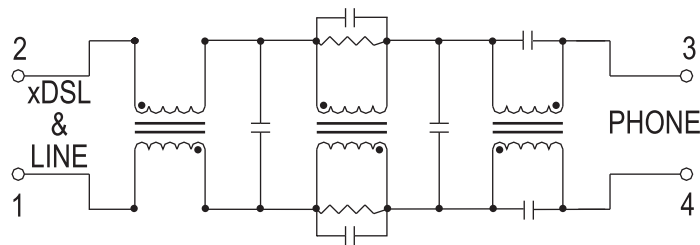

For More Information:

Pulse Worldwide Headquarters

12220 World Trade Dr.
San Diego, CA 92128
U.S.A.

www.pulseeng.com

Tel: 858 674 8100

Fax: 858 674 8262

Pulse Europe

Zeppelinstrasse 15
D-71083 Herrenberg
Germany

Tel: 49 7032 7806 0

Fax: 49 7032 7806 135

Pulse China Headquarters

B402, Shenzhen Academy of
Aerospace Technology Bldg.
10th Kejinan Rd.
High-Tech Zone
Nanshan District
Shenzhen, PR China 518057

Tel: 86 755 33966678

Fax: 86 755 33966700

Pulse North China

Room 2704/2705
Super Ocean Finance
Ctr.
2067 Yan An Rd. West
Shanghai 200336
China

Tel: 86 21 62787060

Fax: 86 2162786973

Pulse South Asia

135 Joo Seng Rd.
#03-02
PM Industrial Bldg.
Singapore 368363

Tel: 65 6287 8998

Fax: 65 6287 8998

Pulse North Asia

3F, No. 198
Zhongyuan Rd.
Zhongli City
Taoyuan County 320
Taiwan R. O. C.

Tel: 886 3 4356768

Fax: 886 3 4356823 (Pulse)

Fax: 886 3 4356820 (FRE)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.

© Copyright, 2010. Pulse Engineering, Inc. All rights reserved.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

B8846NL