

SMT Power Inductors

Unshielded Drum Core - PA0390NL Series



- Height:** 5.1 Max
- Footprint:** 8.89mm x 6.10mm Max
- Current Rating:** up to 6.0A
- Inductance Range:** 0.6μH to 113μH

Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C

Part ^{6,7} Number	Inductance @ 10kHz (μH ±20%)	I _{rated} ⁵ (A)	DCR (MAX) (mΩ)	Saturation Current (A) @ 25°C	Heating Current (A)
PA0390.471NL	0.6	6	9.7	7.7	6
PA0390.102NL	1.2	4.4	17.7	5.3	4.4
PA0390.152NL	1.6	4.2	20	4.5	4.2
PA0390.222NL	2.6	3.1	36.3	3.5	3.1
PA0390.332NL	3.8	2.9	42.8	3	2.9
PA0390.472NL	5.2	2.2	54.4	2.6	2.2
PA0390.682NL	6.9	1.7	89.7	2.2	1.7
PA0390.103NL	11	1.5	110.7	1.9	1.5
PA0390.153NL	16	1.2	174.7	1.5	1.2
PA0390.223NL	23	1	254.1	1.2	1
PA0390.333NL	36	0.82	367	0.99	0.82
PA0390.473NL	48	0.72	474	0.87	0.72
PA0390.683NL	73	0.58	732	0.67	0.58
PA0390.104NL	113	0.47	1109	0.53	0.47


Notes:

- The temperature of the component (ambient plus temperature rise) must be within the specified operating temperature range.
- Inductance tested at 100kHz, 250mV_{RMS}.
- Inductance drop = 10% typical at the Saturation Current.
- ΔT = 40°C rise typical at the Heating Current
- The rated current is the lower of the saturation or heating current.
- Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. PA0390.102NL becomes PA0390.102NLT). Pulse complies to industry standard tape and reel specifications EIA481.
- The "NL" suffix indicates an RoHS-compliant part number. Non-NL suffixed parts are not necessarily RoHS compliant, but are electrically and mechanically equivalent to NL versions. If a part number does not have the "NL" suffix, but an RoHS compliant version is required, please contact Pulse for availability.

Mechanical

Schematic

PA0390.XXXNL

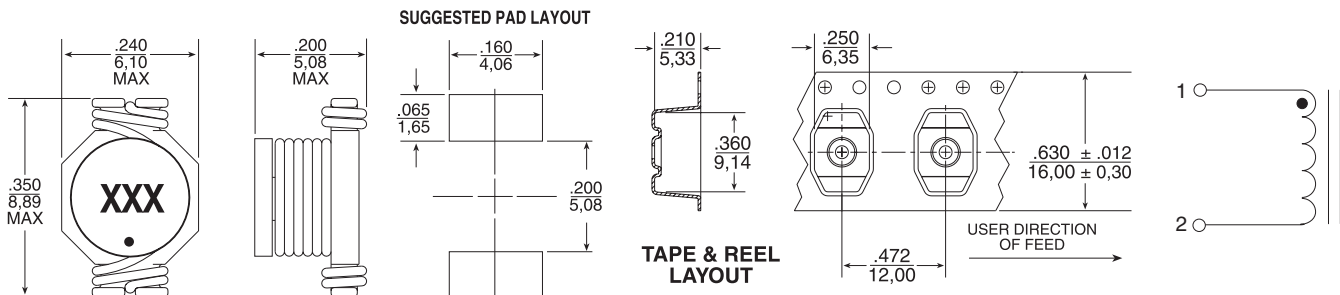

SMT Power Inductors

Unshielded Drum Core - PA0390NL Series



For More Information

Pulse Worldwide Headquarters

15255 Innovation Drive Ste 100
San Diego, CA 92128
U.S.A.

Tel: 858 674 8100
Fax: 858 674 8262

Pulse Europe

Pulse Electronics GmbH
Am Rottland 12
58540 Meinerzhagen
Germany

Tel: 49 2354 777 100
Fax: 49 2354 777 168

Pulse China Headquarters

Pulse Electronics (ShenZhen) CO., LTD
D708, Shenzhen Academy of
Aerospace Technology,
The 10th Keji South Road,
Nanshan District, Shenzhen,
P.R. China 518057

Tel: 86 755 33966678
Fax: 86 755 33966700

Pulse North China

Room 2704/2705
Super Ocean Finance Ctr.
2067 Yan An Road West
Shanghai 200336
China

Tel: 86 21 62787060
Fax: 86 21 62786973

Pulse South Asia

3 Fraser Street 0428
DUO Tower
Singapore 189352

Tel: 65 6287 8998
Fax: 65 6280 0080

Pulse North Asia

1F., No.111 Xiyuan Road
Zhongli District
Taoyuan City 32057
Taiwan (R.O.C)

Tel: 886 3 4356768
Fax: 886 3 4356820

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2019. Pulse Electronics, Inc. All rights reserved.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

[PA0390.102](#) [PA0390.103](#) [PA0390.103T](#) [PA0390.104](#) [PA0390.152](#) [PA0390.153](#) [PA0390.222](#) [PA0390.223](#)
[PA0390.223T](#) [PA0390.332](#) [PA0390.333](#) [PA0390.471](#) [PA0390.472](#) [PA0390.472T](#) [PA0390.473](#) [PA0390.682](#)
[PA0390.683](#) [PA0390.102NLT](#) [PA0390.103NLT](#) [PA0390.471NLT](#) [PA0390.472NLT](#) [PA0390.473NLT](#) [PA0390.471T](#)