

# Wearable Receive Wireless Charge Coil

Pulse Part Number WMRR124F-1

V02



## Features

- Magnetic Coil: antifreeze plate + coil
- Meet the Qi international standard, be customized according to order
- Ultrathin 、 compact 、 high efficiency 、 low heat
- Length and gap of the outgoing line is customizability

## Application

- Wearable wireless charge

## Electrical specifications


Output Voltage(V)	5
Maximum Output Current (mA)	100-300(max)
Inductance(uH)	11.2±10%
Internal Resistance (mΩ)	580±10%
Wire Diameter (mm)	0.15mm±0.05(double)
Testing Environment	100KHZ 1V

# Wearable Receive Wireless Charge Coil


Pulse Part Number WMRR124F-1

V02


## Mechanical dimensions

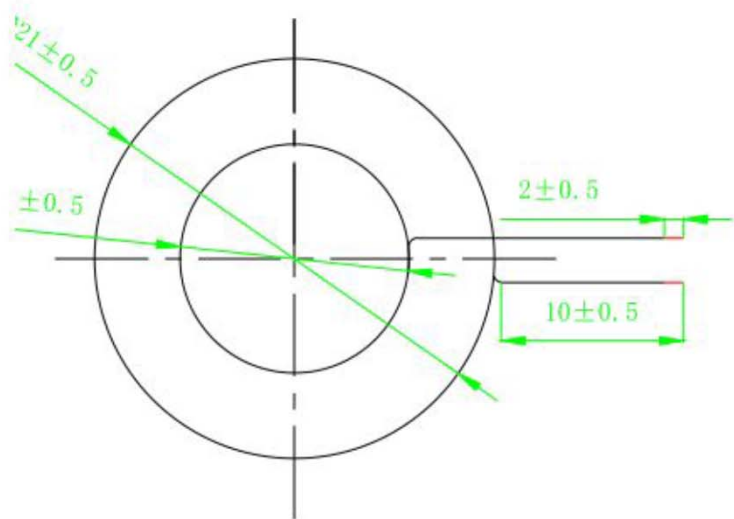

### Thickness

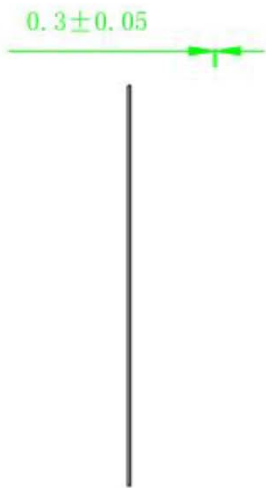

Coil

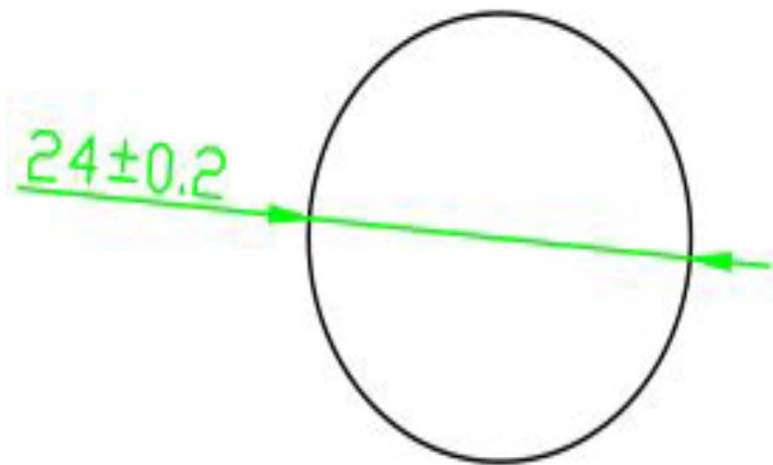

Antifreeze plate

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

[WMRR124F-1](#)