

Track Shaped Receive Wireless Charge Coil

Pulse Part Number WMRR132F-0

V02



Features

- Magnetic Coil: antifreeze plate + coil
- Meet the Qi international standard, be customized according to order
- Ultrathin 、 compact 、 high efficiency 、 low heat
- Length and gap of the outgoing line is customizability

Application

- Wearable wireless charge

Electrical specifications


Output Voltage(V)	5
Maximum Output Current (mA)	100-400(max)
Inductance(uH)	$11.5 \pm 10\%$
Internal Resistance ($m\Omega$)	$590 \pm 10\%$
Wire Diameter (mm)	$0.15mm \pm 0.05$
Testing Environment	100KHZ 1V

Track Shaped Receive Wireless Charge Coil



Pulse Part Number WMRR132F-0

V02


Mechanical dimensions

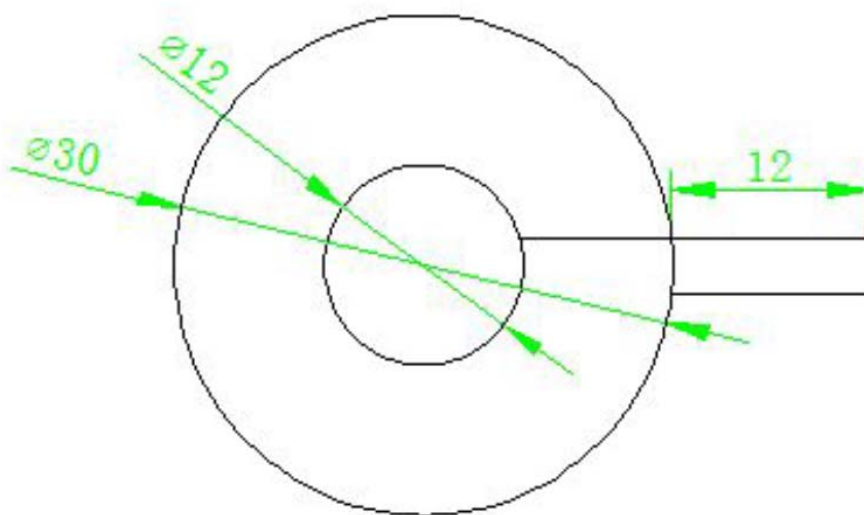

Coil

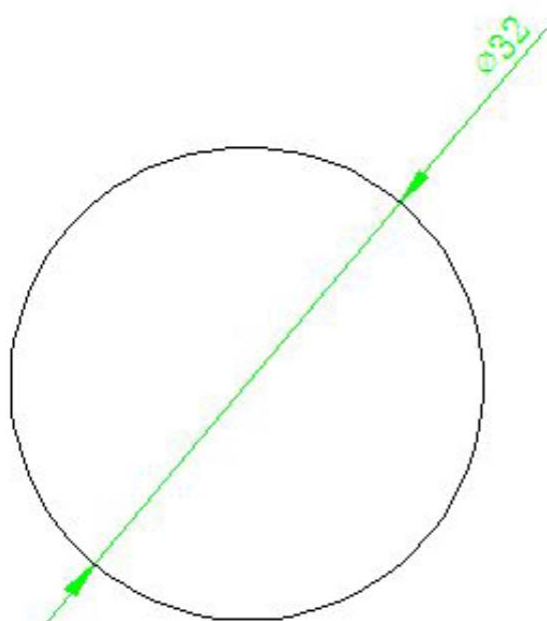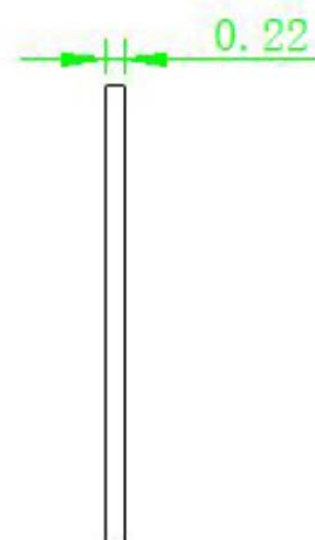

Antifreeze plate

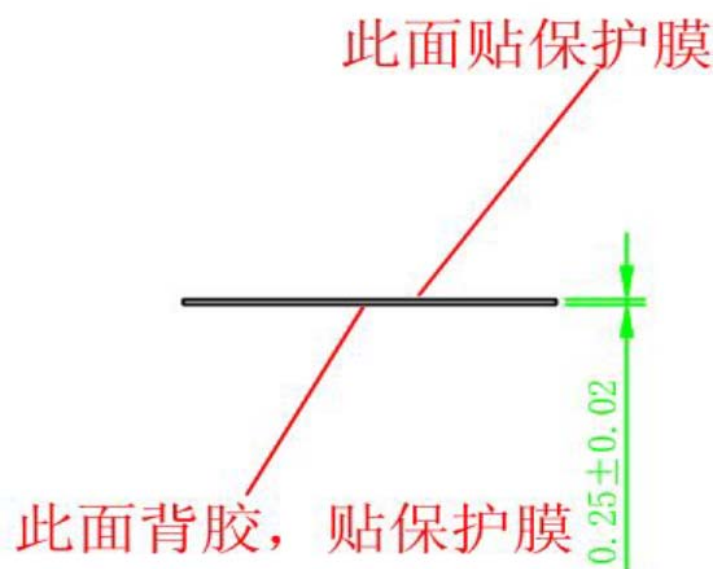

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

[WMRR132F-0](#)