


DIPLEXERS FOR HFC EQUIPMENT AND CABLE MODEMS

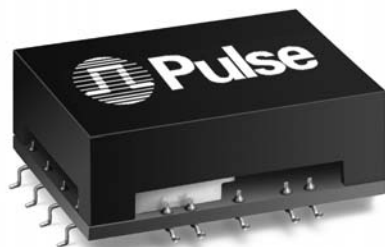

- ➊ Ideal for HFC equipment, cable modem and set top box equipment
- ➋ Improved performance
- ➌ Small surface mount component
- ➍ 42/52MHz frequency splits
- ➎ 5 - 870MHz range

Electrical Specifications @ 25°C


Part No.	Low Pass Filter		High Pass Filter			Impedance (All Ports)	Crossover Isolation @ 42-52MHz	Floor Isolation		
	Passband (dB) (Insertion Loss) @ 5-42MHz	Return Loss (dB) @ 5-42MHz	Passband (dB) (Insertion Loss) @ 52-870MHz	Return Loss (dB)				@ 5-42MHz	@ 52-600MHz	@ 600-870MHz
				@ 52-750MHz	@ 751-870MHz					
C6001	<1.0	≥20	<1.0	20	18	75	31	45	43	40
C6001L	<1.2	≥18	<1.0	18	16	75	28	45	43	40

NOTES: **C6001** - capable of withstanding 500Vdc
C6001L (Cost-effective) - capable of withstanding 50Vdc



Mechanical

Block Diagram

C6001/C6001L

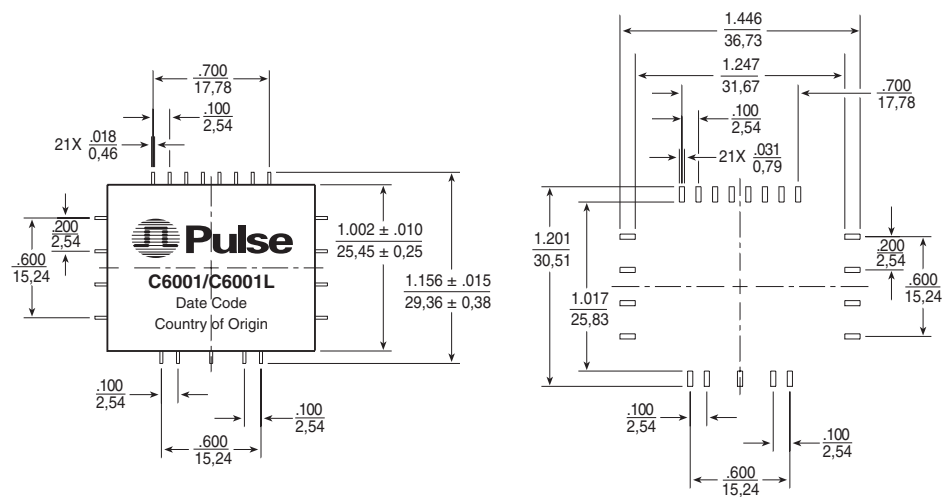

SUGGESTED PAD LAYOUT

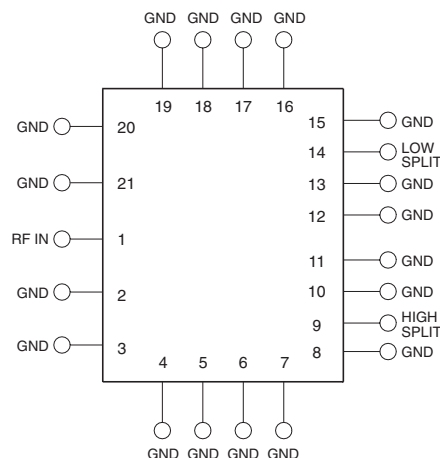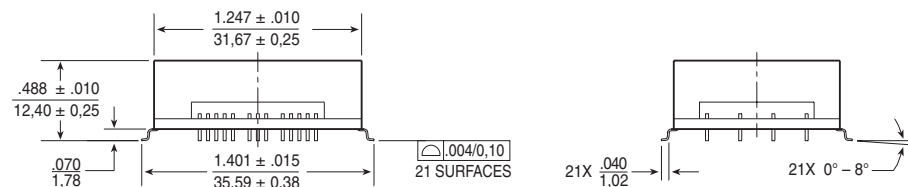

Weight8.5 grams

Tray56/tray





Dimensions: $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified, all tolerances are $\pm \frac{.010}{0.25}$

DIPLEXERS FOR HFC EQUIPMENT AND CABLE MODEMS



Typical Performance @ 25°C C6001 and C6001L

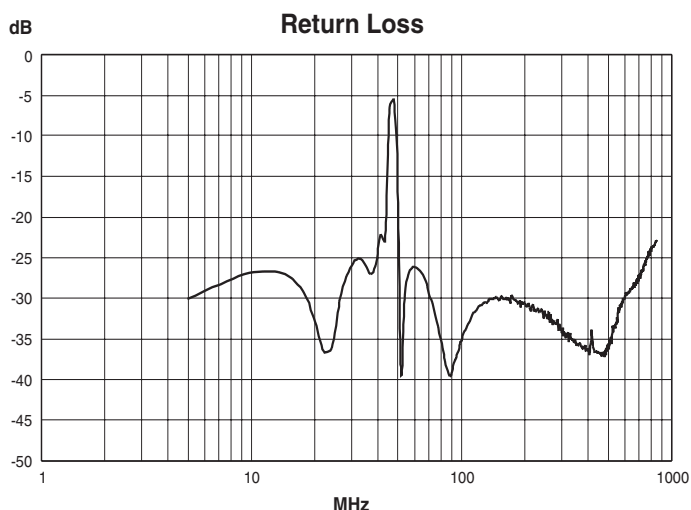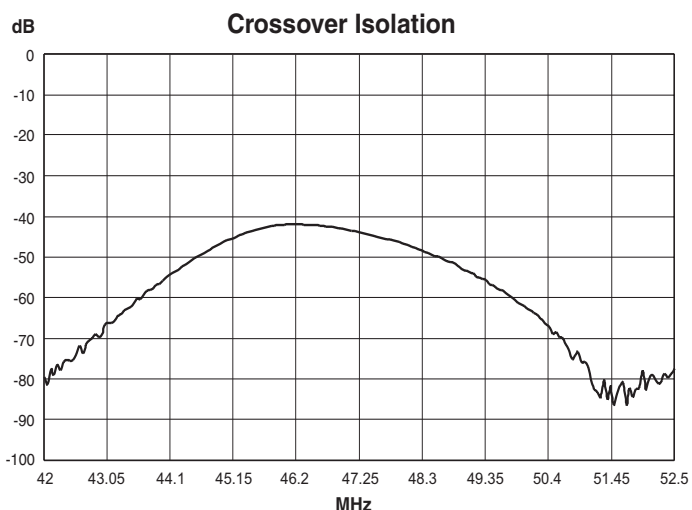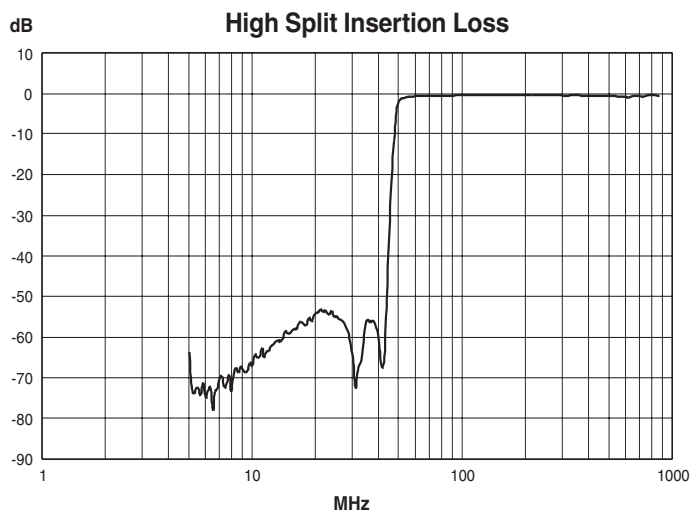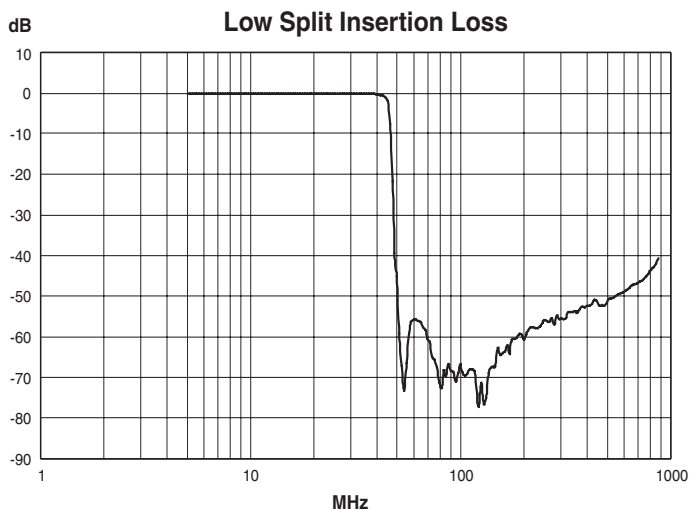

For More Information :

UNITED STATES (Worldwide)

12220 World Trade Drive
San Diego, CA 92128
U.S.A.
<http://www.pulseeng.com>
TEL: 858 674 8100
FAX: 858 674 8262

UNITED KINGDOM (Northern Europe)

1 & 2 Huxley Road
The Surrey Research Park
Guildford, Surrey GU2 5RE
United Kingdom
TEL: 44 1483 401700
FAX: 44 1483 401701

FRANCE (Southern Europe)

Zone Industrielle
F-39270
Orgelet
France
TEL: 33 3 84 35 04 04
FAX: 33 3 84 25 46 41

SINGAPORE (Southern Asia)

150 Kampong Ampat
#07-01/02
KA Centre
Singapore 368324
TEL: 65 6287 8998
FAX: 65 6280 0080

TAIWAN, R.O.C. (Northern Asia)

3F-4, No. 81, Sec. 1
HsinTai Wu Road
Hsi-Chih, Taipei Hsien
Taiwan, R.O.C.
Tel: 886 2 2698 0228
FAX: 886 2 2698 0948

HONG KONG (China/Hong Kong)

9/F, Phase 2, Tai Sang
Shatin Warehouse Centre
6 Wong Chuk Yeung Street
Fotan, Shatin, Hong Kong
TEL: 852 2788 6588
FAX: 852 2776 1055

DISTRIBUTOR

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

C6001 C6001L