



KXTIK Accelerometer

3x3x0.9mm Accelerometer with FIFO/FILO Buffer

FEATURES

- Small Package - 3x3x0.9mm LGA
- User-selectable g Range
- User-selectable Output Data Rate
- Enhanced integrated Directional Tap/Double-Tap™, Activity-monitoring, and Device-orientation Algorithms
- Digital I²C
- 8-bit or 12-bit Resolution
- FIFO/FILO Memory Buffer
- Digital High-Pass and Low-Pass Filter Outputs
- Low Power Consumption
- Lead-free Solderability
- Excellent Temperature Performance
- High Shock Survivability
- Factory Programmable Offset and Sensitivity
- Self-test Function

APPLICATIONS

- User Interface
- Active/Inactive Monitoring
- Device Orientation
- Gesture Recognition
- Tap Detection
- Pedometer/Activity Monitoring

FOR


- Smartphones and Mobile Devices
- Gaming and Virtual Reality
- Health and Fitness

PRODUCT OVERVIEW

The Kionix KXTIK is a low power, high performance tri-axis accelerometer with digital I²C output. The KXTIK features user-selectable parameters including 8-bit or 12-bit modes, g-ranges from $\pm 2g$, 4g or 8g, and Output Data Rates from 12.5 Hz to 800 Hz. A 252 byte FIFO/FILO buffer offers programmable watermark interrupt and provides a triggered low resolution or high resolution mode.

The KXTIK features a 16-pin package, making it pin compatible with popular products on the market. The KXTIK also offers enhanced embedded Screen Rotation, Directional Tap/Double Tap, Orientation Detection and Low Power Motion Interrupt.

The KXTIK has an internal voltage regulator that allows operation from 1.8 V to 3.6 V with an operating temperature range of -40°C to +85°C.

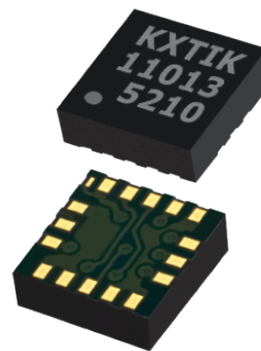



KXTIK Accelerometer

3x3x0.9mm Accelerometer with FIFO/FILO Buffer

The performance parameters below are programmed and tested at 2.6 volts and T = 25°C. The device can accept supply voltages from 1.8V to 3.6V. Due to internal voltage regulators, there should be minimal change with supply voltage variations.

PERFORMANCE SPECIFICATIONS			
PARAMETERS	UNITS	KXTIK-1004	CONDITION
Range	g	±2.0, ±4.0, ±8.0	User-selectable full-scale output range
Sensitivity ¹	counts/g	64, 32, 16	8-bit
		1024, 512, 256	12-bit
0g Offset vs. Temp	mg/°C	±0.7 (xy) ±0.4 (z) typical	-40°C to +85°C
Sensitivity vs. Temp	%/°C	±0.01 (xy) ±0.03 (z) typical	-40°C to +85°C
Mechanical Resonance ²	Hz	3500 (xy) 1800 (z) typical	-3dB
Output Data Rate (ODR) ³	Hz	12.5 min; 50 typical; 800 max	
Bandwidth (-3dB) ⁴	kHz	1.59	RES = 0
	Hz	ODR/2	RES = 1
Non-Linearity	% of FS	0.6 typical	% of full scale output
Cross-axis Sensitivity	%	2.0 typical	
I ² C Communication Rate	kHz	400 max	
Power Supply	V	2.6 typical	1.8V – 3.6V
Current Consumption	µA	325 typical	High resolution (RES = 1)
		165 typical	Directional Tap™; RES = 0; ODR = 400Hz
		100 typical	Low resolution; RES = 0; ODR ≤ 25Hz
		10 typical	Standby
ENVIRONMENTAL SPECIFICATIONS			
PARAMETERS	UNITS	KXTIK-1004	CONDITION
Operating Temperature	°C	-40 to 85	Powered
Storage Temperature	°C	-55 to 150	Un-powered
Mechanical Shock	g	5,000, 0.5 ms 10,000, 0.2 ms	Powered or un-powered, halversine
ESD	V	2,000	Human body model

NOTES

¹ Resolution and acceleration ranges are user selectable via I2C.

² Resonance as defined by the dampened mechanical sensor.

³ User selectable through I2C.

⁴ User selectable; dependent on ODR and RES.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Kionix:

[KXTIK-1004-FR](#) [KXTIK-1004-PR](#)