
0603 <1.6×0.8 t=0.36mm> Low Current Type(IF≦10mA)



SMLE12WB *** Series

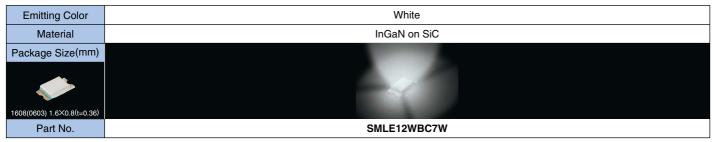

note) "-" will be taken out for emitting color B/E series.

■ Absolute Maximum Ratings (Ta=25°C)


	Part No.	Emitting color	Power dissipation P _D (mW)	Forward current IF (mA)	Peak forward current IFP* (mA)	Reverse voltage V _R (V)		Storage temperature Tstg (C)
١	SMLE12WBC7W	White	66	20	100	5	-30 to +85	-40 to +100

^{*:}Duty ≦1/10, 1kHz.

■Electrical Optical Characteristics (Ta=25°C)

Part No.	Resin	Forward voltage V _F		Reverse current In		Brightness Iv			Chromaticity coordinates		
		Typ. (V)	lF (mA)	Max. (μΑ)	Vr (V)	Min. (mcd)	Typ. (mcd)	lF (mA)	Х	Υ	IF (mA)
SMLE12WBC7W	Phosphor included	2.9	5	100	5	22	71	5	0.30	0.30	5

■Chromaticity Diagram




Chromaticity	Coordinates	(Ta=25°C,	IF=5mA)

Α		F		н		К		С	
x	у	х	у	х	у	х	у	х	у
0.280	0.248	0.283	0.305	0.287	0.295	0.304	0.330	0.330	0.318
0.296	0.276	0.304	0.330	0.307	0.315	0.330	0.360	0.356	0.351
0.283	0.305	0.307	0.315	0.311	0.294	0.330	0.318	0.361	0.385
0.264	0.267	0.287	0.295	0.296	0.276	0.311	0.294	0.330	0.360


Measurement tolerance:±0.02

■Packaging Specifications (Unit:mm)




■Recommended Pad Layout


The recommended thickness of the screen mask for soldering is between 100 and 150µm. The hole size of the screen mask should be same as the recommended land pattern or smaller.

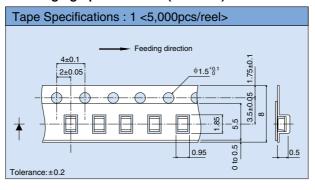


■Dimensions (Unit:mm)

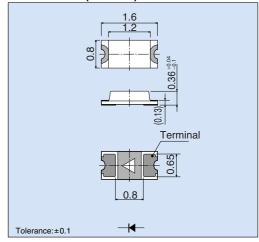


■ Directivity (Typ.)

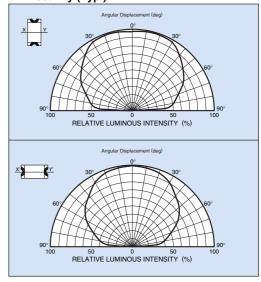




■Electrical Characteristic Curves


Forward Current - Forward Voltage



Relative Luminous Intensity - Case Temperature




Relative Luminous Intensity - Forward Current




SMLE12WBC7W

SMLE12WBC7W


SMLE12WBC7W



Derating



Forward Current - Chromaticity Diagram



- SMLE12WBC7W

SMLE12WBC7W

SMLE12WBC7W

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any
 means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the
 product described in this document are for reference only. Upon actual use, therefore, please request
 that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard
 use and operation. Please pay careful attention to the peripheral conditions when designing circuits
 and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or
 otherwise dispose of the same, no express or implied right or license to practice or commercially
 exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

It is our top priority to supply products with the utmost quality and reliability. However, there is always a chance of failure due to unexpected factors. Therefore, please take into account the derating characteristics and allow for sufficient safety features, such as extra margin, anti-flammability, and fail-safe measures when designing in order to prevent possible accidents that may result in bodily harm or fire caused by component failure. ROHM cannot be held responsible for any damages arising from the use of the products under conditions out of the range of the specifications or due to non-compliance with the NOTES specified in this catalog.

Thank you for your accessing to ROHM product informations.

More detail product informations and catalogs are available, please contact your nearest sales office.

ROHM Customer Support System

THE AMERICAS / EUPOPE / ASIA / JAPAN

www.rohm.com

Contact us : webmaster@rohm.co.jp

Copyright © 2007 ROHM CO.,LTD.

ROHM CO., LTD. 21, Saiin Mizosaki-cho, Ukyo-ku, Kyoto 615-8585, Japan

pan TEL:+81-75-311-2121 FAX:+81-75-315-0172



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ROHM Semiconductor: SMLE12WBC7W1