

Photointerrupter, Taller type

Absolute maximum ratings (Ta=25°C)

Parameter		Symbol	Limits	Unit
Input (LED)	Forward current	IF	50	mA
	Reverse voltage	VR	5	V
	Power dissipation	PD	80	mW
Output (photo-transistor)	Collector-emitter voltage	VCEO	30	V
	Emitter-collector voltage	VECO	4.5	V
	Collector current	IC	30	mA
	Collector power dissipation	PC	80	mW
	Operating temperature	Topr	-25 to +85	°C
Storage temperature		Tstg	-30 to +85	°C
Soldering temperture		Tsol	260 / 3 *	°C / s

* 1.6mm from the body bottom.

Electrical and optical characteristics (Ta=25°C)

Parameter		Symbol	Min.	Typ.	Max.	Unit	Conditions
Input (LED)	Forward voltage	VF	-	1.3	1.6	V	IF=50mA
	Reverse current	IR	-	-	10	μA	VR=5V
Output (photo-transistor)	Dark current	ICEO	-	-	0.5	μA	VCE=10V
	Peak sensitivity wavelength	λP	-	800	-	nm	-
Transfer characteristics	Collector current	IC	0.2	0.7	2.0	mA	VCE=5V, IF=20mA
	Collector-emitter saturation voltage	VCE(sat)	-	-	0.4	V	IF=20mA, IC=0.1mA
	Response time	tr	-	10	-	μs	VCC=5V, IF=20mA, RL=100Ω
Infrared light emitter diode	Cut-off frequency	fc	-	1	-	MHz	IF=50mA
	Peak light emitting wavelength	λP	-	950	-	nm	* Non-coherent Infrared light emitting diode used.
Photo transistor	Response time	tr-tf	-	10	-	μs	VCC=5V, IC=1mA, RL=100Ω
	Maximum sensitivity wavelength	λP	-	800	-	nm	* This product is not designed to be protected against electromagnetic wave.

Electrical and optical characteristics curves

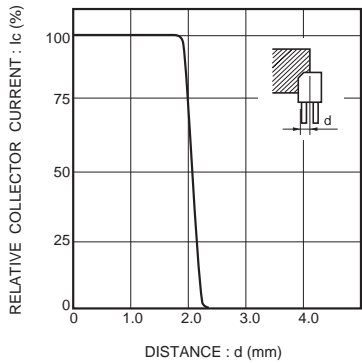


Fig.1 Relative output vs. distance (I)

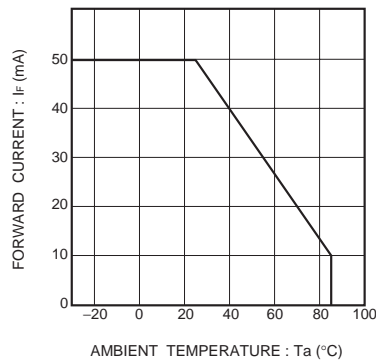


Fig.2 Forward current falloff

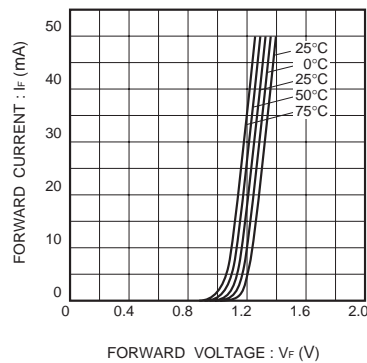


Fig.3 Forward current vs. forward voltage

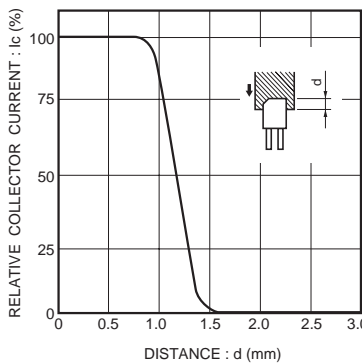


Fig.4 Relative output vs. distance (II)

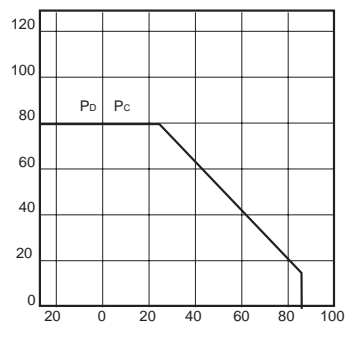


Fig.4 Power dissipation / collector power dissipation vs. ambient temperature


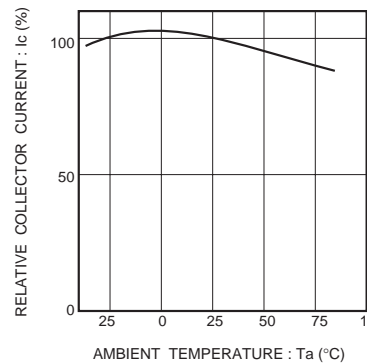


Fig.5 Relative output vs. ambient temperature

External dimensions (Unit : mm)

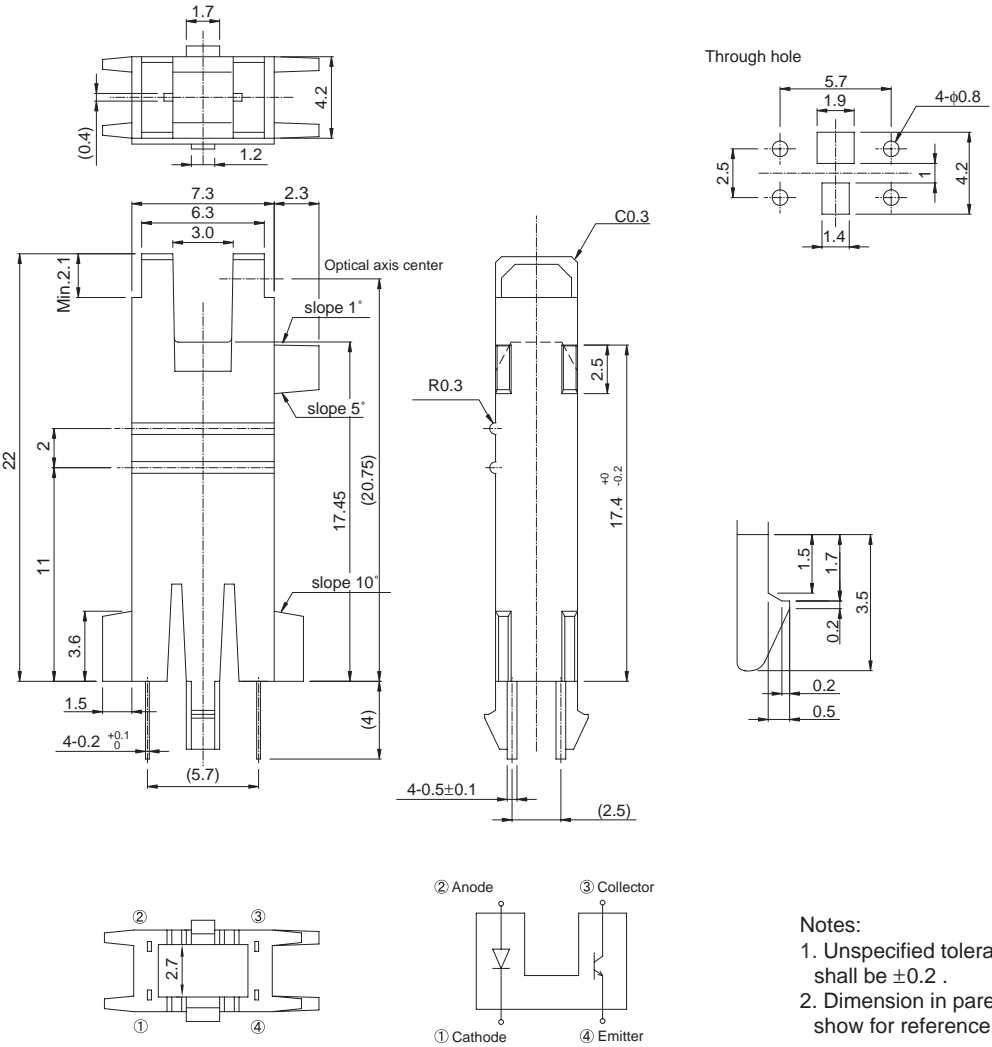

Notes:
1. Unspecified tolerance shall be ±0.2 .
2. Dimension in parenthesis are show for reference.

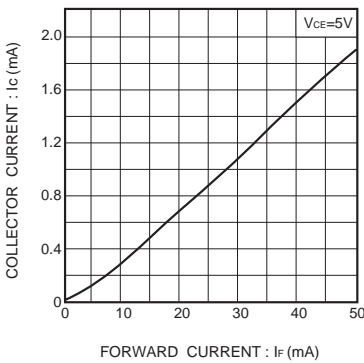


Fig.7 Collector current vs. forward current

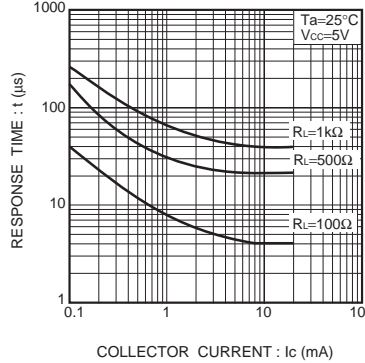


Fig.8 Response time vs. collector current

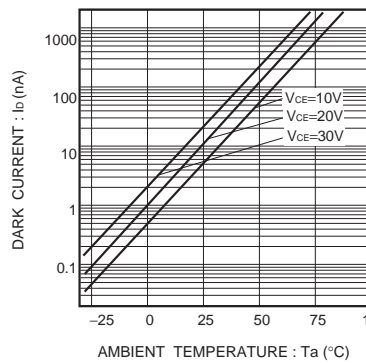


Fig.9 Dark current vs. ambient temperature

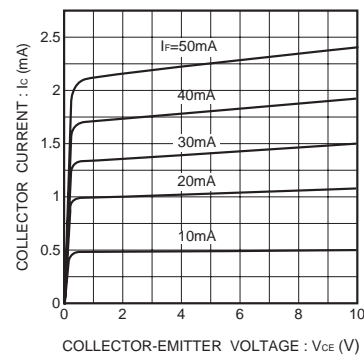


Fig.10 Output characteristics

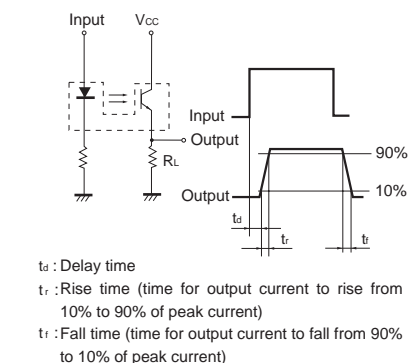


Fig.11 Response time measurement circuit

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ROHM Semiconductor:](#)

[RPI-303](#)