Product data sheet Characteristics

XVC6B25S

60mm Tower RO Pole Buzzer Flash



Product availability: Non-Stock - Not normally stocked in distribution facility



Main

Mairi		
Range of product	Harmony XVC6	
Product or component type	Complete pre-wired monolithic tower light	
Beacon or indicator bank unit type	2 illuminated units	
Sound signalling	Buzzer	
Mounting diameter	2.36 in (60 mm)	
Component name	XVC	
Light source	Orange LED steady or flashing Red LED steady or flashing	
[Us] rated supply voltage	24 V	
Supply circuit type	AC/DC	
Noise level	7085 dB (continuous or intermittent tone)at 1 m	

Complementary

Material	Polycarbonate (illuminated unit) ABS (acrylonitrile butadiene-styrene) (base unit) PBT + ABS (UL94HB) (top cover)	
	STK (chromium-plated) (support tube)	
Product mounting	On support tube, 22 mm	
Cable cross section	0 in ² (0.33 mm ²)	
AWG gauge	AWG 22	
Cable length	21.65 in (550 mm)	
Marking	CE	
[Uimp] rated impulse withstand voltage	0.8 kV	
Current consumption	90 mA	
Fundamental frequency	2.23 kHz	
Flashing frequency	1 Hz	
Product weight	2.07 lb(US) (0.94 kg)	
Height	20.59 in (523.1 mm)	

Environment

Standards	EN/IEC 61000-6-2	
	EN/IEC 61000-6-4	
	EN/IEC 61000-6-3	
Product certifications	UL	
Protective treatment	TC	
Ambient air temperature for storage	-31158 °F (-3570 °C)	
Ambient air temperature for operation	14122 °F (-1050 °C)	
Electrical shock protection class	Class I conforming to EN/IEC 61140	
IP degree of protection	IP23 in vertical surface installation conforming to EN/IEC 60529	
	IP54 in flat surface installation conforming to EN/IEC 60529	

Ordering and shipping details

Category	22617 - XVC TOWER LIGHTS
Discount Schedule	XV
GTIN	00785901670827
Nbr. of units in pkg.	1
Package weight(Lbs)	2.41999999999999
Returnability	N
Country of origin	ID

Offer Sustainability

Sustainable offer status	Green Premium product	
RoHS (date code: YYWW)	Compliant - since 0808 - Schneider Electric declaration of conformity Schneider Electric declaration of conformity	
REACh	Reference not containing SVHC above the threshold	
Product environmental profile	Available	
Product end of life instructions	Need no specific recycling operations	
California proposition 65	WARNING: This product can expose you to chemicals including:	
Substance 1	Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm.	
More information	For more information go to www.p65warnings.ca.gov	


Contractual warranty

Warranty period	18 months	

Pre-assembled and Pre-wired Tower Light with Support Tube Mounting

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get b1 dimension.

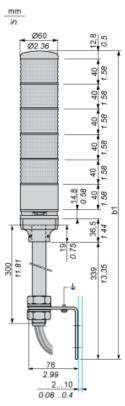


No. of illuminated units	b1 With buzzer (mm)	b1 With buzzer (in.)
1 stage	483.1	19.02
2 stages	523.1	20.59
3 stages	563.1	22.17
4 stages	603.1	23.74
5 stages	643.1	25.32

Product data sheet Mounting and Clearance

XVC6B25S

Pre-assembled and Pre-wired Tower Light

Support Tube Mounting



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Schneider Electric: XVC6B25S