

Product data sheet

Characteristics

XGFEC2525

field expander universal type - Sn 26..150 mm -
250 x 250 x 10 mm



Product availability: Non-Stock - Not normally stocked in distribution facility



Main

Range of product	OsiSense XG
Accessory / separate part type	Field expander
Product specific application	Universal
Product compatibility	XGCS4901201 + XGHB221346 XGCS4901201 + XGHB90E340 XGCS4901201 + XGHB320246 XGCS4901201 + XGHB440245 XGCS4901201 + XGHB320345 XGCS4901201 + XGHB520246
Accessory / separate part destination	Station with associated label
[Sn] nominal sensing distance	1.02...5.91 in (26...150 mm)

Complementary

Accessory dimension	250 x 250 x 10 mm
---------------------	-------------------

Ordering and shipping details

Category	22491 - SENS,IDENTIFICATION DEVICE (XGK)
Discount Schedule	DS2
GTIN	00785901852223
Nbr. of units in pkg.	1
Package weight(Lbs)	1.27
Returnability	N
Country of origin	FR

Offer Sustainability


Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0910 - Schneider Electric declaration of conformity Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold
Product environmental profile	Available
Product end of life instructions	Available
California proposition 65	WARNING: This product can expose you to chemicals including:
- - - - - Substance 1	Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and
- - - - - Substance 2	Diisodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm.
- - - - - More information	For more information go to www.p65warnings.ca.gov

Contractual warranty

Warranty period	18 months
-----------------	-----------

Dimensions


Field Expanders

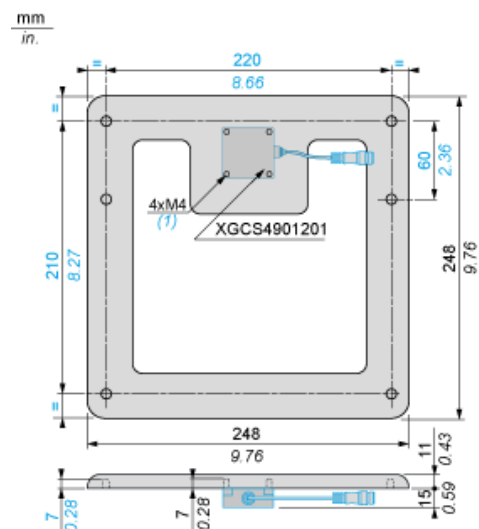

(1) 4 x M4 screws

Minimum Mounting Distances


Distance Between Field Expanders



Tag	e1	e2	e3
XGHB90E340 XGHB520246	570	890	960
XGHB320345	720	1275	1200

Minimum Mounting Distances in a Metal Structure


Distance Between Field Expanders



Field expanders	
e (mm)	h (mm)
0	75

Curves


Dialogue Zones for Field Expanders

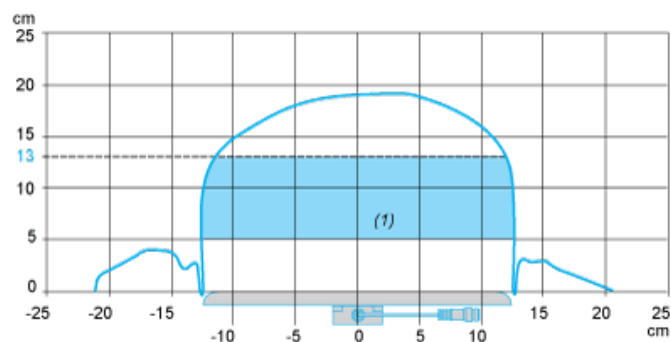

(1) Recommended working zone.

Curves

Dialogue Zones for Field Expanders

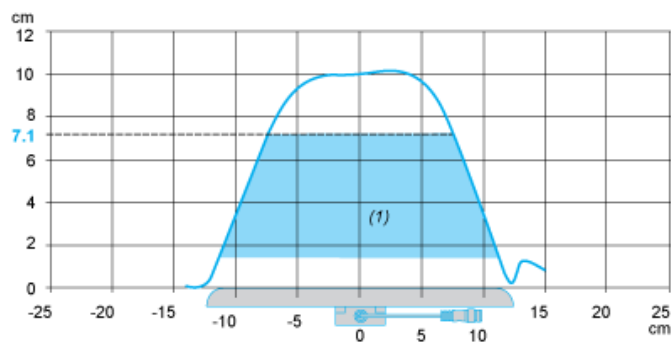

(1) Recommended working zone.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Schneider Electric:](#)

[XGFEC2525](#)