Circuit Breaker for Equipment thermal, Flange type, Manual ON/OFF, Quick connect terminals



Description

- Flange type - Thermal circuit breaker
- 1-pole
- Manual ON/OFF type
- Quick connect terminals 6.3 x 0.8 mm

Unique Selling Proposition

- Compact design
- Positively trip-free release
- Available with cover
- Different mounting possibilities

Technical Data

AC 240 VAC
28 VDC
0.05 - 15/16 A, see approbations
IEC 60934: PC1, AC 240 V: 1 kA
IEC 60934: at ln < 7 A/240 VAC : 8 x ln
IEC 60934: at In ≥ 7 A/240 VAC : 200 A
AC/DC 28 V : 400 A
front side IP40 acc. to IEC 60529
50Hz: > 1.5kV
Impulse 1.2/50 µs: > 2.5 kV
500 VDC > 100 MΩ
2 x Ir: 5000 switching cycles
Manual ON/OFF type
AC : $2 \times \text{Ir}$, $\cos \phi 0.6$:
DC : 2 x lr , L/R = 2 - 3 ms :
5000 switching cycles

See below: **Approvals and Compliances**

Applications

- Power supplies
- Uninterruptible power supply
- Power tools
- Household appliances Last order date: 30.09.2024 Last delivery date: 20.12.2024

Weblinks

pdf data sheet, html datasheet, General Product Information, Distributor-Stock-Check, Detailed request for product, Product News

Overload	IEC: min. 40 trips
	@ 6 x lr, cos φ 0.6
	UL / CSA: min. 50 trips
	@ 1.5 x lr, cos φ 0.75
Allowable Operation Temp.	-5 °C to 60 °C
Vibration Resistance	± 1.5 mm @ 10 - 60 Hz
	acc. to IEC 60068-2-6, test Fc
	10 G @ 60 - 500 Hz
	acc. to IEC 60068-2-6, test Fc
Shock Resistance	100 G / 6ms
	acc. to IEC 60068-2-27, test Ea
Tripping Type	Thermal
Actuation Type	Manual ON/OFF
Weight	ca. 10g

Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

T12-121

Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products. Approval Reference Type: T12

Approval Logo	Certificates	Certification Body	Description	
	VDE Approvals	VDE	VDE Certificate Number: 99673	
c FL [®] us	UL Approvals	UL	UR File Number: E71572	
	CCC Approvals	CCC	CCC Certificate Number: 2024010307710410	

Product standards

Product standards that are referenced

Design	Standard	Description
Designed according to	IEC 60934	Circuit-breakers for equipment (CBE)
Designed according to	UL 1077	Standard for Supplementary Protectors for Use in Electrical Equipment
Designed according to	CSA C22.2 No. 235	Supplementary Protectors
Designed according to	GB 17701	Circuit-breaker for equipment
	Designed according to Designed according to Designed according to	Designed according toIEC 60934Designed according toUL 1077Designed according toCSA C22.2 No. 235

Application standards

RoHS

Ð

REACH

Application standards where the product can be used

REACH

Organization	Design	Standard	Description
IEC	Suitable for applications acc.	IEC/UL 62368-1	Audio/video, information and communication technology equipment - Part 1: Safety requirements
Compliances The product comp	olies with following Guide Lines		
Identification	Details	Initiator	Description
CE	CE declaration of conformity	SCHURTER AG	The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.
UK CA	UKCA declaration of conformity	SCHURTER AG	The UKCA marking declares that the product complies with the applicable requirements laid down in the British Amendment of Regulation (EC)

SCHURTER AG

 UKCA declaration of conformity
 SCHURTER AG
 The UKCA marking declares that the product complies with the applicable requirements laid down in the British Amendment of Regulation (EC) 765/2008.


 RoHS
 SCHURTER AG
 Directive RoHS 2011/65/EU, Amendment (EU) 2015/863


 China RoHS
 SCHURTER AG
 The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.

On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.

Dimension [mm] T12-111



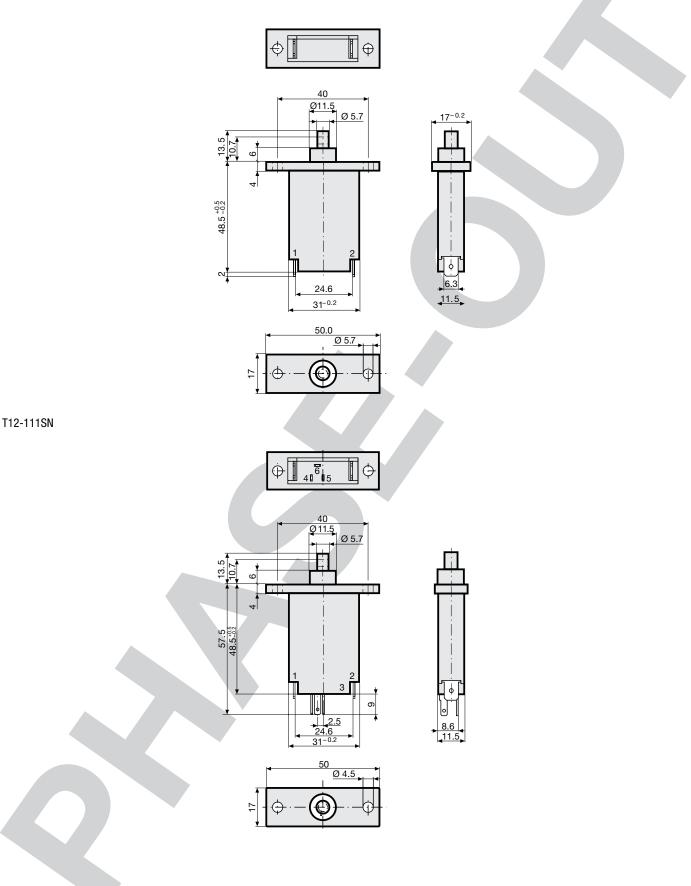

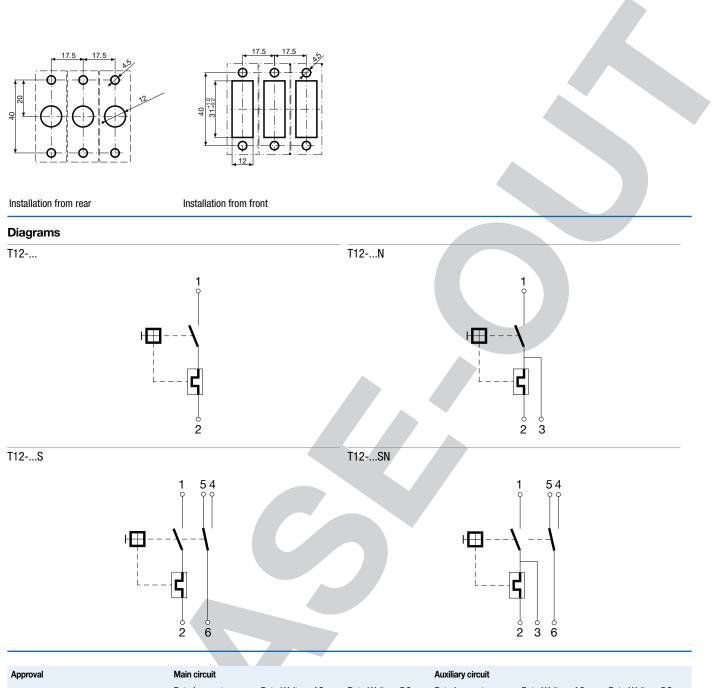

Approval	Main circuit			Auxiliary circuit		
	Rated current	Rated Voltage AC	Rated Voltage DC	Rated current	Rated Voltage AC	Rated Voltage DC
UL 1077 CSA C22.2 No. 235	0.0515 A	240 V	28 V	2 A 3 A	120 V -	- 28 V
CSA C22.2 No. 235	0.316 A	240 V	28 V	1 A	240 V	-
IEC 60934	0.0516 A	240 V	28 V	1 A	240 V	28 V
GB 17701	0.0516 A	240 V	28 V	1 A	240 V	28 V

Typical internal resistance per pole

Typical internal res	stance per pole
Rated Current [A]	Internal Resistance [Ω]
0.05	225.000
0.50	3.300
1.00	0.880
2.00	0.267
3.00	0.128
4.00	0.073
5.00	0.040
6.00	0.031
7.00	0.018
8.00	0.018
9.00	0.010
10.00	0.0087
11.00	0.0087
12.00	0.0087
13.00	0.0087
14.00	0.0070
15.00	0.0070
16.00	0.0055

Effect of ambient temperature


The units are calibrated for an ambient temperature of +23°C. To determine the rated current for a lower or higher ambient temperature, use a correction factor (typical value) from the table below:

Ambient Temperature [°C]	Correction factor	
-5	0.87	
0	0.90	
10	0.95	
23	1.00	
30	1.05	
40	1.12	
50	1.20	
60	1.30	

Example: Rated current = 5 A, Environmental temperature = 50 °C, --> Correction factor = 1.2, Resulting current = 6.0 A

T12-121

Time-Current-Curves

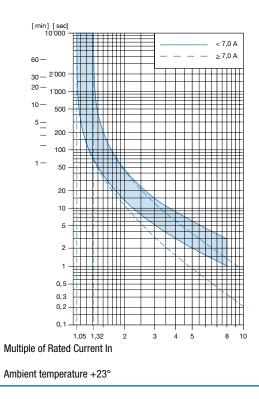

Config. Code

Time in Seconds

T12 - 1 2 3 A B C - 1.23

The characters are placeholders for the correspondingly keys of selections from the key tables.

T12 -	1	23	ΑB	С-	1.23	= Mounting
-------	---	----	----	----	------	------------

Mounting	Configuration key	Settir
Screwflange mounting	1	T12
T12 - 1 2 3 A B C - 1.23 = Actuation Type		Rate
Actuation Type	Configuration key	0.05
		0.1 A
Manual ON/OFF (push/push)	2	0.15
T12 - 1 2 3 A B C - 1.23 = Terminal		0.2 A
		0.3 A
Terminal	Configuration key	0.4 A
Quick connect terminal 6.3x0.8mm	1	0.5 A
		0.6 A
T12 - 1 2 3 A B C - 1.23 = Auxiliary contact		0.7 A
		0.8 A
Auxiliary contact	Configuration key	0.9 A
Auxiliary contact	S	1.0
		1.1 A
T12 - 1 2 3 A B C - 1.23 = Shunt terminal		1.2 A
Shunt terminal	Configuration	1.3 A
Shart terminar	key	1.4 A
Shunt terminal	Ν	1.5 A
		1.6 A
T12 - 1 2 3 A B C - 1.23 = Setting indication		1.7 A

Configuration key
R

12 - 1 2 3 A B C - **1.23 = Rated current**

Rated current	Configuration key
0.05 A	0.05
0.1 A	0.1
0.15 A	0.15
0.2 A	0.2
0.3 A	0.3
0.4 A	0.4
0.5 A	0.5
0.6 A	0.6
0.7 A	0.7
0.8 A	0.8
0.9 A	0.9
1.0	1
1.1 A	1.1
1.2 A	1.2
1.3 A	1.3
1.4 A	1.4
1.5 A	1.5
1.6 A	1.6
1.7 A	1.7

Other rated currents on request

T12-121

Rated current	Configuration key	Rated current	Configuration key
1.8 A	1.8	6.5 A	6.5
1.9 A	1.9	7.0 A	7
2.0 A	2	7.5 A	7.5
2.1 A	2.1	8.0 A	8
2.3 A	2.3	8.5 A	8.5
2.5 A	2.5	9.0 A	9
2.8 A	2.8	9.5 A	9.5
3.0 A	3	10.0 A	10
3.3 A	3.3	11.0 A	11
3.5 A	3.5	12.0 A	12
4.0 A	4	13.0 A	13
4.5 A	4.5	14.0 A	14
5.0 A	5	15.0 A	15
5.5 A	5.5	16.0 A	16
6.0	6	Other rated currents on request	
Other rated currents on request			

Variants

Rated Current [A]		Construction variants		Config. Code	Order Number
	Auxiliary contact	Shunt terminal	Setting indication		
1.8	•			T12-121S-1.8	4410.0814
3	•	•		T12-121SN-3	4410.0525

Availability for all products can be searched real-time: https://www.schurter.com/en/info-center/support-tools/stock-check-distributors

Packaging Unit

20 Pcs

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Schurter:

4410.0525