
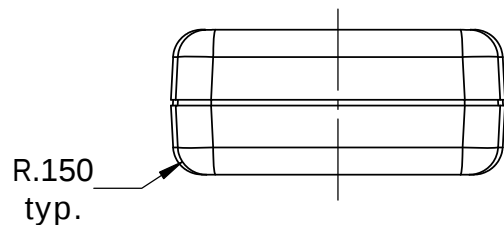


SERPAC CH6

Electronic Enclosures


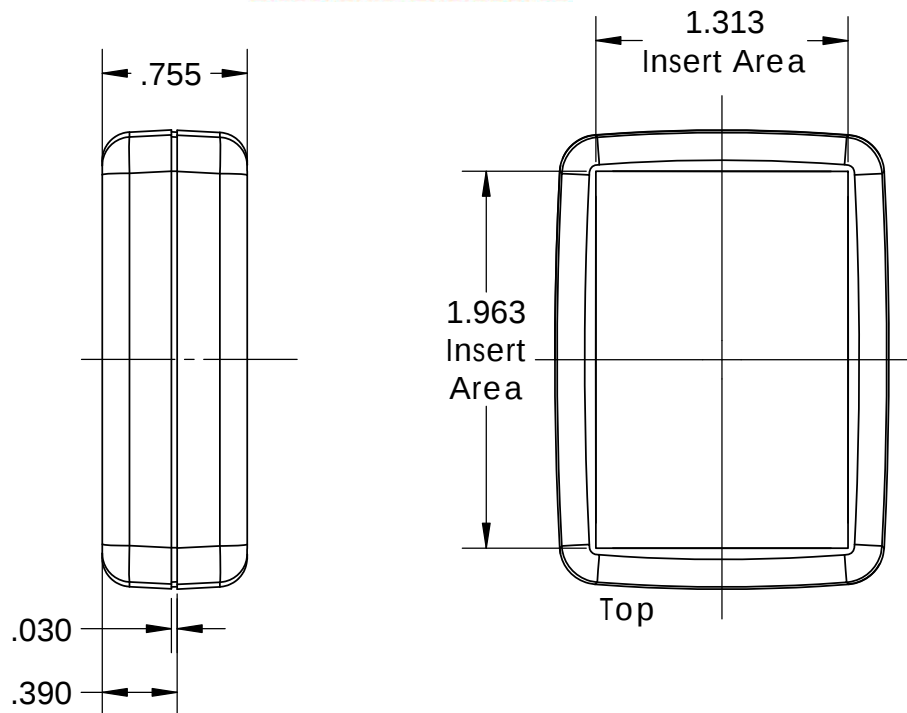


Enclosure can hold either a 0.032" PCB or a 0.063" PCB
 PCB dimensions are: (PCB drawings on page 2)
 0.032" [.8mm] PCB 2.16" X 1.52" (0.20" center hole)
 0.063" [1.6mm] PCB 2.12" X 1.48" (0.26" center hole)

PART NO.	DESCRIPTION	ACCESSORIES	
1103	CH6 TOP	PART NO. 55	DESCRIPTION
1104	CH6 BOTTOM		KEY HOLDER
6007	SCREW 2x3/4" PHILFLAT H/L (1)		

NOTES:

1) When machine or I-plates modifications are required, use the center of the enclosure to dimension.

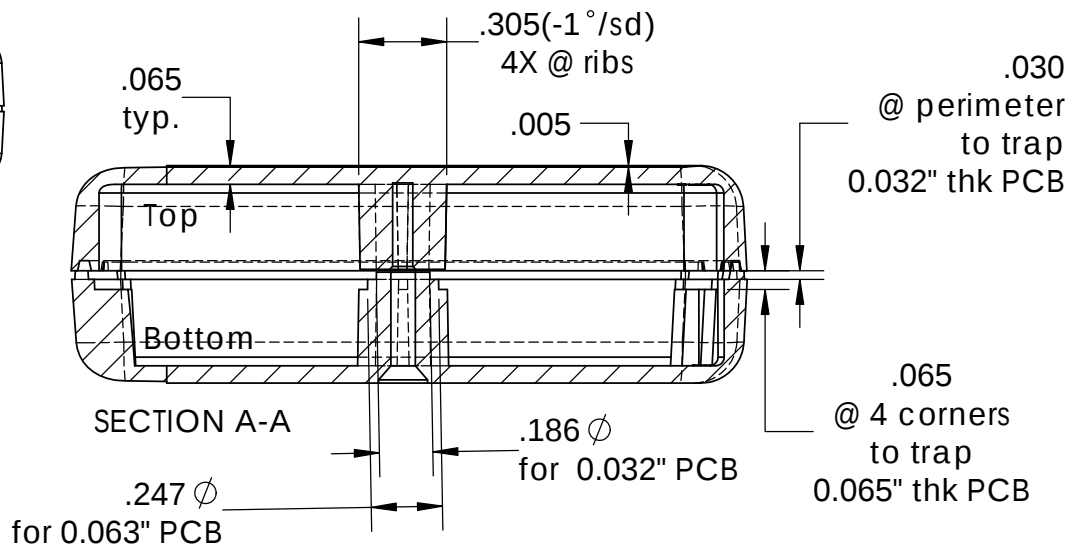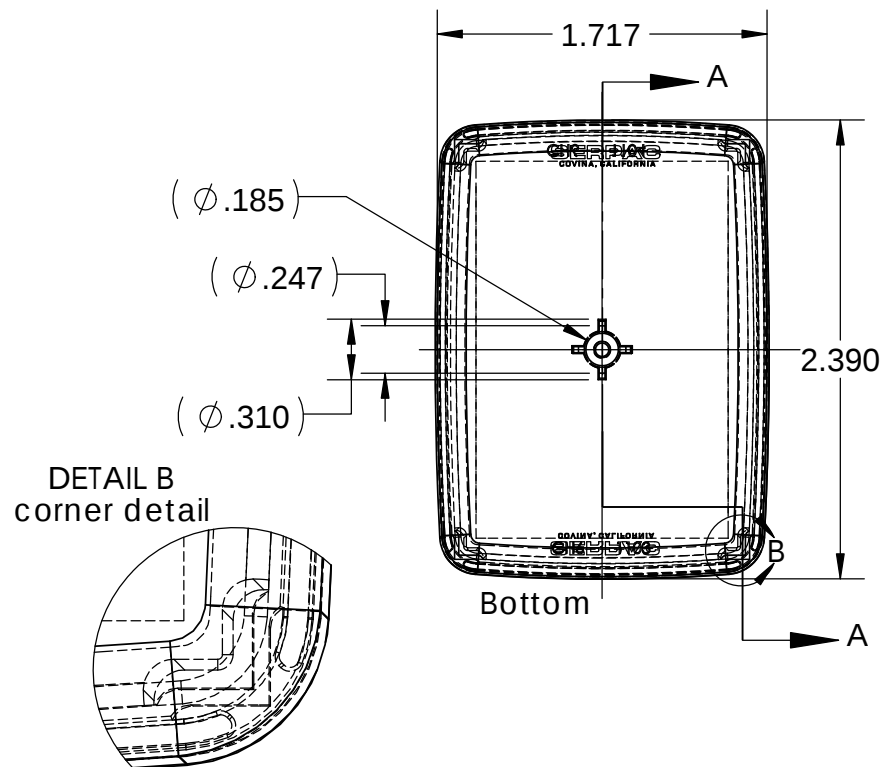


ALL DIMENSIONS ARE $\pm .010"$ 7/19/12
 2009 Wright Ave., La Verne, CA 91750


Ph. (626) 331-0517 Fx. (626) 331-8584 www.serpac.com

SERPAC CIRCUIT BOARD CH6

Electronic Enclosures

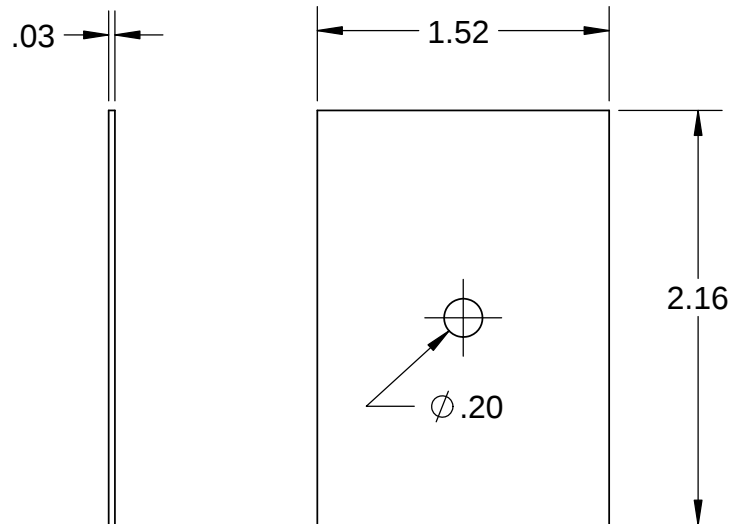

.032 board

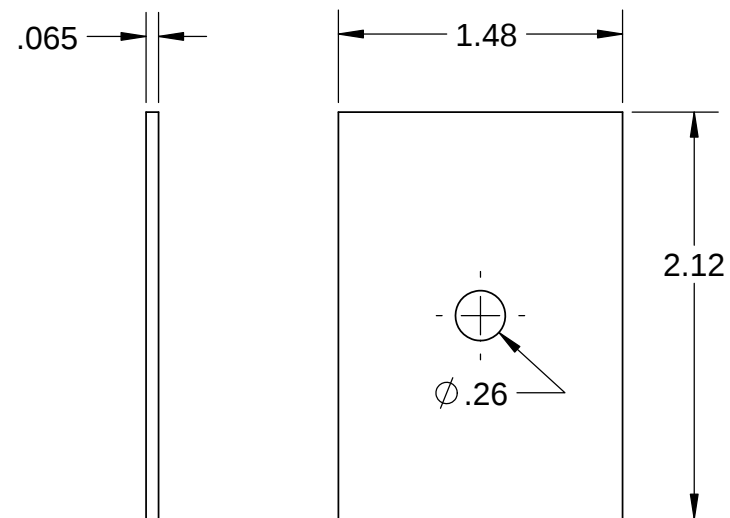

.065 board

NOTES:

These are suggested dimensions.

Plastic parts have a ± 0.010 " manufacturing tolerance.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

SERPAC:

CH-6-B CH-6-G