

8D Series Power Contacts



Power Supply in Harsh Environments

Contacts designed to be used in severe environments. Resistant to fluids, high shock and vibration.


A wide range ■ All shell materials and platings: from composite to stainless steel.
Hermetic version available.

Contact performance ■ High current: 20% more intensity compared to standard contacts.
#4 contact: 80A typical, #8 contact: 45A typical.
High vibration and temperature level.

Large choice of layouts ■ 7 layouts with only #4 or only #8 contacts.
12 mixed layouts available with power contacts.

User friendly ■ Easy maintenance with removable contacts.
Bus bar termination available.



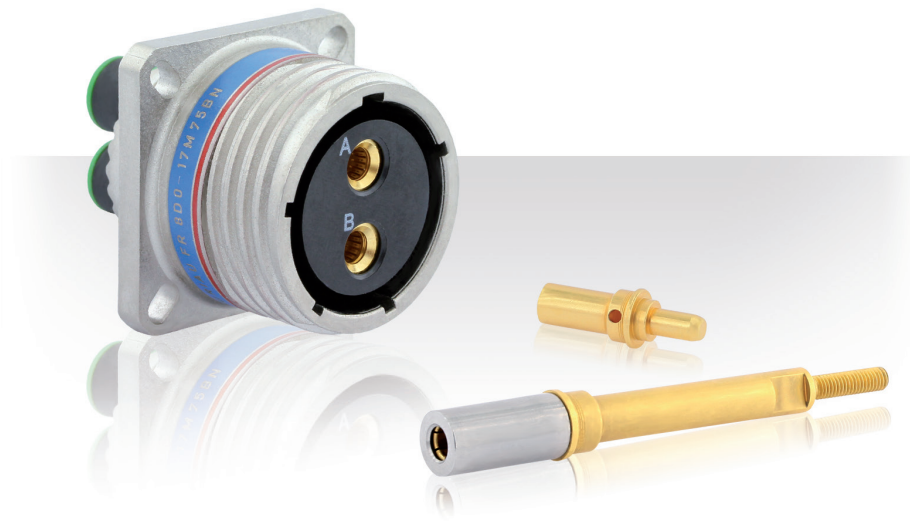

Description

- Quick screw coupling connector with removable crimp contact
- Shell available in aluminum, composite, Stainless steel, Titanium & Bronze
- Six layouts with different current rating
- Consult us for power hermetic version
- High Power offer available on demand
- Derating curves available for #4 and #8.

Technical features

Mechanical

- **Shell:** Aluminum alloy, Composite, Bronze, Stainless steel, Titanium
- **Plating:**
 - . Olive green cadmium (W/J)
 - . Nickel (F/M/TF/S)
 - . Without plating (X for composite, TT for titanium and JVS for Bronze)
 - . Passivated (K)
- **Grommet and seal:** Silicon elastomer
- **Insulator:** Thermoset
- **Contact body:** Copper Alloy
- **Contact retention:**
 - . #4 = 200N
 - . #8 = 111N
- **Shock:** 300g during 3ms
- **Endurance:** 500 mating / unmating operations
- **Vibration:** As per MIL DTL 38999

Electrical

- **Dielectric withstanding:** Test voltage rating (Vrms)

Service	Sea level	at 21 000 m
M	1 300	800
I	1 800	1 000

- **Insulation Resistance:** 5000 MΩ under 500 Vdc
- **Max current rating per contact:**
 - . #4 = 80A
 - . #8 = 45A
- **Contact resistance:**
 - . #4 = 2mΩ
 - . #8 = 3mΩ
- **Shielding:** As per MIL DTL 38999
- **Shell continuity:**
 - . W = 2.5 mΩ
 - . F = 1mΩ
 - . J, M = 3 mΩ
 - . JVS = 5 mΩ

Environmental

- **Temperature range:**
 - . W, J, X, JVS = - 65°C +175°C
 - . F, M, K, S, TT, TF = - 65°C +200°C
- **Sealing:** As per MIL DTL 38999
- **Damp Heat:** As per MIL DTL 38999
- **Salt Spray:**
 - . W, TT, TF, K, JVS = 500 hours
 - . F, S = 48 hours
 - . J,M,X = 2000 hours
- **Fire resistance:** As per EN 2591 - C 17 method A
- **Resistance to fluid:** As per MIL DTL 38999

Connector part numbers





Aluminum, Composite, Stainless steel & Titanium connector

Basic Series	8D	0	-	11	W	80	P	N	251
Style: 0: Square flange receptacle 5: Plug with RFI shielding 7: Jam nut receptacle									
Type: Crimp contact									
Shell size: 11 - 17 - 19 - 21 - 23 - 25									
Plating: Aluminum shell: W: Olive drab cadmium F: Nickel ZC: Green zinc cobalt Z: Black zinc nickel Composite shell: J: Olive green cadmium M: Nickel X: Without plating Stainless steel shell: K: Corrosion resistant S: Nickel Titanium shell: TT: Without plating TF: Nickel									
Contact layouts: See next page									
Contact style: P: Pin contact A: Male connector supplied without contact S: Socket contact B: Female connector supplied without contact									
Orientation: N - A - B - C - D - E									
Specification: 251: Mandatory for some layouts supplied with power contacts (see next page)									

Bronze connector

Basic Series	JVS	16	A	11	80	P	N	251
Style: 00: Square flange receptacle 07: Jam nut receptacle 16: Plug								
Material: A: Bronze shell material								
Shell size: 11 - 17 - 19 - 21 - 23 - 25								
Contact layouts: See next page								
Contact style: P: Pin contact A: Male connector supplied without contact S: Socket contact B: Female connector supplied without contact								
Orientation: N - A - B - C - D - E								
Specification: 251: Mandatory for some layouts supplied with power contacts (see next page)								

Contact layouts

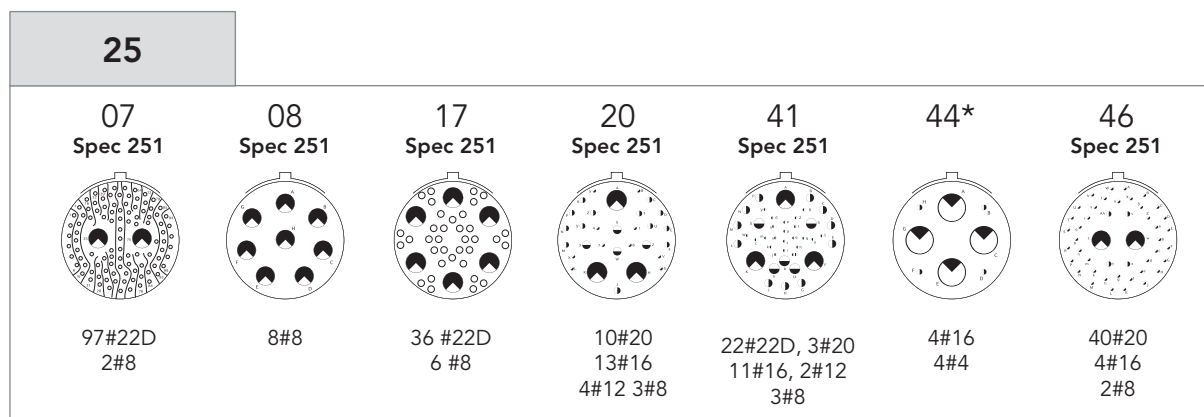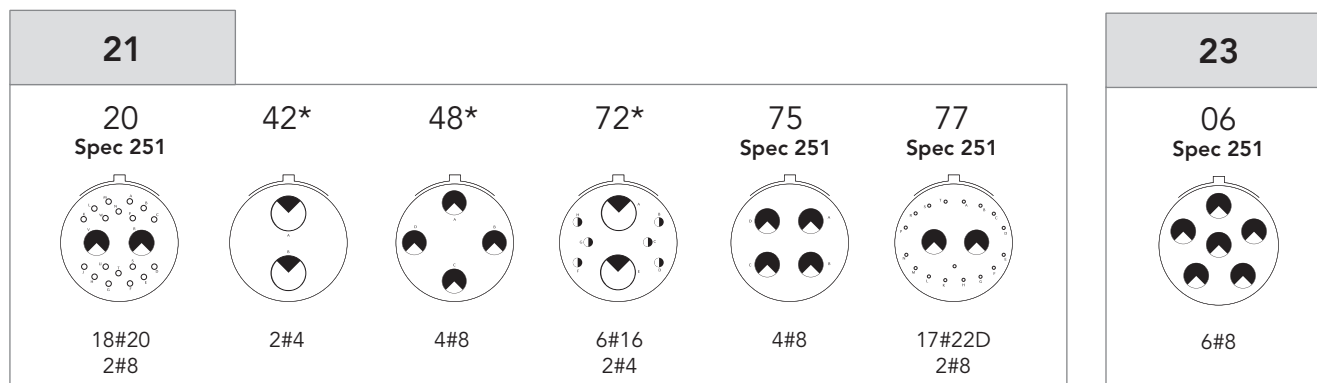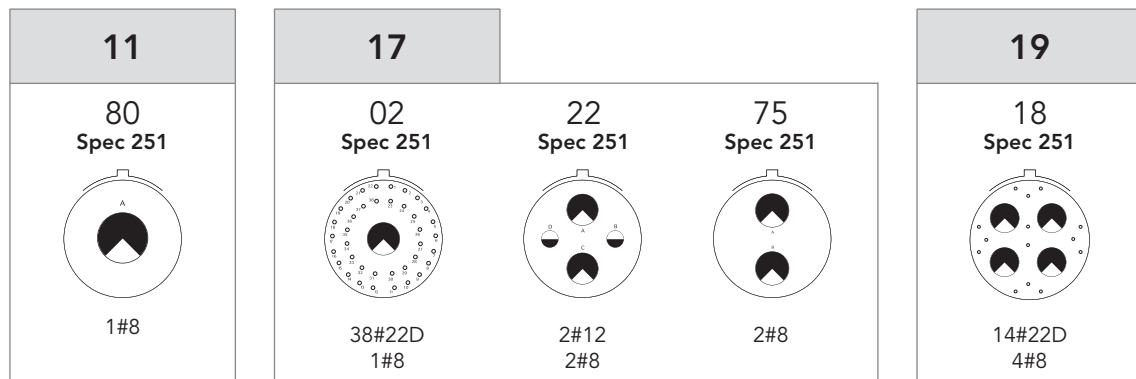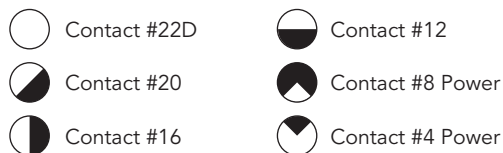

* Power contacts on standard, no spec. 251 needed.


Power contacts

Contact size	Contact type	Part number	Reducer	Cable size max.		Boot
				AWG	mm ²	
#4	Male	85997598900*	Without	N/A	25 mm ²	N/A not sealed
	Female	85997599900*				
	Male	85997534		AWG 4	16 to 21 mm ²	85994594 for cable 16mm ²
	Female	85997535				
	Male	85997524		AWG8	9 mm ²	N/A not sealed
	Female	85997525				
	Male	85997534	84002352A	AWG6	10 mm ²	85994593
	Female	85997535				
	Male	85997528900	Without	AWG6	10 mm ²	
	Female	85997529900				
#8	Male	85997580	Without	AWG8	9 mm ²	85994542
	Female	85997581				
	Male	85997580	85997645	AWG10	6 mm ²	85994547
	Female	85997581				
#8 according to EN 3155	Male	85996215900	Without	AWG8	9 mm ²	85994542
	Female	85996217900				
	Male	85996216900		AWG10	6 mm ²	85994547
	Female	85996218900				
#8 JVS only	Male	85997544	Without	AWG8	9 mm ²	85994542
	Female	85997541				
	Male	85997544	85997645	AWG10	6 mm ²	85994547
	Female	85997541				


Cable section AWG	#22	#20	#16	#12	#10	#8	#4
mm ² maxi	0.34	0.6	1.34	3.18	5.8	9	21
mm ² mini	0.095	0.21	0.6	1.91	3.8	5.8	16

* Not included in connector P/N.
Must be ordered separately.

Bus bar contact

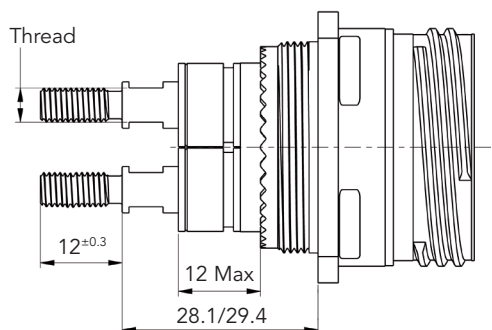

Contact size	Thread	Part number			Lug Ø
		Male	Female	Boots	
#4	M5x0.8	85930873A900	85930875A900	85994594	5.2
#8	M3x0.5	85930872A900	85930874A900	85994542	3.2



Contacts available separately only.
Lug: tin over copper recommended. Dimensions for indication only.

Note: All dimensions are in millimeters (mm)

Power tools

Contact size	Contact type	Contact reference	Cable AWG	Crimping tool			Contact extraction tool (metallic)	Contact extraction tool (plastic)
				Automatic tool: M22520/23-01		Manual hand tool: M300 BT		
				Die set	Locator	Locator		
#4	Male	8599-7534	#4-5 or #10-16mm ²	M22520/23-04	M22520/23-11	N/A	8533-8175	M81969/14-07
	Female	8599-7535						
#8 JVS only	Male	8599-7544	#8 or #10	M22520/23-02	8599-9601	SP 593	8660-197	M81969/14-12
	Female	8599-7541						
#8	Male	8599-7580						
	Female	8599-7581						

Automatic tool for contacts #4 & #8



Crimping tool
M22520/23-01



Die set



Locator

Manual hand tool for contacts #8



Crimping tool
M300 BT



Locator

Extraction tool



Metallic tool

For further information contact us at technical.emear@souriau.com (Europe - Asia - Africa)
technical.americas@souriau.com (North America)
or visit our web site www.souriau.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Souriau:

[8D0C11Z35SN](#) [8D0C13F35SN](#) [8D0C13Z35SN](#) [8D0C17W99PN](#) [8D0L13W35PA](#) [8D111ZC35SA](#) [8D115ZC18SN](#)
[8D121ZC75SN](#) [8D123F54PA](#) [8D123F54SN](#) [8D123W54SN](#) [8D123Z54PN](#) [8D123Z54SN](#) [8D125ZC37SN](#)
[8D509ZC35PA](#) [8D509ZC35SA](#) [8D509ZC98SA](#) [8D511ZC02PA](#) [8D511ZC04PA](#) [8D511ZC35SA](#) [8D511ZC98PA](#)
[8D511ZC98SA](#) [8D513ZC04AA](#) [8D513ZC04PA](#) [8D513ZC04SA](#) [8D513ZC08SA](#) [8D513ZC26PA](#) [8D513ZC26SA](#)
[8D513ZC35PA](#) [8D513ZC35SA](#) [8D513ZC98PA](#) [8D513ZC98SA](#) [8D515ZC18SA](#) [8D515ZC19PA](#) [8D515ZC35AA](#)
[8D515ZC35PA](#) [8D515ZC97PA](#) [8D515ZC97SA](#) [8D517ZC06PA](#) [8D517ZC06SA](#) [8D517ZC08PA](#) [8D517ZC26PA](#)
[8D517ZC26SA](#) [8D517ZC35PA](#) [8D517ZC35SA](#) [8D517ZC99PA](#) [8D517ZC99SA](#) [8D519ZC11PA](#) [8D519ZC11SA](#)
[8D519ZC35AA](#) [8D519ZC35PA](#) [8D523F54AN](#) [8D523F54BA](#) [8D523F54PA](#) [8D523F54PD](#) [8D523F54SA](#)
[8D523S54SN](#) [8D523W54BA](#) [8D523W54PA](#) [8D523W54SA](#) [8D525Z07PN251](#) [8D723F54AN](#) [8D723F54BB](#)
[8D723F54SB](#) [8D723K54AN](#) [8D723K54PN](#) [8D723K54SN](#) [8D723W54PN](#) [8D723W54SA](#) [8D723W54SB](#)
[8D723Z54AN](#) [8D723Z54PN](#) [8D723Z54SN](#) [8D7C15F18PN](#) [8D7C15Z19PN](#) [8D7C21W41PA](#) [8D7C23W35SA](#)
[8D7C23W35SN](#) [8D7C17W26PN](#)