

25 Series 700


Socket Contact & Pin/Socket Adapter

Shell Size



Solderless Wire Wrap

Spectrum Part Number <i>Select one</i>				EMI Filter	
	L .500	L .375	L .250	Filter Desig.**	Cap. Value
* 56-723	-006	-017	* -012	A	310 pF Pi
56-723	-007	-018	-013	B	1000 pF C
* 56-723	-008	-019	* -014	C	1000 pF Pi
56-723	-009	-020	-015	D	5000 pF C
* 56-723	-010	-021	* -016	E	4000 pF Pi
* 56-723	-032	-029	* -026	F	830 pF C
56-723	-033	-030	-027	J	100 pF Pi
56-723	-034	-031	-028	K	2500 pF Pi
56-723	-048	-047	-046	N	375 pF C

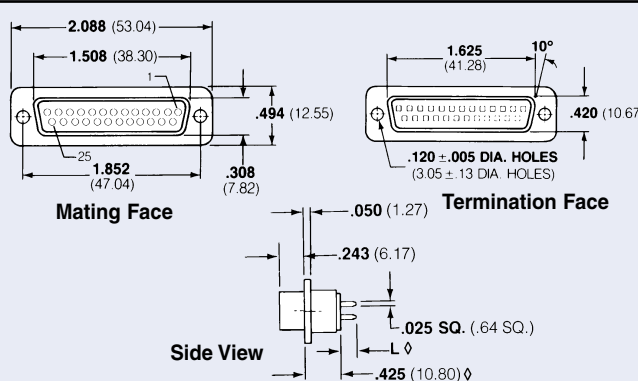


Mating Face

Termination Face

Side View

Solder Cup Termination

Spectrum Part Number	EMI Filter	
	Filter Designation**	Cap. Value
* 56-726-001	A	310 pF Pi
56-726-002	B	1000 pF C
* 56-726-003	C	1000 pF Pi
56-726-004	D	5000 pF C
* 56-726-005	E	4000 pF Pi
56-726-006	F	830 pF C
56-726-007	J	100 pF Pi
* 56-726-008	K	2500 pF Pi
56-726-009	N	375 pF C
56-726-021	L	500 pF C

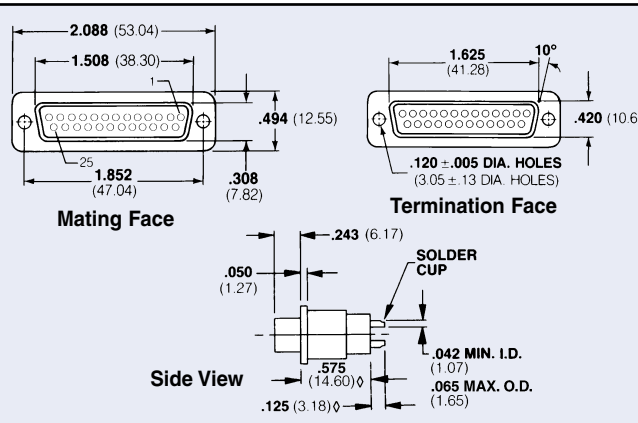


Mating Face

Termination Face

Side View

Pin/Socket Adapter

Spectrum Part Number	EMI Filter	
	Filter Designation**	Cap. Value
* 56-725-001	A	310 pF Pi
56-725-002	B	1000 pF C
* 56-725-003 €	C	1000 pF Pi
56-725-004	D	5000 pF C
* 56-725-005 €	E	4000 pF Pi
* 56-725-019	F	830 pF C
56-725-020	J	100 pF Pi
* 56-725-021	K	2500 pF Pi
56-725-064	N	375 pF C
56-725-073	L	500 pF C

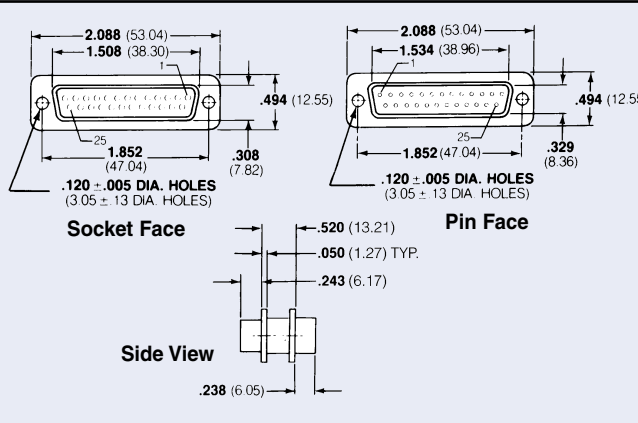

Socket Face

Pin Face

Side View

€ Also available through Spectrum Control's authorized European distributors/agents.

* May be available from distributor stock.

** See page 146 for filter performance.

Standard Tolerance = ±.005 except where noted, φ = ±.015

SPECTRUM CONTROL INC. • 8031 Avonia Rd. • Fairview, PA 16415 • Phone: 814-474-2207 • Fax: 814-474-2208 • Web site: www.spectrumcontrol.com
 SPECTRUM CONTROL GmbH • Hansastrasse 6 • 91126 Schwabach, Germany • Phone: (49)-9122-795-0 • Fax: (49)-9122-795-58

Dimensions in inches (mm)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[API Technologies:](#)

[56-725-005](#) [56-725-019](#) [56-725-021](#)