

CASE FINISH	CURRENT (AMPS)	WORKING VOLTAGE				MAXIMUM DC RESISTANCE (OHMS)	MAXIMUM VOLTAGE DROP		MINIMUM CAPACITANCE (uF)	MIN. INSERTION LOSS PER MIL-STD-220, FULL LOAD, +25°C												
		-55°C TO +85°C		-55°C TO +125°C			DC	AC		14 KHz	30 KHz	50 KHz	75 KHz	100 KHz	150 KHz	300 KHz	500 KHz	1 MHz	10 MHz	100 MHz	1 GHz	10 GHz
		AC	DC	AC	DC																	
GOLD	3	--	--	125 (400Hz)	200	0.05	0.15	--	0.3	--	--	--	--	--	--	19	--	59	80	80	80	--

PART MARKING:


JAN M28861 / 05-021GB
0LSP2 DATE CODE
200VDC 125VAC 400Hz 3A
51-311-380G

PACKAGE MARKING:


STANDARD

MARKING NOTES:

N/A

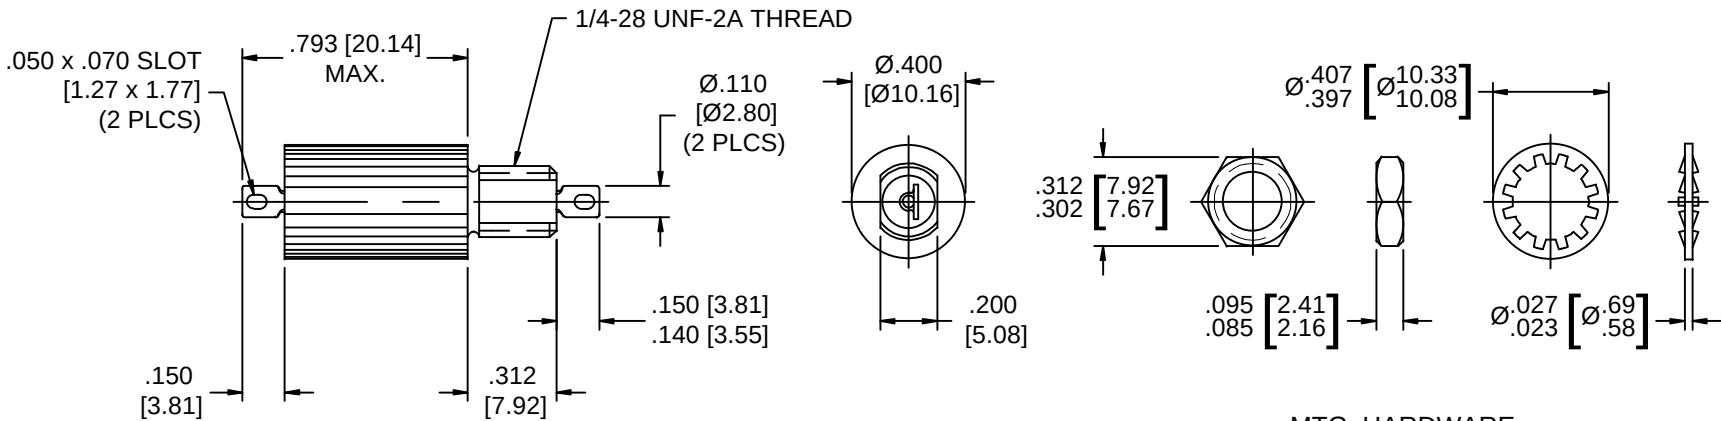

SCHEMATIC



- NOTES:
- 1) MOUNTING TORQUE NOT TO EXCEED 7 in-lbs.
 - 2) THIS PART CODED "NCA". API TECHNOLOGIES DOES NOT HAVE CHANGE AUTHORITY. CUSTOMER APPROVAL REQUIRED BEFORE PRODUCT/PROCESS CHANGES CAN BE MADE.

MTG. HARDWARE

										03	02	01	00	REV. NO.	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MILLIMETERS] DO NOT SCALE	TOLERANCES UNLESS OTHERWISE SPECIFIED Dec. .x ± .x Dec. .xx ± .xx Dec. .xxx ± .010 [.25] Angles ± 0° 30"	api technologies corp. Dwn. Hassett Date 7-3-12 Engr. S.Peters Sheet 1 of 1	FAIRVIEW PENNSYLVANIA Description LOW PASS EMI FILTER 51-311-380G
										CN 57813-ENG	CN 57813-ENG	CN 48508-ENG	CN 37107-ENG	CHANGE NOTICE				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Spectrum Control:](#)

[M28861/05-021GB](#)