


## 100 V, 3 A Schottky rectifier



SMB Flat Notch

### Features

- Negligible switching losses
- High junction temperature capability
- Low leakage current
- Good trade-off between leakage current and forward voltage drop
- Avalanche capability specified
- [ECOPACK2](#) compliant

### Applications

- Switching diode
- Notebook adapter
- LED lighting
- DC/DC converter

### Description

This high voltage Schottky barrier rectifier device is packaged in SMB Flat Notch and designed for high frequency miniature switched mode power supplies and for board DC to DC converters.

#### Product status link

[STPS3H100UFN](#)

#### Product summary

|              |        |
|--------------|--------|
| $I_{F(AV)}$  | 3 A    |
| $V_{RRM}$    | 100 V  |
| $T_J$ (max.) | 175 °C |
| $V_F$ (typ.) | 0.57 V |

# 1 Characteristics

**Table 1. Absolute ratings (limiting values at 25 °C, unless otherwise specified)**

| Symbol      | Parameter   |  | Value       | Unit |
|-------------|---|--|-------------|------|
| $V_{RRM}$   | Repetitive peak reverse voltage                             |  | 100         | V    |
| $I_{F(AV)}$ | Average forward current, $\delta = 0.5$ square wave         | $T_I = 140\text{ °C}$                                    | 3           | A    |
| $I_{FSM}$   | Surge non repetitive forward current                        | $t_p = 10\text{ ms}$ sinusoidal                          | 135         | A    |
| $P_{ARM}$   | Repetitive peak avalanche power                             | $t_p = 10\text{ }\mu\text{s}$ ,<br>$T_j = 125\text{ °C}$ | 170         | W    |
| $T_{stg}$   | Storage temperature range                                   |  | -65 to +175 | °C   |
| $T_j$       | Maximum operating junction temperature range <sup>(1)</sup> |  | -40 to +175 | °C   |

1.  $(dP_{tot}/dT_j) < (1/R_{th(j-a)})$  condition to avoid thermal runaway for a diode on its own heatsink.

**Table 2. Thermal resistance parameter**

| Symbol        | Parameter        | Max. value | Unit |
|---------------|------------------|------------|------|
| $R_{th(j-l)}$ | Junction to lead | 15         | °C/W |

For more information, please refer to the following application note:

- AN5088: Rectifiers thermal management, handling and mounting recommendations

**Table 3. Static electrical characteristics**

| Symbol      | Parameter               | Test conditions       |                    | Min. | Typ. | Max. | Unit          |
|-------------|-------------------------|-----------------------|--------------------|------|------|------|---------------|
| $I_R^{(1)}$ | Reverse leakage current | $T_j = 25\text{ °C}$  | $V_R = V_{RRM}$    | -    |      | 1.5  | $\mu\text{A}$ |
|             |                         | $T_j = 125\text{ °C}$ |                    | -    | 0.6  | 1.7  | mA            |
| $V_F^{(2)}$ | Forward voltage drop    | $T_j = 25\text{ °C}$  | $I_F = 3\text{ A}$ | -    |      | 0.76 | V             |
|             |                         | $T_j = 125\text{ °C}$ |                    | -    | 0.57 | 0.61 |               |
|             |                         | $T_j = 25\text{ °C}$  | $I_F = 6\text{ A}$ | -    |      | 0.84 |               |
|             |                         | $T_j = 125\text{ °C}$ |                    | -    | 0.64 | 0.68 |               |

1. Pulse test:  $t_p = 5\text{ ms}$ ,  $\delta < 2\%$

2. Pulse test:  $t_p = 380\text{ }\mu\text{s}$ ,  $\delta < 2\%$

To evaluate the conduction losses, use the following equation:


$$P = 0.54 \times I_{F(AV)} + 0.023 \times I_F^2(RMS)$$

For more information, please refer to the following application notes related to the power losses :


- AN604: Calculation of conduction losses in a power rectifier
- AN4021: Calculation of reverse losses on a power diode

## 1.1 Characteristics (curves)


**Figure 1. Average forward power dissipation versus average forward current**

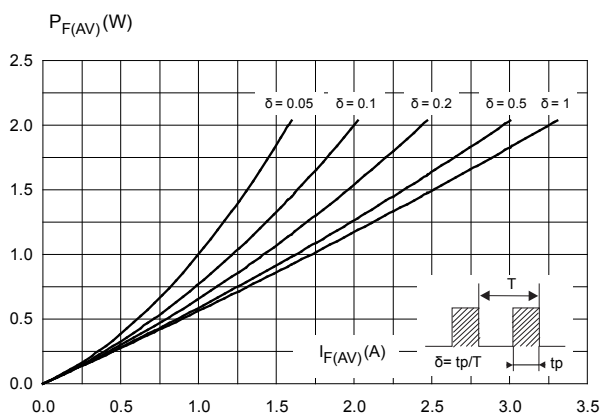


**Figure 2. Average forward current versus lead temperature ( $\delta = 0.5$ )**




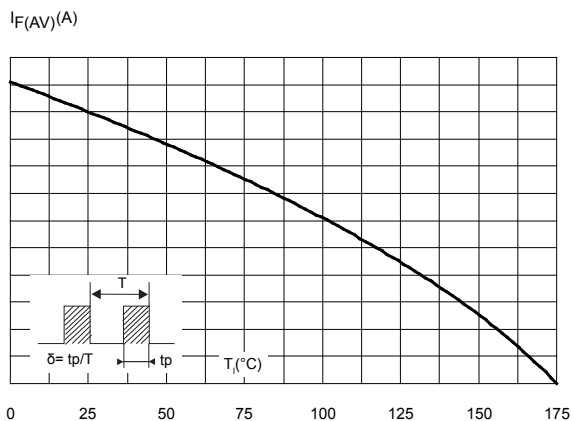


**Figure 3. Normalized avalanche power derating versus pulse duration ( $T_j = 125^\circ\text{C}$ )**

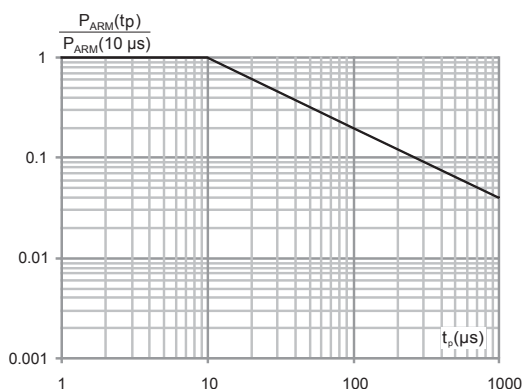

**Figure 4. Relative variation of thermal impedance junction to lead versus pulse duration**

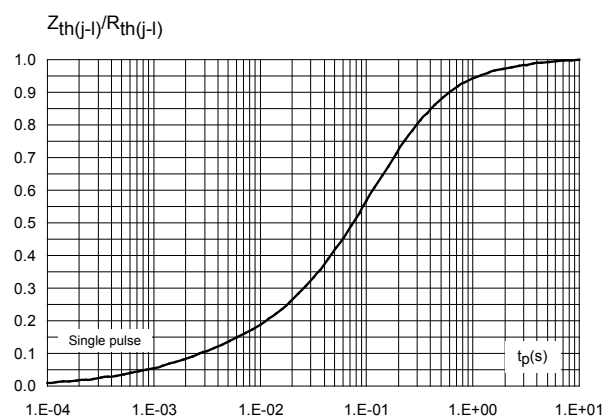

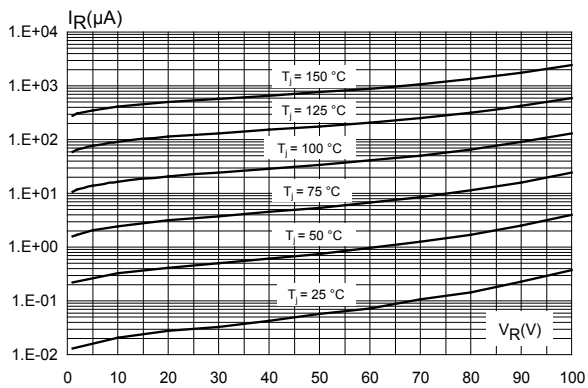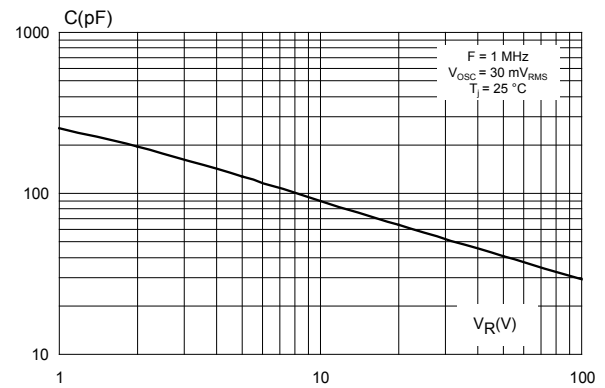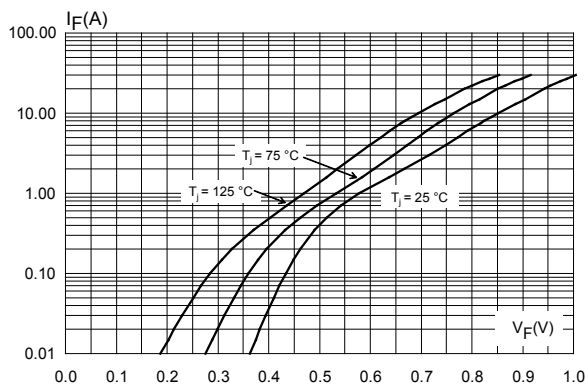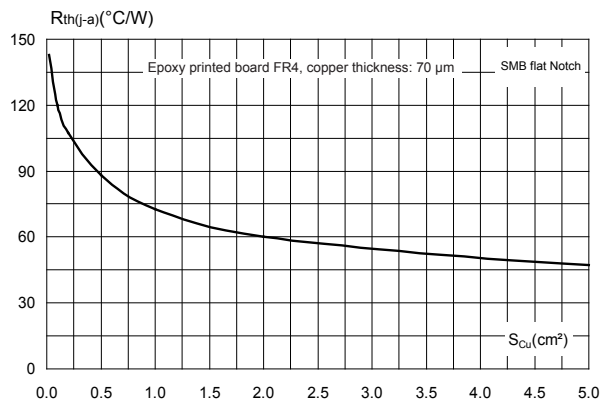**Figure 5. Reverse leakage current versus reverse voltage applied (typical values)**

**Figure 6. Junction capacitance versus reverse voltage applied (typical values)**

**Figure 7. Forward voltage drop versus forward current (typical values)**

**Figure 8. Thermal resistance junction to ambient versus copper surface under each lead (SMB flat Notch)(typical values)**


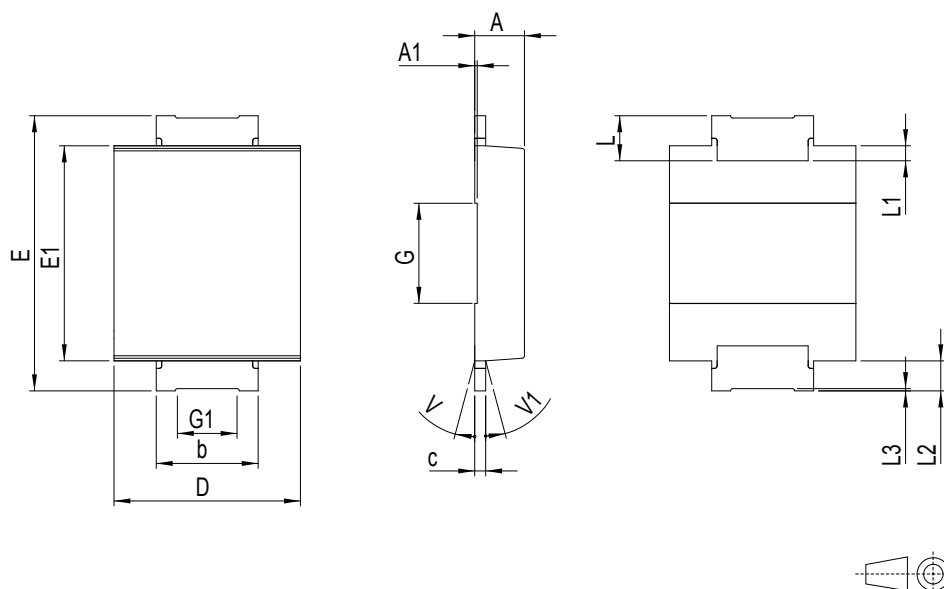
## 2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of **ECOPACK** packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK is an ST trademark.

### 2.1 SMB Flat Notch package information


- Epoxy meets UL94, V0
- Lead-free package

**Figure 9. SMB Flat Notch package outline**



**Table 4. SMB Flat Notch mechanical data**

| Ref. | Dimensions  |      |      |        |       |       |
|------|-------------|------|------|--------|-------|-------|
|      | Millimeters |      |      | Inches |       |       |
|      | Min.        | Typ. | Max. | Min.   | Typ.  | Max.  |
| A    | 0.90        |      | 1.10 | 0.035  |       | 0.043 |
| A1   |             | 0.05 |      |        | 0.002 |       |
| b    | 1.95        |      | 2.20 | 0.077  |       | 0.087 |
| c    | 0.15        |      | 0.40 | 0.006  |       | 0.016 |
| D    | 3.30        |      | 3.95 | 0.130  |       | 0.156 |
| E    | 5.20        |      | 5.60 | 0.205  |       | 0.220 |
| E1   | 4.05        |      | 4.60 | 0.159  |       | 0.181 |
| G    |             | 2.00 |      |        | 0.079 |       |
| G1   |             | 1.20 |      |        | 0.047 |       |
| L    | 0.75        |      | 1.20 | 0.030  |       | 0.047 |
| L1   |             | 0.30 |      |        | 0.012 |       |
| L2   |             | 0.60 |      |        | 0.024 |       |
| L3   | 0.02        |      |      | 0.001  |       |       |
| V    |             |      | 8°   |        |       | 8°    |
| V1   |             |      | 8°   |        |       | 8°    |

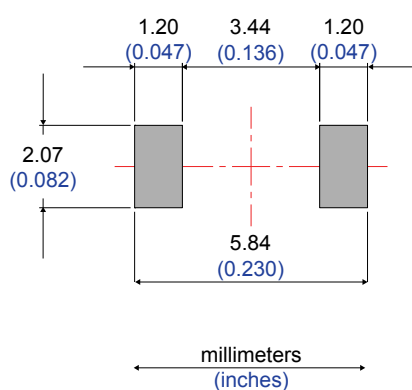**Figure 10. Footprint recommendations, dimensions in mm (inches)**


### 3 Ordering information

**Table 5. Ordering information**

| Order code   | Marking | Package        | Weight | Base qty. | Delivery mode |
|--------------|---------|----------------|--------|-----------|---------------|
| STPS3H100UFN | B31     | SMB Flat Notch | 56 mg  | 5000      | Tape and reel |

## Revision history

**Table 6. Document revision history**

| Date        | Version | Changes          |
|-------------|---------|------------------|
| 31-Jan-2020 | 1       | Initial release. |



**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to [www.st.com/trademarks](http://www.st.com/trademarks). All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2020 STMicroelectronics – All rights reserved

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[STMicroelectronics:](#)

[STPS3H100UFN](#)