



RF Power LDMOS transistor HF up to 1.5 GHz

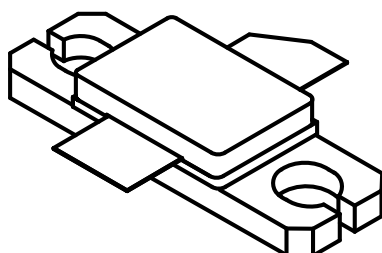

M243
Epoxy sealed



Features

- Excellent thermal stability
- Common source configuration
- Integrated ESD protection – HBM Class 2
- P_{OUT} (@28 V) = 80 W with 17 dB gain / 70% efficiency @945 MHz
- BeO free package
- In compliance with European Directive 2002/95/EC

Description

The ST9060C is a 28/32 V common source N-channel enhancement-mode lateral field-effect RF power transistor designed for broadband commercial, avionics and industrial applications at frequencies up to 1.5 GHz. The device can be used in Class A, AB and C for all typical modulation formats.

GADG310120180952IG

Product status link

[ST9060C](#)

Product summary

Order code	ST9060C
Package	M243
Branding	ST9060C

1 Maximum ratings

($T_{CASE} = 25\text{ °C}$)

Table 1. Absolute maximum ratings

Symbol	Parameter	Value	Unit
$V_{(BR)DSS}$	Drain-source voltage	90	V
V_{GS}	Gate-source voltage	-10 +13	V
I_D	Drain current	12	A
P_{DISS}	Power dissipation (@ $T_C = 70\text{ °C}$)	170	W
T_J	Maximum operating junction temperature	200	°C
T_{STG}	Storage temperature	-65 to +150	°C

Table 2. Thermal data

Symbol	Parameter	Value	Unit
R_{thJC}	Junction-case thermal resistance	0.75	°C/W

2 Electrical characteristics

(T_{CASE} = 25 °C)

Table 3. Static


Symbol	Test conditions	Min.	Typ.	Max.	Unit
V _{(BR)DSS}	V _{GS} = 0 V, I _{DS} = 10 mA	90	94		V
I _{DSS}	V _{GS} = 0 V, V _{DS} = 28 V			1	μA
I _{GSS}	V _{GS} = 12 V, V _{DS} = 0 V			1	μA
V _{GS(Q)}	V _{DS} = 28 V, I _{DS} = 300 mA	2	2.9	5	V
V _{DS(ON)}	V _{GS} = 10 V, I _{DS} = 3 A		0.74	1.0	V
G _{FS}	V _{DS} = 10 V, I _{DS} = 3 A	3			S
C _{ISS}	V _{GS} = 0 V, V _{DS} = 28 V, f = 1 MHz		73		pF
C _{OSS}	V _{GS} = 0 V, V _{DS} = 28 V, f = 1 MHz		24		pF
C _{RSS}	V _{GS} = 0 V, V _{DS} = 28 V, f = 1 MHz		1.6		pF

Table 4. Dynamic (RF spec @ 945 MHz)

Symbol	Test conditions	Min.	Typ.	Max.	Unit
P _{OUT}	V _{DD} = 28 V, I _{DQ} = 300 mA, P _{IN} = 1.5 W		80	-	W
Gain	V _{DD} = 28 V, I _{DQ} = 300 mA, P _{IN} = 1.5 W		17.3	-	dB
Efficiency	V _{DD} = 28 V, I _{DQ} = 300 mA, P _{IN} = 1.5 W		70	-	%
Load mismatch	V _{DD} = 28 V, I _{DQ} = 300 mA, P _{OUT} = 60 W All phase angles	20:1		-	VSWR

3 Impedance data

Figure 1. Impedance data

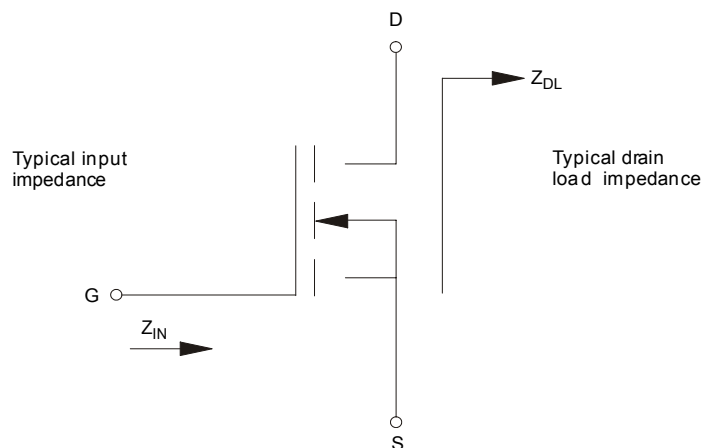

AM09249V1

Table 5. Impedance data

Frequency (MHz)	$Z_{IN}\Omega$	$Z_{DL}\Omega$
100	$1.04 - j 17.7$	$5.2 + j 0.3$
200	$0.97 - j 8.9$	$5.1 + j 0.7$
300	$0.88 - j 5.8$	$4.9 + j 0.9$
400	$0.58 - j 4.3$	$4.6 + j 1.2$
500	$0.76 - j 3.1$	$4.4 + j 1.3$
600	$0.97 - j 2.3$	$4.1 + j 1.4$
700	$0.94 - j 1.8$	$3.8 + j 1.5$
800	$0.88 - j 1.5$	$3.5 + j 1.5$
900	$0.90 - j 1.2$	$3.2 + j 1.5$
1000	$0.90 - j 1.0$	$3.0 + j 1.4$
1100	$0.89 - j 0.7$	$2.7 + j 1.3$
1200	$0.86 - j 0.5$	$2.5 + j 1.2$
1300	$0.85 - j 0.3$	$2.3 + j 1.0$
1400	$0.83 - j 0.2$	$2.1 + j 0.9$
1500	$0.82 + j 0.03$	$2.0 + j 0.7$

4 Typical performance

Figure 2. Power gain and efficiency vs output power and I_{dq} ($V_{DD} = 28\text{ V}$, $f_o = 945\text{ MHz}$)

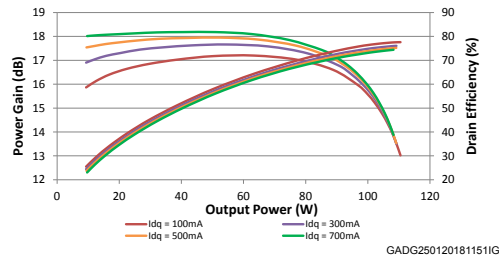


Figure 3. Power gain and efficiency vs output power and V_{DD} ($I_{dq} = 300\text{ mA}$, $f_o = 945\text{ MHz}$ tuned at $V_{DD} = 28\text{ V}$)

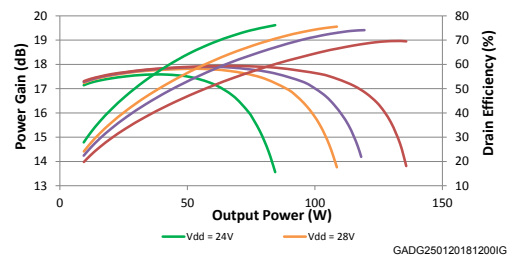


Figure 4. Output power vs V_{DD} and input power ($I_{dq} = 300\text{ mA}$, $f_o = 945\text{ MHz}$ tuned at $V_{DD} = 28\text{ V}$)


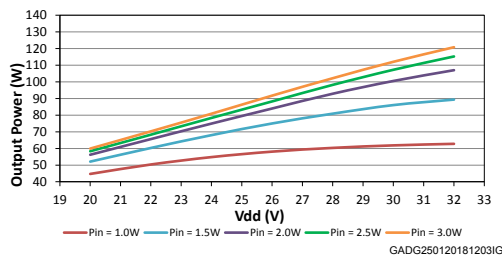


Figure 5. Output power vs V_{GS} and input power ($V_{DD} = 28\text{ V}$, $f_o = 945\text{ MHz}$)

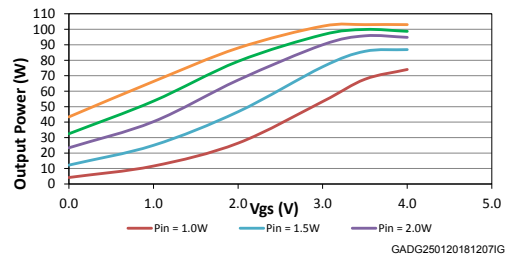

5 Test circuit

Figure 6. Test circuit


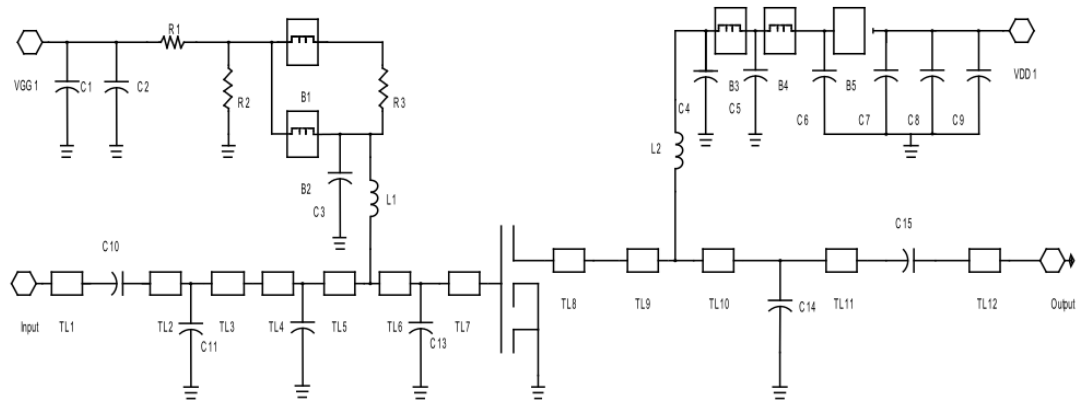


Table 6. ST9060C components list

Item	Quantity	Part number	Vendor	Description
R1, R2	2	CR1206-8W-112JB	VENKEL	1.1 k Ω 1/8 W surface mount chip resistor
R3	1	CR1206-8W-100JB	VENKEL	10 Ω 1/8 W surface mount chip resistor
Coil	2		BELDEN	Inductor 5 turn air wound #20 AWG ID = 0.130 inches (3.3 mm) nylon coated
B1, B2, B3, B4, B5	5	2743021447	Fair-Rite Products	Surface mount EMI shield bead
C1, C7, C8	3	T491D106K035AT	KEMET	10 μ F 35 V tantalum capacitors
C2	1			100 μ F 63 V electrolytic capacitor
C3, C4, C10, C15	4	ATC100B470XXXX	ATC	47 pF chip capacitor
C5, C6	2	ATC200B393MW	ATC	39000 pF chip capacitor
C9	1			330 μ F 50 V electrolytic capacitor
C11, C13, C14	3	27291PC	Johanson Technology	0.8 to 8 pF giga-trim variable capacitor
TL1				L = 1.350 inches [34.29 mm] W = 0.082 inches [02.08 mm]
TL2				L = 0.144 inches [3.65 mm] W = 0.082 inches [02.08 mm]
TL3				L = 0.311 inches [7.91 mm] W = 0.082 inches [02.08 mm]
TL4				L = 0.082 inches [2.09 mm] W = 0.323 inches [08.21 mm]
TL5				L = 0.194 inches [4.94 mm] W = 0.323 inches [08.21 mm]
TL6				L = 0.059 inches [1.49 mm] W = 0.506 inches [12.85 mm]

Item	Quantity	Part number	Vendor	Description
TL7				L = 0.144 inches [3.65 mm] W = 0.506 inches [12.85 mm]
TL8				L = 0.208 inches [5.28 mm] W = 0.506 inches [12.85 mm]
TL9				L = 0.275 inches [6.98 mm] W = 0.323 inches [8.21 mm]
TL10				L = 0.210 inches [5.33 mm] W = 0.082 inches [2.08 mm]
TL11				L = 0.260 inches [6.60 mm] W = 0.082 inches [2.08 mm]
TL12				L = 1.350 inches [34.29 mm] W = 0.082 inches [2.08 mm]
Board 3X5	1		ROGERS	Er = 2.55, t = 0.0026 inches, h = 0.030 inches

Figure 7. Circuit layout

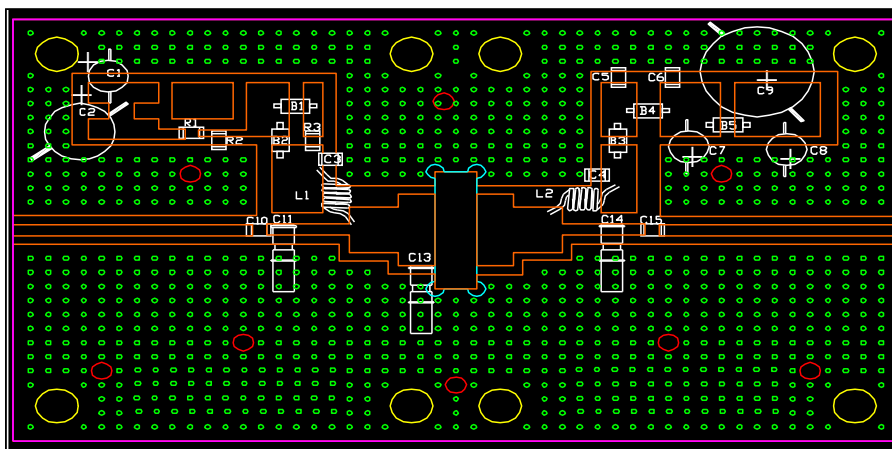

6 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com. ECOPACK® is an ST trademark.

6.1 M243 (.230 x .360 2L N/HERM W/FLG) package information

Figure 8. M243 (.230 x .360 2L N/HERM W/FLG) package outline

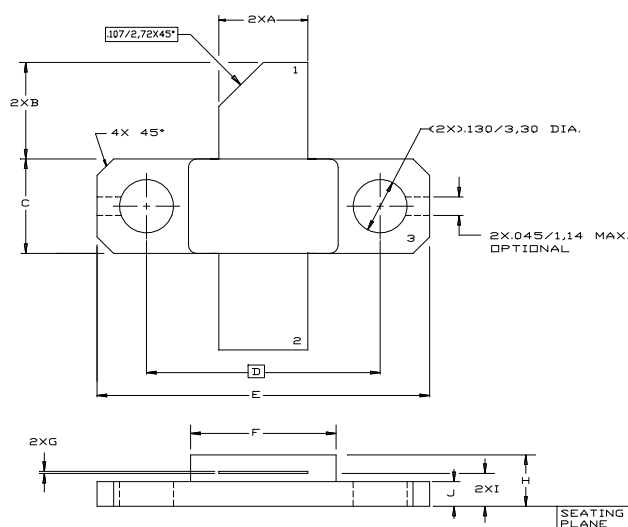



Table 7. M243 (.230 x .360 2L N/HERM W/FLG) package mechanical data

Dim.	mm		
	Min.	Typ.	Max.
A	5.21		5.72
B	5.46		6.48
C	5.59		6.1
D		14.27	
E	20.07		20.57
F	8.89		9.4
G	0.1		0.15
H	3.18		4.45
I	1.83		2.24
J	1.27		1.78

7 Marking, packing and shipping specifications

Table 8. Packing and shipping specifications

Order code	Packing	Pieces per tray	Dry pack humidity	Lot code
ST9060C	Plastic tray	25	< 10%	Two codes max.

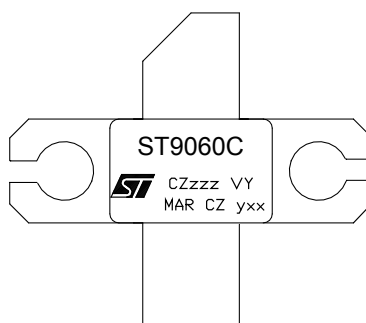Figure 9. Marking layout


GADG250120181223IG

Table 9. Marking specifications

Symbol	Description
CZ	Assembly plant
zzz	Last 3 digits of diffusion lot
VY	Diffusion plant
MAR	Country of origin
CZ	Test and finishing plant
y	Assembly year
xx	Assembly week

Revision history

Table 10. Document revision history

Date	Revision	Changes
02-Feb-2018	1	Initial release
30-Mar-2018	2	Removed maturity status indication from cover page. The document status is production data. Updated Section 7 Marking, packing and shipping specifications . Minor text changes.

Contents

1	Maximum ratings	2
2	Electrical characteristics.....	3
3	Impedance data.....	4
4	Typical performance	5
5	Test circuit	6
6	Package information.....	8
6.1	M243 (.230 x .360 2L N/HERM W/FLG) package information	8
7	Marking, packing and shipping specifications.....	9
	Revision history	10

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2018 STMicroelectronics – All rights reserved

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[STMicroelectronics:](#)

[ST9060C](#)