


## SMALL SIGNAL SCHOTTKY DIODE

### DESCRIPTION

General purpose, metal to silicon diodes featuring very low turn-on voltage and fast switching. These devices have integrated protection against excessive voltage such as electrostatic discharges.

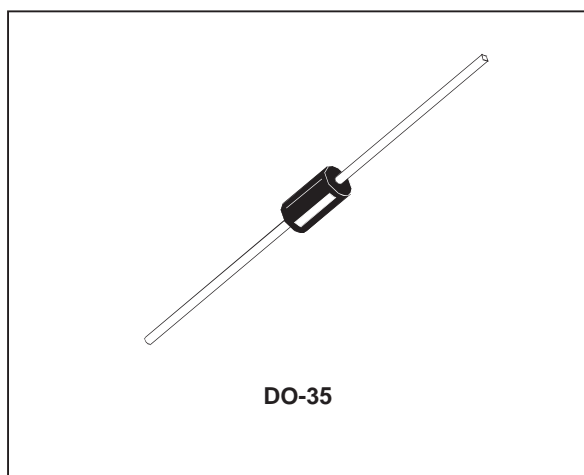

### ABSOLUTE RATINGS (limiting values)

| Symbol                             | Parameter   |                                | BAT47                          | BAT48 | Unit     |
|------------------------------------|---|--------------------------------|--------------------------------|-------|----------|
| V <sub>RRM</sub>                   | Repetitive Peak Reverse Voltage                               |                                | 20                             | 40    | V        |
| I <sub>F</sub>                     | Forward Continuous Current*                                   | T <sub>a</sub> = 25°C          | 350                            |       | mA       |
| I <sub>FRM</sub>                   | Repetitive Peak Fordward Current*                             | t <sub>p</sub> ≤ 1s<br>δ ≤ 0.5 | 1                              |       | A        |
| I <sub>FSM</sub>                   | Surge non Repetitive Forward Current*                         | t <sub>p</sub> = 10ms          | 7.5                            |       | A        |
|                                    |   | t <sub>p</sub> = 1s            | 1.5                            |       |          |
| P <sub>tot</sub>                   | Power Dissipation*  | T <sub>a</sub> = 25°C          | 330                            |       | mW       |
| T <sub>stg</sub><br>T <sub>j</sub> | Storage and Junction Temperature Range                        |                                | - 65 to + 150<br>- 65 to + 125 |       | °C<br>°C |
| T <sub>L</sub>                     | Maximum Temperature for Soldering during 10s at 4mm from Case |                                | 230                            |       | °C       |

### THERMAL RESISTANCE

| Symbol        | Test Conditions   | Value | Unit               |
|---------------|-------------------|-------|--------------------|
| $R_{th(j-l)}$ | Junction-ambient* | 300   | $^\circ\text{C/W}$ |

\* On infinite heatsink with 4mm lead length

**ELECTRICAL CHARACTERISTICS**
**STATIC CHARACTERISTICS**


| Symbol     | Test Conditions                  |              |           | Min. | Typ. | Max. | Unit    |
|------------|----------------------------------|--------------|-----------|------|------|------|---------|
| $V_{(BR)}$ | $I_R = 10\mu A$                  | BAT47        |           | 20   |      |      | V       |
|            | $I_R = 25\mu A$                  | BAT48        |           | 40   |      |      |         |
| $V_F^*$    | $T_j = 25^\circ C$ $I_F = 0.1mA$ | All Types    |           |      |      | 0.25 | V       |
|            | $T_j = 25^\circ C$ $I_F = 1mA$   |              |           |      |      | 0.3  |         |
|            | $T_j = 25^\circ C$ $I_F = 10mA$  |              |           |      |      | 0.4  |         |
|            | $T_j = 25^\circ C$ $I_F = 30mA$  | BAT47        |           |      |      | 0.5  |         |
|            | $T_j = 25^\circ C$ $I_F = 150mA$ |              |           |      |      | 0.8  |         |
|            | $T_j = 25^\circ C$ $I_F = 300mA$ |              |           |      |      | 1    |         |
|            | $T_j = 25^\circ C$ $I_F = 50mA$  | BAT48        |           |      |      | 0.5  |         |
|            | $T_j = 25^\circ C$ $I_F = 200mA$ |              |           |      |      | 0.75 |         |
|            | $T_j = 25^\circ C$ $I_F = 500mA$ |              |           |      |      | 0.9  |         |
| $I_R^*$    | $T_j = 25^\circ C$               | $V_R = 1.5V$ | All Types |      |      | 1    | $\mu A$ |
|            | $T_j = 60^\circ C$               |              |           |      |      | 10   |         |
|            | $T_j = 25^\circ C$               | $V_R = 10V$  | BAT47     |      |      | 4    |         |
|            | $T_j = 60^\circ C$               |              |           |      |      | 20   |         |
|            | $T_j = 25^\circ C$               | $V_R = 20V$  |           |      |      | 10   |         |
|            | $T_j = 60^\circ C$               |              |           |      |      | 30   |         |
|            | $T_j = 25^\circ C$               | $V_R = 10V$  | BAT48     |      |      | 2    |         |
|            | $T_j = 60^\circ C$               |              |           |      |      | 15   |         |
|            | $T_j = 25^\circ C$               | $V_R = 20V$  |           |      |      | 5    |         |
|            | $T_j = 60^\circ C$               |              |           |      |      | 25   |         |
|            | $T_j = 25^\circ C$               | $V_R = 40V$  |           |      |      | 25   |         |
|            | $T_j = 60^\circ C$               |              |           |      |      | 50   |         |

**DYNAMIC CHARACTERISTICS**


| Symbol | Test Conditions               |            | Min. | Typ. | Max. | Unit |
|--------|-------------------------------|------------|------|------|------|------|
| C      | $T_j = 25^\circ C$ $V_R = 0V$ | $f = 1MHz$ |      | 20   |      | pF   |
|        | $T_j = 25^\circ C$ $V_R = 1V$ |            |      | 12   |      |      |

\* Pulse test:  $t_p \leq 300\mu s$   $\delta < 2\%$ .


**Fig. 1:** Forward current versus forward voltage at different temperatures (typical values).

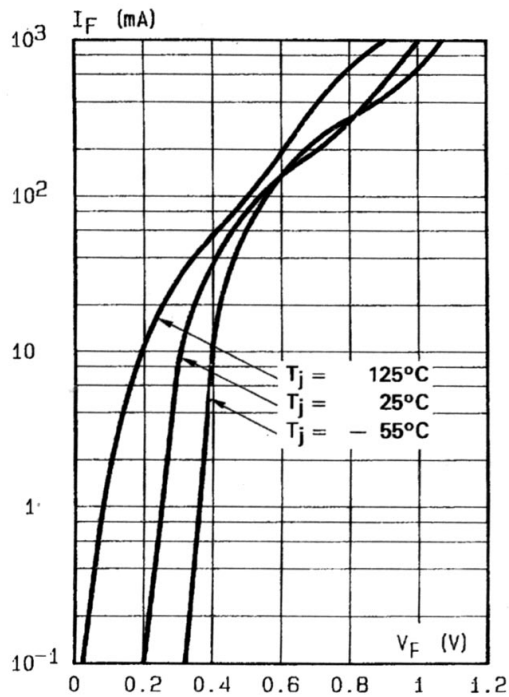


**Fig. 2:** Forward current versus forward voltage (typical values).

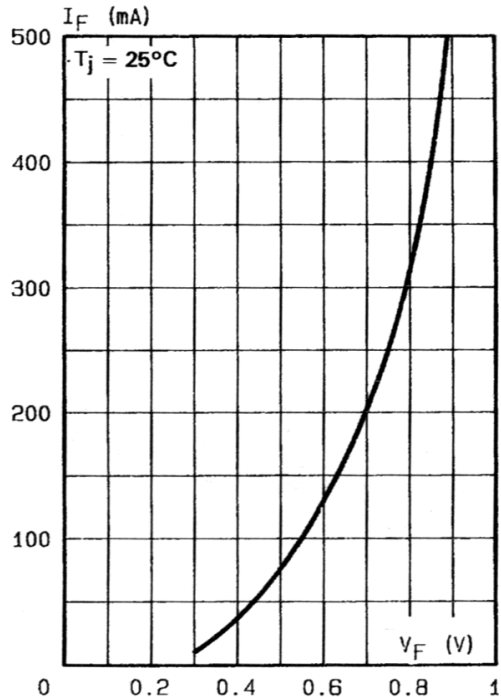


**Fig. 3:** Reverse current versus junction temperature.

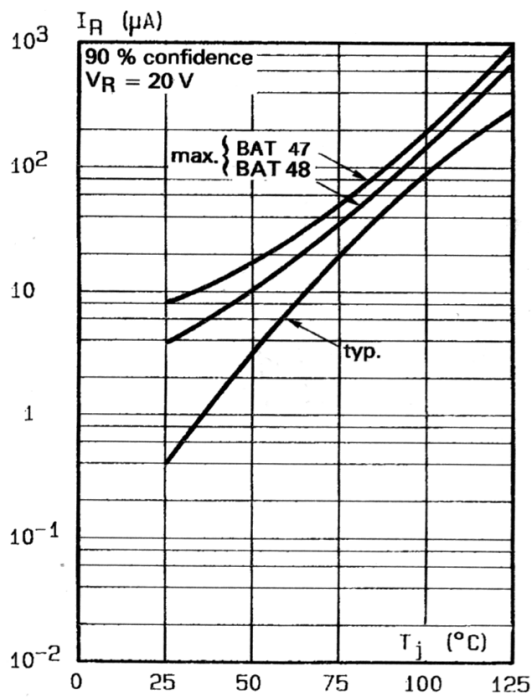

**Fig. 4:** Reverse current versus continuous reverse voltage (typical values).

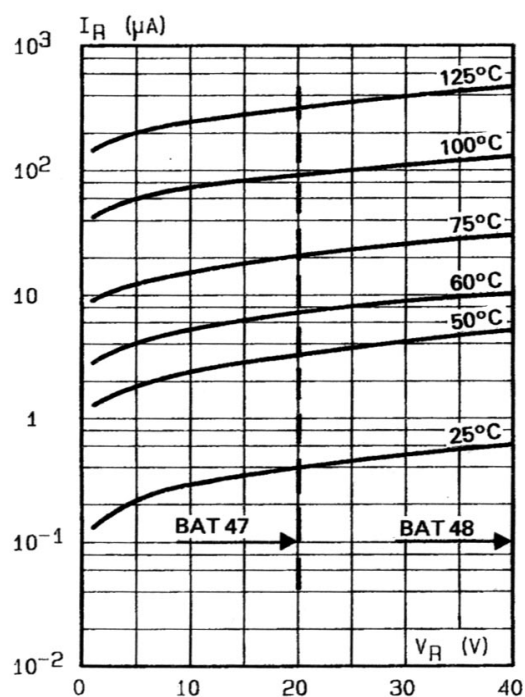

**Fig. 5:** Capacitance  $C$  versus reverse applied voltage  $V_R$  (typical values).

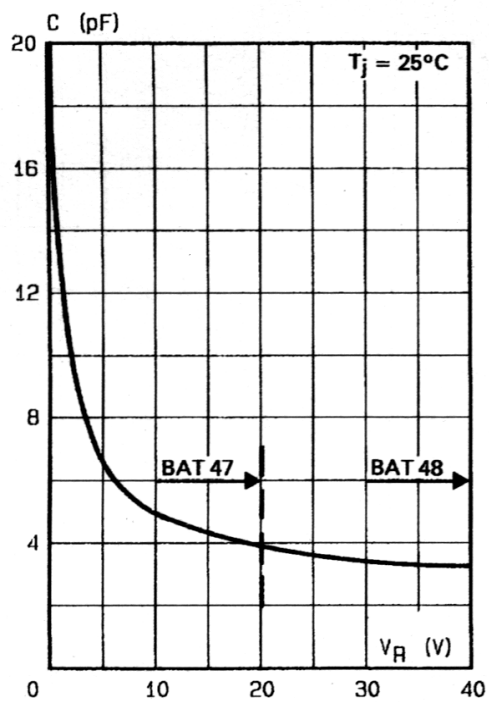

**PACKAGE MECHANICAL DATA**

DO-35

The image shows a mechanical drawing of a DO-35 package. It consists of a side view and a top view. The side view shows a central rectangular body of length A, with two leads of length C extending from either side. The leads have a diameter of ØD. The top view shows the circular body with a diameter of ØB. The drawing uses standard mechanical notation, including dimension lines with arrows and break symbols (//) on the leads.

| REF. | DIMENSIONS  |       |        |       |
|------|-------------|-------|--------|-------|
|      | Millimeters |       | Inches |       |
|      | Min.        | Max.  | Min.   | Max.  |
| A    | 3.05        | 4.50  | 0.120  | 0.177 |
| B    | 1.53        | 2.00  | 0.060  | 0.079 |
| C    | 28.00       |       | 1.102  |       |
| D    | 0.458       | 0.558 | 0.018  | 0.022 |

Cooling method: by convection and conduction.

Marking: clear, ring at cathode end.

Weight: 0.015g

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 2001 STMicroelectronics - Printed in Italy - All rights reserved.

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia

Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - U.S.A.

<http://www.st.com>

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[STMicroelectronics:](#)

[BAT47](#)