



MMBT3906

SMALL SIGNAL PNP TRANSISTOR


PRELIMINARY DATA

Type	Marking
MMBT3906	36

- SILICON EPITAXIAL PLANAR PNP TRANSISTOR
- MINIATURE SOT-23 PLASTIC PACKAGE FOR SURFACE MOUNTING CIRCUITS
- TAPE AND REEL PACKING
- THE NPN COMPLEMENTARY TYPE IS MMBT3904


APPLICATIONS

- WELL SUITABLE FOR PORTABLE EQUIPMENT
- SMALL LOAD SWITCH TRANSISTOR WITH HIGH GAIN AND LOW SATURATION VOLTAGE



SOT-23

INTERNAL SCHEMATIC DIAGRAM



ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage ($I_E = 0$)	-60	V
V_{CEO}	Collector-Emitter Voltage ($I_B = 0$)	-40	V
V_{EBO}	Emitter-Base Voltage ($I_C = 0$)	-6	V
I_C	Collector Current	-200	mA
P_{tot}	Total Dissipation at $T_C = 25\text{ }^{\circ}\text{C}$	350	mW
T_{stg}	Storage Temperature	-65 to 150	$^{\circ}\text{C}$
T_j	Max. Operating Junction Temperature	150	$^{\circ}\text{C}$

MMBT3906

THERMAL DATA

R _{thj-amb} •	Thermal Resistance Junction-Ambient	Max	357.1	°C/W
------------------------	-------------------------------------	-----	-------	------

- Device mounted on a PCB area of 1 cm²


ELECTRICAL CHARACTERISTICS (T_{case} = 25 °C unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I _{CEX}	Collector Cut-off Current (V _{BE} = 3 V)	V _{CE} = -30 V			-50	nA
I _{BEX}	Collector Cut-off Current (V _{BE} = 3 V)	V _{CE} = -30 V			-50	nA
V _{(BR)CEO} *	Collector-Emitter Breakdown Voltage (I _B = 0)	I _C = -1 mA	-40			V
V _{(BR)CBO}	Collector-Base Breakdown Voltage (I _E = 0)	I _C = -10 µA	-60			V
V _{(BR)EBO}	Emitter-Base Breakdown Voltage (I _C = 0)	I _E = -10 µA	-60			V
V _{CE(sat)} *	Collector-Emitter Saturation Voltage	I _C = -10 mA I _B = -1 mA I _C = -50 mA I _B = -5 mA			-0.25 -0.4	V V
V _{BE(sat)} *	Base-Emitter Saturation Voltage	I _C = -10 mA I _B = -1 mA I _C = -50 mA I _B = -5 mA	-0.65		-0.85 -0.95	V V
h _{FE} *	DC Current Gain	I _C = -0.1 mA V _{CE} = -1 V I _C = -1 mA V _{CE} = -1 V I _C = -10 mA V _{CE} = -1 V I _C = -50 mA V _{CE} = -1 V I _C = -100 mA V _{CE} = -1 V	60 80 100 60 30		300	
f _T	Transition Frequency	I _C = -10 mA V _{CE} = -20 V f = 100 MHz	250			MHz
NF	Noise Figure	V _{CE} = -5 V I _C = -0.1 mA f = 10 Hz to 15.7 KHz R _G = 1 KΩ		4		dB
C _{CBO}	Collector-Base Capacitance	I _E = 0 V _{CB} = -5 V f = 100 KHz		6		pF
C _{CEO}	Emitter-Base Capacitance	I _C = 0 V _{EB} = -0.5 V f = 100 KHz		25		pF
t _d	Delay Time	I _C = -10 mA I _B = -1 mA			35	ns
t _r	Rise Time	V _{CC} = -3V			35	ns
t _s	Storage Time	I _C = -10 mA I _{B1} = -I _{B2} = -1 mA			225	ns
t _f	Fall Time	V _{CC} = -3V			72	ns

* Pulsed: Pulse duration = 300 µs, duty cycle ≤ 2 %

SOT-23 MECHANICAL DATA

DIM.	mm			mils		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	0.85		1.1	33.4		43.3
B	0.65		0.95	25.6		37.4
C	1.20		1.4	47.2		55.1
D	2.80		3	110.2		119
E	0.95		1.05	37.4		41.3
F	1.9		2.05	74.8		80.7
G	2.1		2.5	82.6		98.4
H	0.38		0.48	14.9		18.8
L	0.3		0.6	11.8		23.6
M	0		0.1	0		3.9
N	0.3		0.65	11.8		25.6
O	0.09		0.17	3.5		6.7

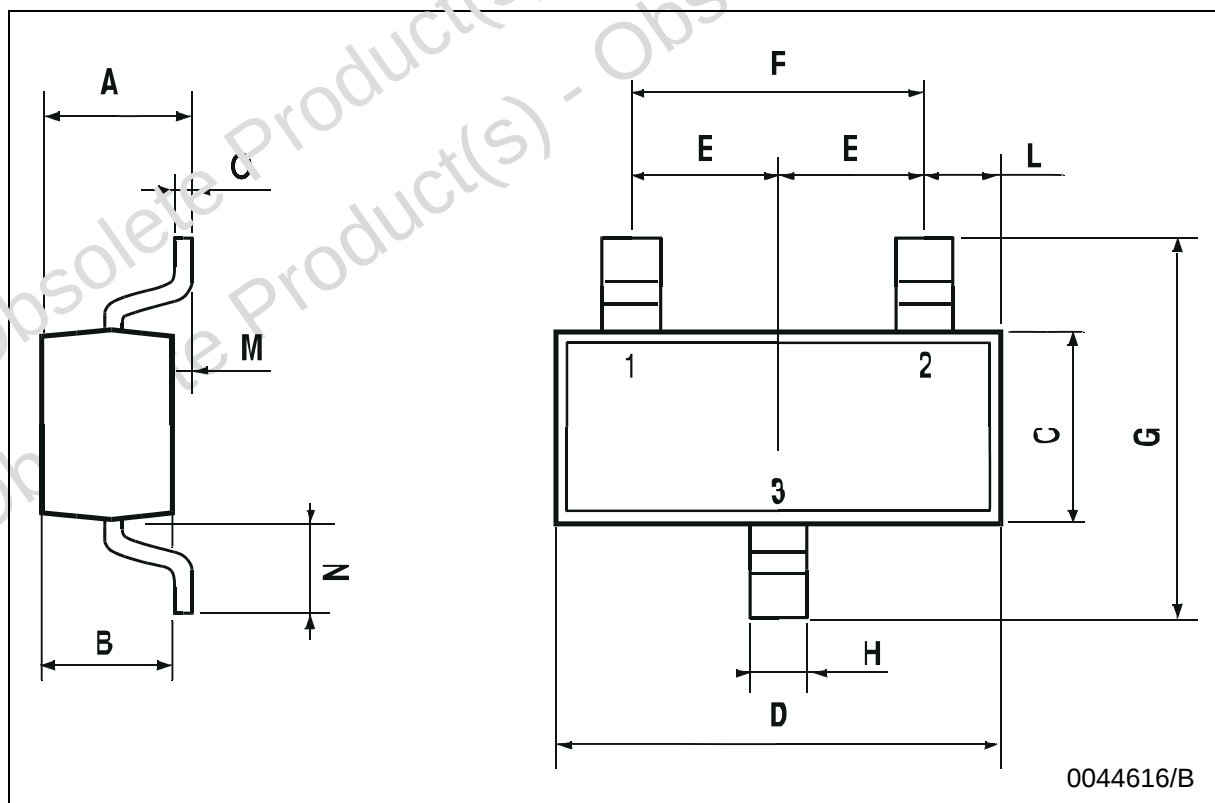

Obsolete Product(s) - Obsolete Product(s)
Obsolete Product(s) - Obsolete Product(s)

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a trademark of STMicroelectronics

© 2002 STMicroelectronics – Printed in Italy – All Rights Reserved

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States.

<http://www.st.com>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[STMicroelectronics:](#)

[MMBT3906](#)