


**BCY59**

SMALL SIGNAL NPN TRANSISTOR


DESCRIPTION

The BCY59 is a silicon Planar Epitaxial NPN transistor in Jedec TO-18 metal case. It is intended for use in audio input stages, driver stages and low-noise input stages.

The PNP complementary type is BCY79.

**TO-18**

INTERNAL SCHEMATIC DIAGRAM



SC06960

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_{CES}	Collector-Emitter Voltage ($V_{BE} = 0$)	45	V
V_{CEO}	Collector-Emitter Voltage ($I_B = 0$)	45	V
V_{EBO}	Emitter-Base Voltage ($I_C = 0$)	7	V
I_C	Collector Current	200	mA
I_B	Base Current	50	mA
P_{tot}	Total Dissipation at $T_{amb} \leq 25\text{ }^{\circ}\text{C}$ at $T_C \leq 25\text{ }^{\circ}\text{C}$	0.39 1	W W
T_{stg}	Storage Temperature	-55 to 175	$^{\circ}\text{C}$
T_j	Max. Operating Junction Temperature	175	$^{\circ}\text{C}$

THERMAL DATA

R _{thj-case}	Thermal Resistance Junction-Case	Max	150	°C/W
R _{thj-amb}	Thermal Resistance Junction-Ambient	Max	384.6	°C/W

ELECTRICAL CHARACTERISTICS (T_{case} = 25 °C unless otherwise specified)


Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I _{CES}	Collector Cut-off Current (V _{BE} = 0)	V _{CE} = 45 V V _{CE} = 45 V T _C = 150 °C		0.1 0.1	10 10	nA μA
I _{CEX}	Collector Cut-off Current (V _{BE} = -0.2 V)	V _{CE} = 45 V T _C = 100 °C			20	μA
I _{EBO}	Emitter Cut-off Current (I _C = 0)	V _{EB} = 5 V			10	nA
V _{(BR)CEO} *	Collector-Emitter Breakdown Voltage (I _B = 0)	I _C = 2 mA	45			V
V _{(BR)EBO}	Emitter-Base Breakdown Voltage (I _C = 0)	I _E = 10 μA	7			V
V _{CE(sat)} *	Collector-Emitter Saturation Voltage	I _C = 10 mA I _B = 0.25 mA I _C = 100 mA I _B = 2.5 mA		0.12 0.4	0.35 0.7	V V
V _{BE(sat)} *	Base-Emitter Saturation Voltage	I _C = 10 mA I _B = 0.25 mA I _C = 100 mA I _B = 2.5 mA	0.6 0.75	0.7 0.9	0.85 1.2	V V
V _{BE(on)} *	Base-Emitter (on) Voltage	I _C = 2 mA V _{CE} = 5 V I _C = 100 mA V _{CE} = 1 V	0.55	0.65 0.75	0.7	V V
h _{FE} *	DC Current Gain	I _C = 10 μA V _{CE} = 5 V Gr. VIII Gr. IX Gr. X I _C = 2 mA V _{CE} = 5 V Gr. VIII Gr. IX Gr. X I _C = 10 mA V _{CE} = 1 V Gr. VIII Gr. IX Gr. X I _C = 100 mA V _{CE} = 1 V Gr. VIII Gr. IX Gr. X	20 40 100 180 250 380 120 160 240 45 60 60	140 195 280 250 350 500 260 365 520	310 460 630	
h _{fe} *	Small Signal Current Gain	I _C = 2 mA V _{CE} = 5 V f = 1 KHz Gr. VIII Gr. IX Gr. X	175 250 350	350 500 700		
f _T	Transition Frequency	I _C = 10 mA V _{CE} = 5 V f = 100 MHz		200		MHz

* Pulsed: Pulse duration = 300 μs, duty cycle ≤ 1 %


ELECTRICAL CHARACTERISTICS (T_{case} = 25 °C unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
C _{CBO}	Collector-Base Capacitance	I _E = 0 V _{CB} = 10 V f = 1MHz		3.5	6	pF
C _{EBO}	Emitter-Base Capacitance	I _C = 0 V _{EB} = 0.5 V f = 1MHz		11	15	pF
NF	Noise Figure	I _C = 0.2 mA V _{CE} = 5 V f = 1KHz R _g = 2KΩ Δf = 200Hz		2	6	dB
t _{on}	Turn-on Time	I _C = 10 mA V _{CC} = 10 V I _{B1} = 1 mA I _C = 100 mA V _{CC} = 10 V I _{B1} = 10 mA		85 55	150 150	ns ns
t _{off}	Turn-off Time	I _C = 10 mA V _{CC} = 10 V I _{B1} = - I _{B2} = 1 mA I _C = 100 mA V _{CC} = 10 V I _{B1} = - I _{B2} = 10 mA		480 480	800 800	ns ns


DC Current Gain

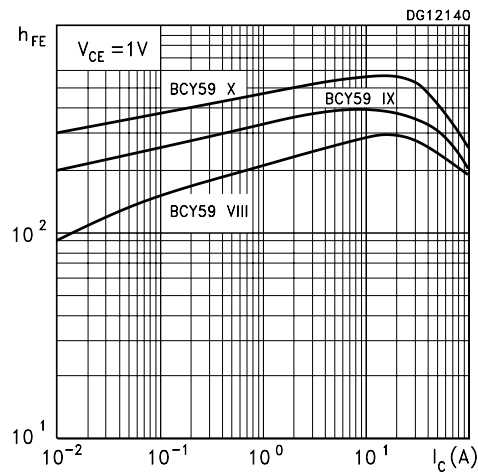


Collector-Emitter Saturation Voltage

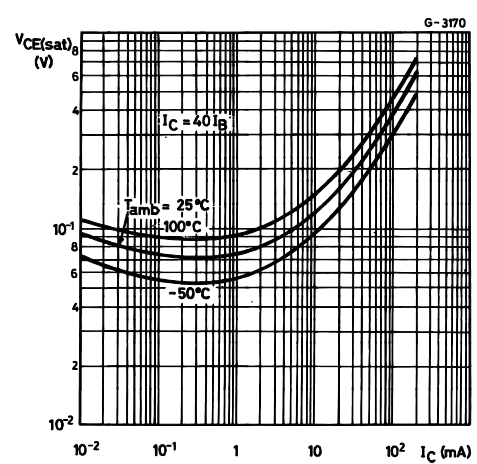


Transition Frequency

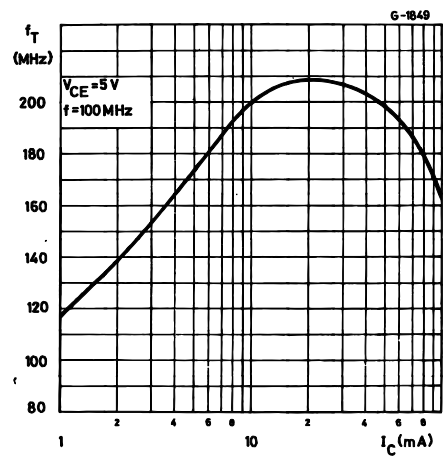


Collector-Base Capacitance

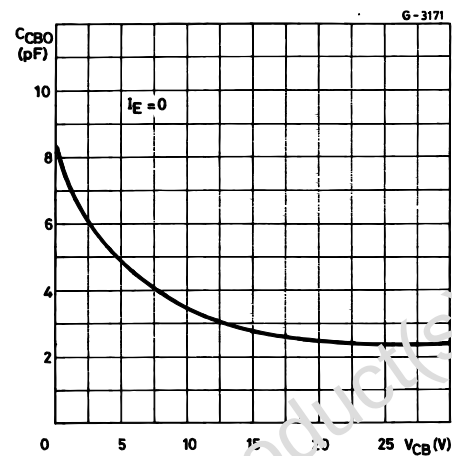


Noise Figure ($f = 100\text{ Hz}$)

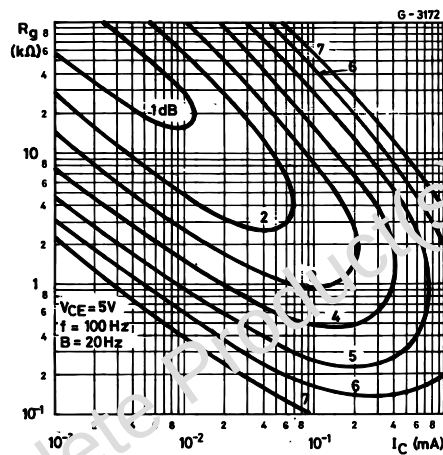


Noise Figure ($f = 1\text{ kHz}$)

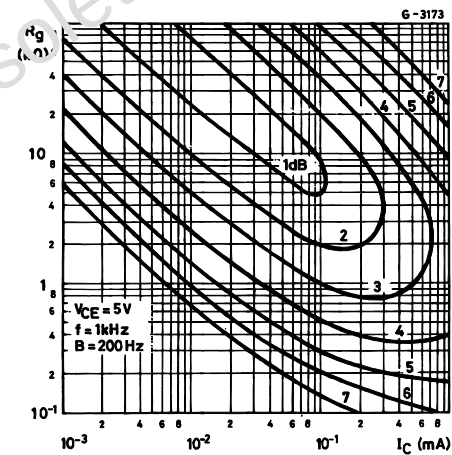

Noise Figure ($f = 10\text{ kHz}$)

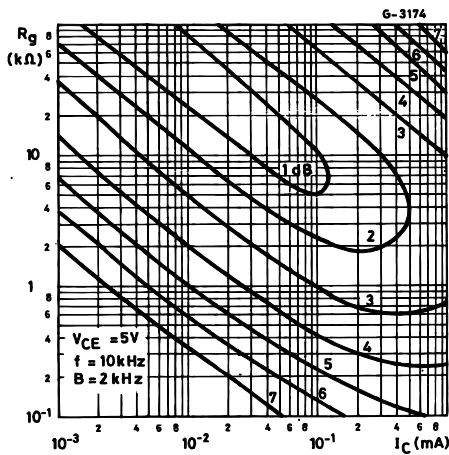


Noise Figure vs. Frequency

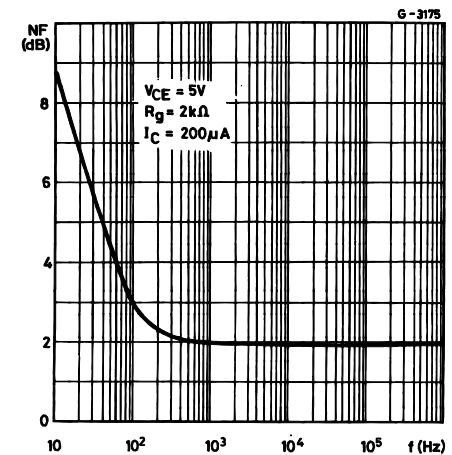

TO-18 MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A		12.7			0.500	
B			0.49			0.019
D			5.3			0.203
E			4.9			0.193
F			5.8			0.228
G	2.54			0.100		
H			1.2			0.047
I			1.16			0.045
L	45°			45°		

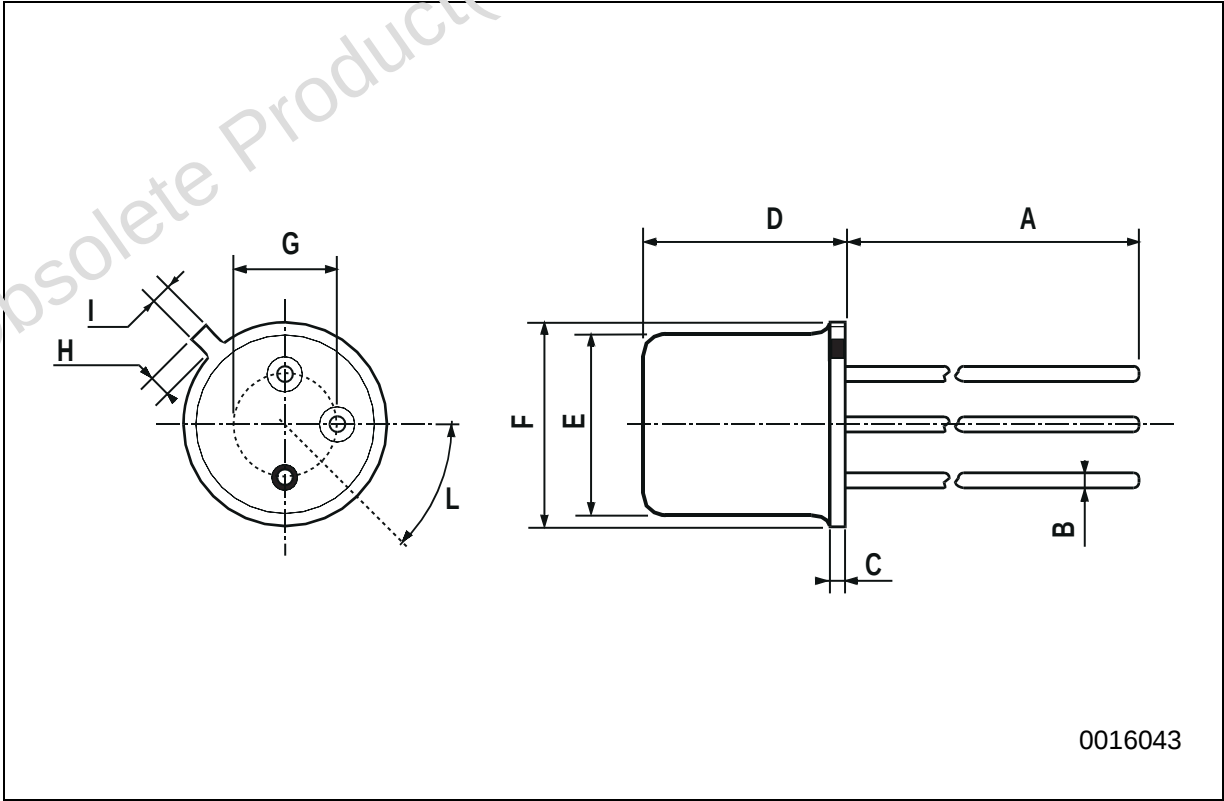

Obsolete Product(s) - Obsolete Product(s)

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a trademark of STMicroelectronics

© 2002 STMicroelectronics – Printed in Italy – All Rights Reserved

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States.

<http://www.st.com>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[STMicroelectronics:](#)

[BCY59X](#) [BCY59VIII](#) [BCY59IX](#)