

## USB type-C protection for source application



QFN-18L 3.5 x 3.5 x 0.55 mm

### Product labels



### Features

- Externally programmable VBUS over current protection (OCP)
- Integrated charge pump and gate driver for external N-channel MOSFET
- Current sense on VBUS with analog output
- Integrated discharge on VBUS and VCONN
- Over temperature protection
- Over voltage protection (OVP) on CC lines against short-to-V<sub>BUS</sub>
- V<sub>CONN</sub> OCP (100 mW max), OVP (6 V max)
- ESD protection for CC1, CC2, compliant with IEC 61000-4-2 Level 4 (±8 kV contact discharge, ±15 kV air discharge)
- Compliant with PPS (programmable power supply)
- I<sup>2</sup>C communication, with two I<sup>2</sup>C addresses available
- Junction temperature from -40 °C to 125 °C
- Compliant with USB-C power delivery standard 3.1, standard power range (SPR), up to 100 W
- ECOPACK2 compliant

### Applications

- USB-C chargers, adapters, power sharing adapters, battery charger
- Wall plugs, car charger, PoE to USB-C adapter, power bank
- Desktop, monitor, docking, USB hub, dual-port charger

### Description

The **TCPP02-M18** is a MCU companion chip enabling cost-effective USB-C source solution. It provides protections and functionalities to safely comply with the USB-C specification.

On provider path, **TCPP02-M18** drives external N-channel MOSFET to ensure overcurrent protection on VBUS pin, as well as a discharge path. It features an analog current sense and amplifier with an output accessible for a MCU ADC, thus minimizing system cost.

The **TCPP02-M18** features 24 V tolerant ESD protection as per IEC61000-4-2 level 4 on USB type-C connector communication channel pins (CC). Also, it provides overvoltage protection on CC1 and CC2 pins when these pins are subjected to short circuit with the VBUS pin that may happen when removing the USB type-C cable from its receptacle.

**TCPP02-M18** embeds I2C slave registers with two possible addresses, ideal for dual-port chargers or multiple port applications.

### Product status link

[TCPP02-M18](#)

### Expansion board

[X-NUCLEO-SRC1M1](#)

### Software example code


[X-CUBE-TCPP](#)

### I2C address

0110 10x (LSB = 'x')

## 1 Pinout and functions

**Figure 1. QFN-18L 3.5 x 3.5 x 0.55 mm (top view)**

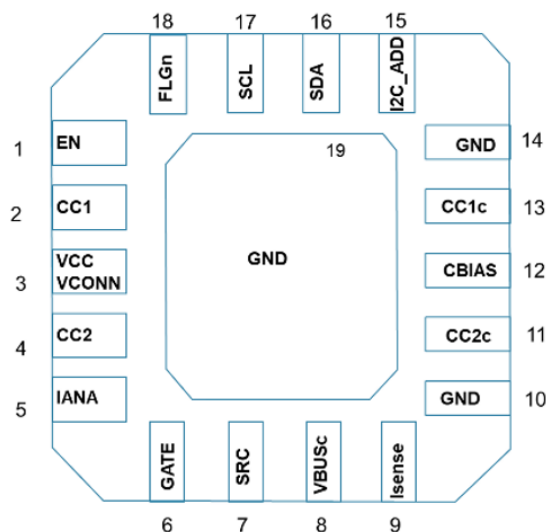


**Table 1. Pinout and functions**


Name	Pin #	Type	Description
EN	1	Input	Enable pin.
CC1	2	Input / Output	Configuration channel 1 pin on USB-C controller side.
VCC_VCONN	3	Power	Power supply for V <sub>CONN</sub> power pin. Connect to 3.3 V or 5.5 V.
CC2	4	Input / Output	Configuration channel 2 pin on USB-C controller side.
I <sub>ANA</sub>	5	Output	V <sub>BUS</sub> current analog measurement.
GATE	6	Output	Gate driver provider: gate pin of external N-channel MOSFET.
SRC	7	Input	Gate driver provider: source pin of external N-channel MOSFET.
VBUSc	8	Input	VBUS connector side.
I <sub>sense</sub>	9	Input	VBUS current measurement.
GND	10	GND	Ground.
CC2c	11	Input / Output	Configuration channel 2 pin on USB-C connector side.
C <sub>BIAS</sub>	12	Output	ESD capacitor.
CC1c	13	Input / Output	Configuration channel 1 pin on USB-C connector side.
GND	14	GND	Ground.
I2C_ADD	15	Input	Least significant bit on I2C address. Connected to GND or 1.8 V / 3.3 V.
SDA	16	Input / Output	Serial data line on I2C bus.
SCL	17	Input / Output	Serial clock line on I2C bus.
FLGn	18	Output	Open-drain output flag (active low). Floating when not connected.
GND	EP	GND	Ground exposed pad.

## 2 Block diagram

**Figure 2. Functional block diagram**

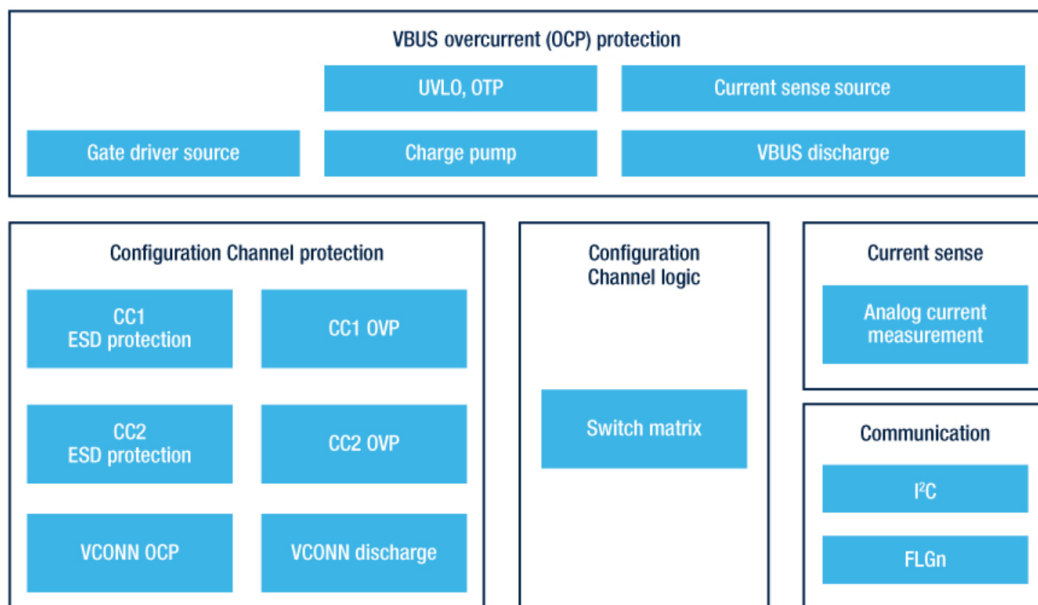


**Figure 3. Internal block diagram**

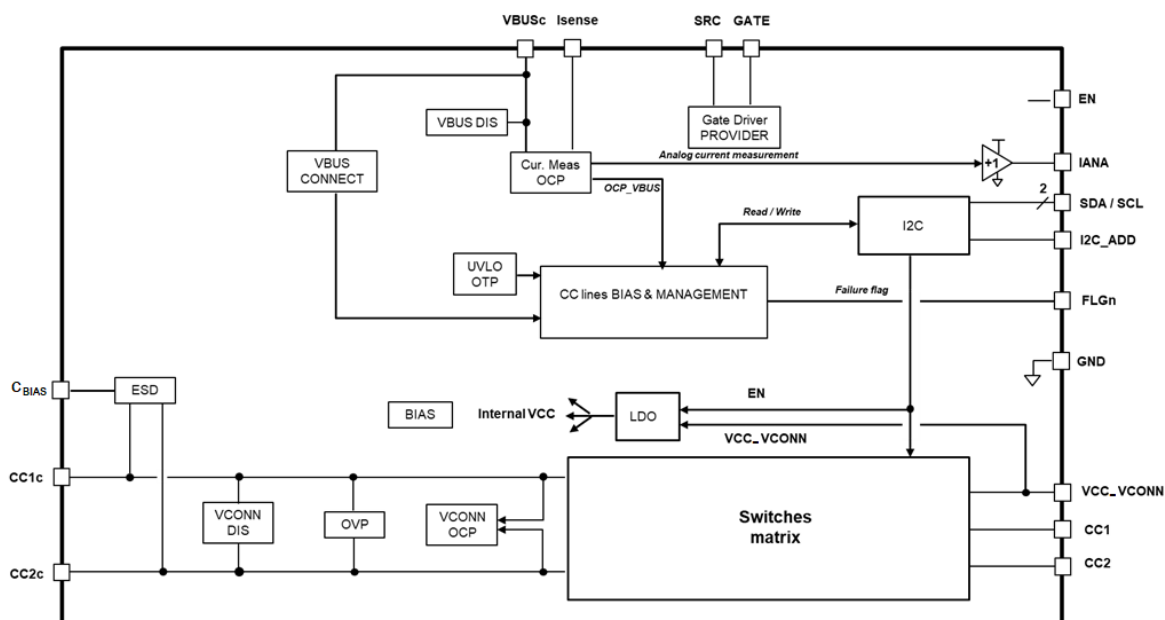

### 3 Typical USB-C source application block diagram

Figure 4. Application block diagram example

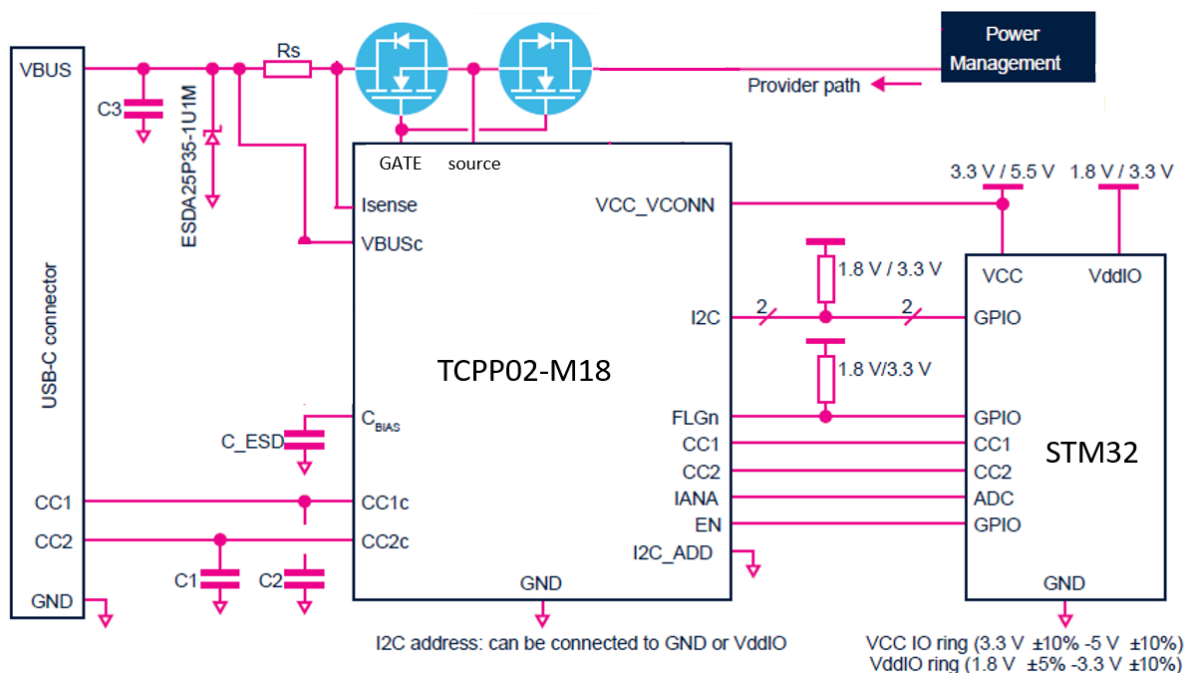

**Note:** UCPD stands for USB type-C and power delivery interface.  
 External components are described in External components description.  
 Please refer to [TA0357](#) for an overview of USB type-C and power delivery technologies.  
 Please refer to [AN5225](#) for more informations related to USB type-C power delivery using STM32xx Series MCUs and STM32xxx series MPUs.  
 For more information on EMI filtering and ESD protection of USB datalines, please refer to [AN4871](#): USB type-C protection and filtering.

## Revision history

**Table 2. Document revision history**

Date	Revision	Changes
19-Jul-2021	1	Initial release.

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to [www.st.com/trademarks](http://www.st.com/trademarks). All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2021 STMicroelectronics – All rights reserved

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[STMicroelectronics:](#)

[TCPP02-M18](#)