

SMD Power Inductor

CDEP125ME



Description

- Metal alloy core construction.
- Magnetically shielded.
- L × W × H: 12.9 × 12.9 × 5.5 mm Max.
- Product weight: 3.2 g (Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.

Environmental Data

- Operating temperature range: -40°C ~ +125°C (including coil's self temperature rise)
- Storage temperature range: -40°C ~ +85°C
- Solder reflow temperature: 260 °C peak.


Packaging

- Carrier tape and reel packaging
- 13.0" diameter reel
- 500pcs per reel


Applications

- Ideally used in personal computer CPU power supply.

Dimension - [mm]

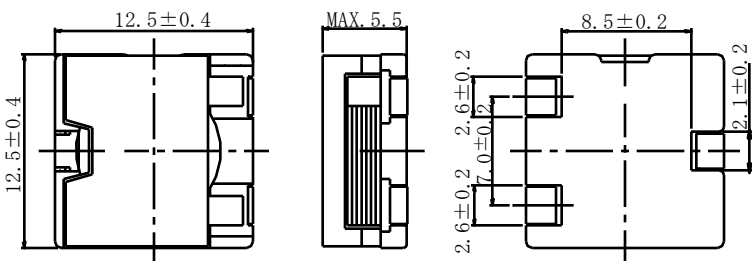

Land pattern and Schematics - [mm]

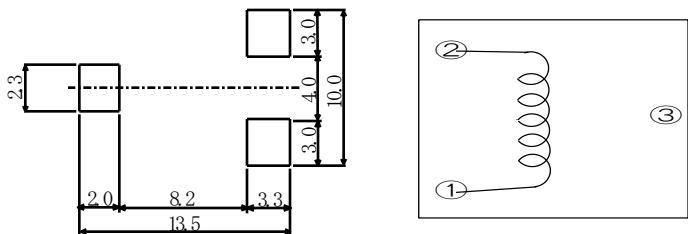

Electrical Characteristics

Part No.	Stamp	Inductance(μH) [Within] ※1	D.C.R. (mΩ) [Max.] (Typ.) (at 20°C)	Saturation current (A) ※2	Temperature rise current (A) ※3
CDEP125MENP-0R3NC	0R3N	0.3 ± 25%	1.2(1.0)	40.0	21.0
CDEP125MENP-0R7NC	0R7N	0.7 ± 25%	2.0(1.7)	32.0	20.0
CDEP125MENP-1R2NC	1R2N	1.2 ± 25%	3.1(2.6)	25.6	17.5
CDEP125MENP-2R0NC	2R0N	2.0 ± 25%	4.9(4.1)	20.4	13.5
CDEP125MENP-2R9NC	2R9N	2.9 ± 25%	7.5(6.3)	16.0	11.5

※1. Measuring condition: at 100kHz.

※2. Saturation current: The value of D.C. current when the inductance decreases to 80% of it's nominal value.






※3. Temperature rise current: The value of D.C. current when the temperature rise is Δt=40°C (Ta=20°C).

SMD Power Inductor CDEP125ME




Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) — ΔT

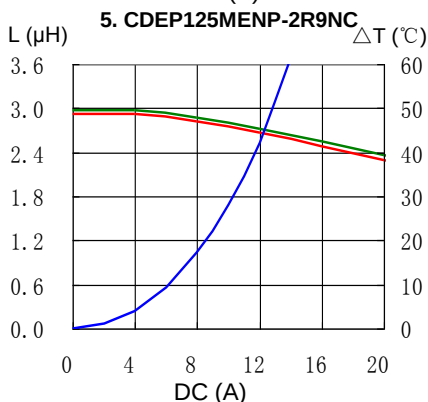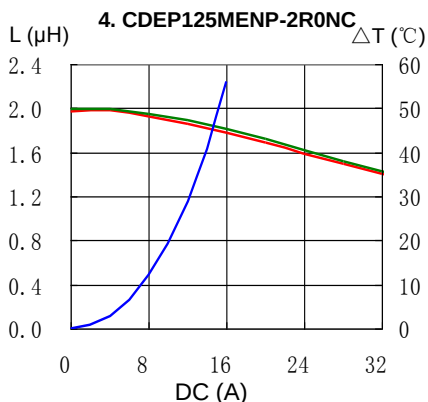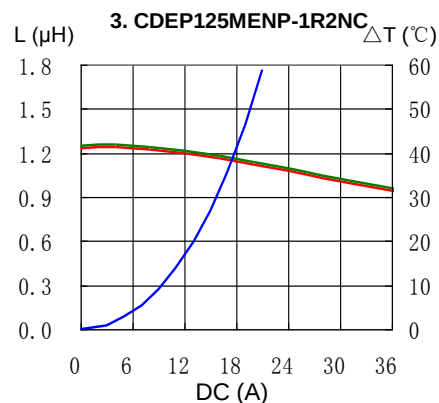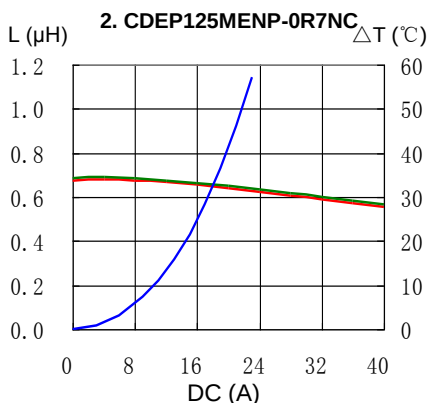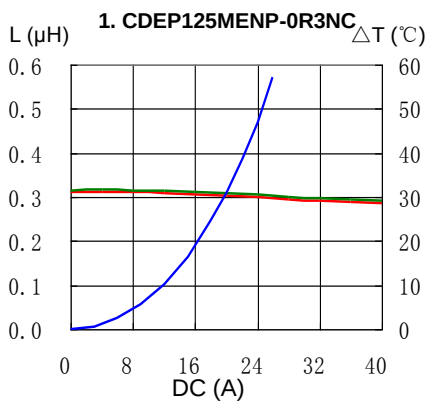


Solder Reflow Condition

Heat Endurance

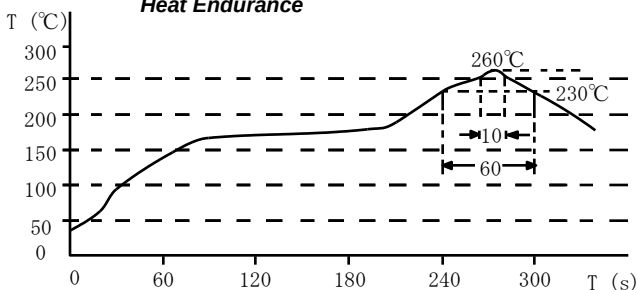

Temperature Chart

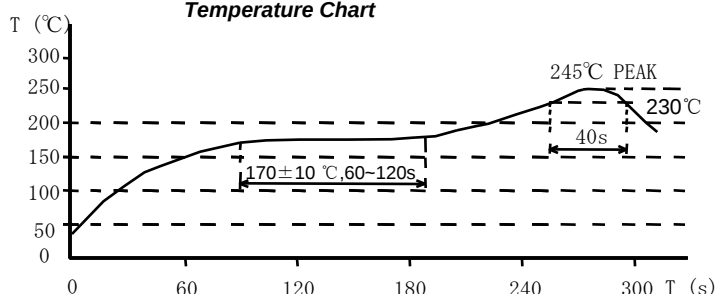

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong

Tel.+852-2880-6781
FAX.+852-2565-9600
sales@hk.sumida.com

Saitama(Japan)

Tel.+81-48-691-7300
FAX.+81-48-691-7340
sales@jp.sumida.com

Chicago

Tel.+1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai

Tel.+86-21-5836-3299
FAX.+86-21-5836-3266
shanghai.sales@cn.sumida.com

Seoul

Tel.+82-2-6237-0777
FAX.+82-2-6237-0778
sales@kr.sumida.com

Obernzell

Tel.+49-8591-937-0
FAX. +49-8591-937-103
contact@eu.sumida.com

Shenzhen

Tel.+86-755-8291-0228
FAX.+86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore

Tel.+65-6296-3388
FAX.+65-6841-4426
sales@sg.sumida.com

Neumarkt

Tel.+49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei

Tel.+886-2-8751-2737
FAX.+886-2-8751-2738
sales@tw.sumida.com

San Jose

Tel.+1-408-321-9660
FAX.+1-408-321-9308
sales@us.sumida.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Sumida:

[CDEP125MENP-0R3NC](#) [CDEP125MENP-0R7NC](#) [CDEP125MENP-1R2NC](#) [CDEP125MENP-2R0NC](#)
[CDEP125MENP-2R9NC](#) [CDEP105MENP-R80PC](#)