


Features

- ◇ Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistor (see equivalent circuit).
- ◇ The bias resistors consist of thin-film resistors with complete isolation to allow negative biasing of the input. They also have the advantage of almost completely eliminating parasitic effects.
- ◇ Only the on/off conditions need to be set for operation, marking device design easy.
- ◇ Green compound (Halogen free) with suffix "G" on packing code and prefix "G" on date code.

Equivalent Circuit

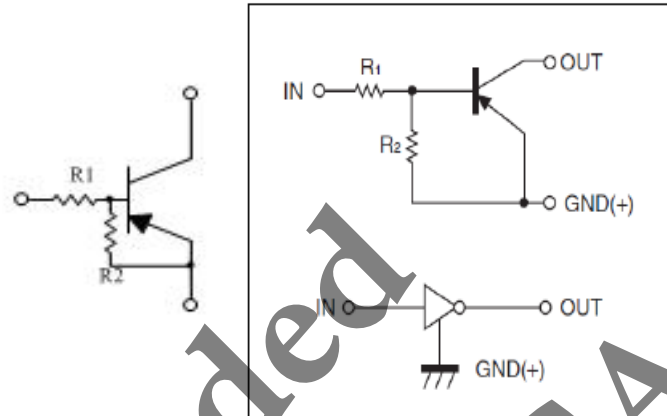

Ordering Information (example)

Part No.	Package	Packing	Packing code	Packing code (Green)	Marking	Manufacture code
DTA143 EM	SOT-723	8K / 7" Reel	RM	RMG	13	M0

Note : Detail please see "Ordering Information(detail, example)" below.

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Maximum Ratings

Parameter	Symbol	Value				Unit
		EM	EE	EUA / ECA	ESA	
Power Dissipation	P_D	100	150	200	300	mW
Supply Voltage	V_{CC}	-50				V
Input Voltage	V_{IN}	-30 ~ +10				V
Output Current	I_O	-100				mA
Junction and Storage Temperature Range	T_J, T_{STG}	-55 to +150				°C

Notes : 1. Valid provided that electrodes are kept at ambient temperature

Electrical Characteristics


Parameter	Symbol	Min	Typ	Max	Condition	Unit
Input Voltage	$V_{I(off)}$	-0.5			$V_{CC} = -5V, I_O = -100\mu A$	V
	$V_{I(on)}$			-3	$V_O = -0.3V, I_O = -20mA$	
Output Voltage	$V_{O(on)}$			-0.3	$I_O / I_I = -10mA / -0.5mA$	V
Input Current	I_I			-1.8	$V_I = -5V$	mA
Output Current	$I_O (off)$			-0.5	$V_{CC} = -50V, V_I = 0$	μA
DC Current Gain	G_I	30			$V_O = -5V, I_O = -10mA$	
Input Resistance	R_1	3.29	4.7	6.11		K Ω
Resistance Ratio	R_2/R_1	0.8	1	1.2		
Transition Frequency	f_T		250		$V_O = -10V, I_O = -5mA, f = 100MHz$	MHz

Ordering information

Part No.	Package	Packing	Packing code	Packing code (Green)	Marking	Manufacture code (Note)
DTA143 EM	SOT-723	8K / 7" Reel	RM	RMG	13	
DTA143 EE	SOT-523	3K / 7" Reel	RN	RNG	13	
DTA143 EUA	SOT-323	3K / 7" Reel	RV	RVG	13	
DTA143 ECA	SOT-23	3K / 7" Reel	RU	RUG	13	
DTA143 ESA	TO-92S	3K / Box(Ammo)	A3	A3G		
DTA143 EM	SOT-723	8K / 7" Reel	RM	RMG	13	M0
DTA143 EE	SOT-523	3K / 7" Reel	RN	RNG	13	M0
DTA143 EUA	SOT-323	3K / 7" Reel	RV	RVG	13	M0
DTA143 ECA	SOT-23	3K / 7" Reel	RU	RUG	13	M0
DTA143 ESA	TO-92S	3K / Box(Ammo)	A3	A3G		M0


Note : Manufacture special control, if empty means no special control requirement.

Dimensions

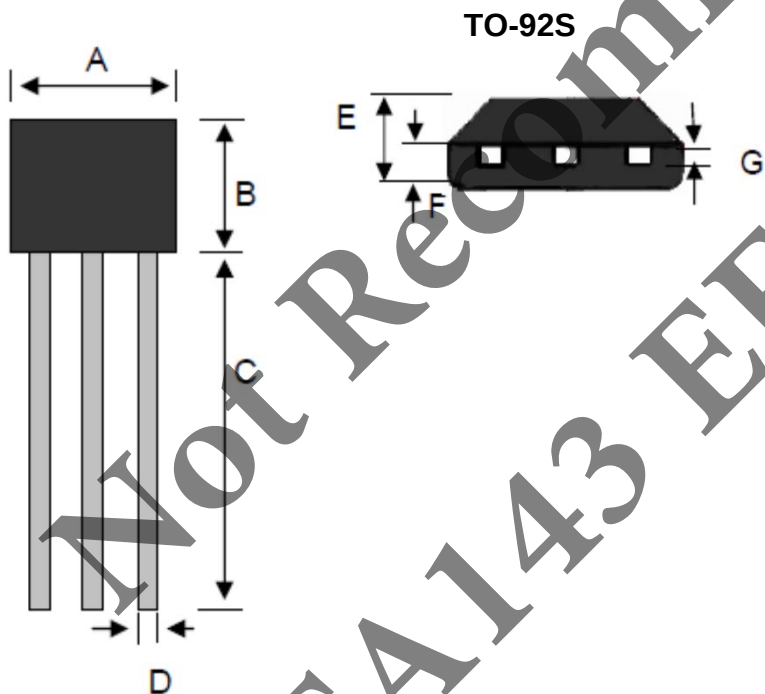


DIM.	Unit(mm)		Unit(inch)	
	Min	Max	Min	Max
A	3.85	4.15	0.15	0.16
B	3.01	3.31	0.12	0.13
C	15.10	15.50	0.59	0.61
D	0.38	0.55	0.01	0.02
E	1.42	1.62	0.06	0.06
D	0.66	0.86	0.03	0.03
E	0.36	0.51	0.01	0.02

SOT-23

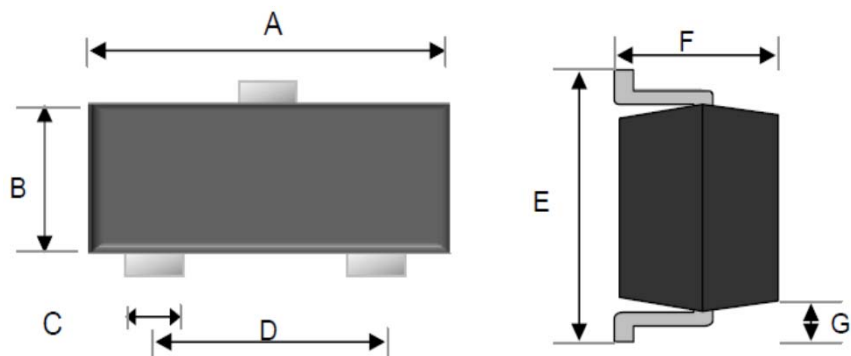


DIM.	Unit(mm)		Unit(inch)	
	Min	Max	Min	Max
A	2.80	3.00	0.11	0.12
B	1.20	1.40	0.05	0.06
C	0.30	0.50	0.01	0.02
D	1.80	2.00	0.07	0.08
E	2.25	2.55	0.09	0.10
F	0.90	1.20	0.04	0.04
G	0.550 REF		0.022 REF	

SOT-323

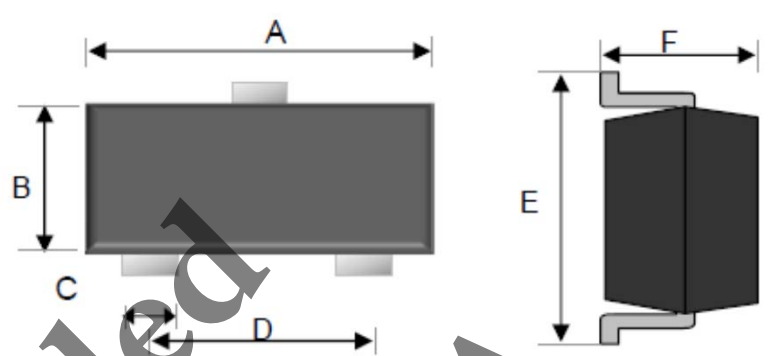


DIM.	Unit(mm)		Unit(inch)	
	Min	Max	Min	Max
A	1.90	2.10	0.07	0.08
B	1.15	1.35	0.05	0.05
C	0.25	0.35	0.01	0.01
D	1.20	1.40	0.05	0.06
E	2.00	2.20	0.08	0.09
F	0.80	1.00	0.03	0.04

SOT-523

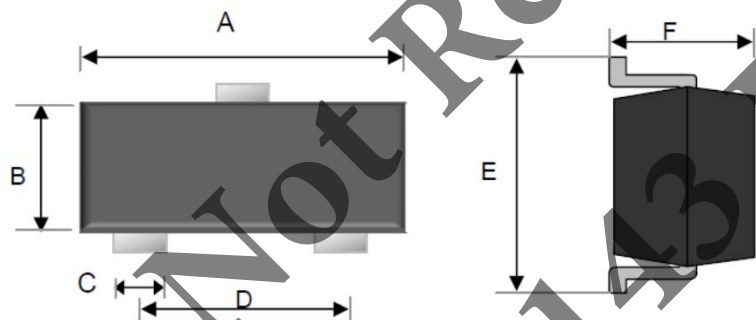

DIM.	Unit(mm)		Unit(inch)	
	Min	Max	Min	Max
A	1.50	1.70	0.06	0.07
B	0.70	0.80	0.03	0.03
C	0.25	0.35	0.01	0.01
D	0.90	1.10	0.04	0.04
E	1.50	1.70	0.06	0.07
F	0.70	0.90	0.03	0.04

SOT-723

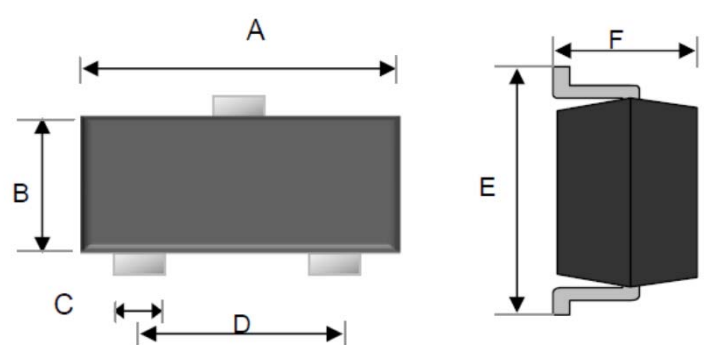

DIM.	Unit(mm)		Unit(inch)	
	Min	Max	Min	Max
A	1.15	1.25	0.05	0.05
B	0.75	0.85	0.03	0.03
C	0.17	0.27	0.01	0.01
D	0.8 TYP		0.31 TYP	
E	1.15	1.25	0.05	0.05
F		0.50		0.02

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Taiwan Semiconductor:

[DTA143ECA RF](#) [DTA143EE RK](#) [DTA143ESA](#) [DTA143EUA RR](#) [DTA143TCA RF](#) [DTA143TE RK](#) [DTA143TSA](#)
[DTA143TUA RR](#) [DTA143XCA RF](#) [DTA143XE RK](#) [DTA143XSA](#) [DTA143XUA RR](#) [DTA143ZCA RF](#) [DTA143ZE RK](#)
[DTA143ZM RL](#) [DTA143ZSA](#) [DTA143ZUA RR](#)