

1A, 50V - 600V Super Fast Surface Mount Rectifier

FEATURES

- Glass passivated chip junction
- Ideal for automated placement
- Low profile Package
- Low power loss, high efficiency
- Moisture sensitivity level: level 1, per J-STD-020
- RoHS Compliant
- Halogen-free according to IEC 61249-2-21

APPLICATIONS

- DC to DC converter
- Switching mode converters and inverters
- Freewheeling application

MECHANICAL DATA

- Case: Sub SMA
- Molding compound meets UL 94V-0 flammability rating
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Meet JESD 201 class 2 whisker test
- Polarity: Indicated by cathode band
- Weight: 0.019g (approximately)

KEY PARAMETERS		
PARAMETER	VALUE	UNIT
I_F	1	A
V_{RRM}	50 - 600	V
I_{FSM}	30	A
$T_{J\ MAX}$	150	°C
Package	Sub SMA	
Configuration	Single die	


**HALOGEN
FREE**


Sub SMA



ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	ES 1AL	ES 1BL	ES 1CL	ES 1DL	ES 1FL	ES 1GL	ES 1HL	ES 1JL	UNIT
Marking code on the device		EAL	EBL	ECL	EDL	EFL	EGL	EHL	EJL	
Repetitive peak reverse voltage	V_{RRM}	50	100	150	200	300	400	500	600	V
Reverse voltage, total rms value	$V_{R(RMS)}$	35	70	105	140	210	280	350	420	V
Forward current	I_F	1								A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	30								A
Junction temperature	T_J	- 55 to +150								°C
Storage temperature	T_{STG}	- 55 to +150								°C

THERMAL PERFORMANCE

PARAMETER	SYMBOL	TYP	UNIT
Junction-to-lead thermal resistance	$R_{\theta JL}$	35	°C/W
Junction-to-ambient thermal resistance	$R_{\theta JA}$	85	°C/W

ELECTRICAL SPECIFICATIONS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	CONDITIONS	SYMBOL	TYP	MAX	UNIT
Forward voltage ⁽¹⁾	$I_F = 1\text{A}, T_J = 25^\circ\text{C}$	V_F	-	0.95	V
			-	1.30	V
			-	1.70	V
			-	-	-
Reverse current @ rated V_R ⁽²⁾	$T_J = 25^\circ\text{C}$	I_R	-	5	μA
	$T_J = 125^\circ\text{C}$		-	100	μA
Junction capacitance	1MHz, $V_R = 4.0\text{V}$	C_J	10	-	pF
			8	-	pF
Reverse recovery time	$I_F = 0.5\text{A}, I_R = 1.0\text{A}, I_{rr} = 0.25\text{A}$	t_{rr}	-	35	ns

Notes:

- Pulse test with $PW = 0.3\text{ms}$
- Pulse test with $PW = 30\text{ms}$

ORDERING INFORMATION

ORDERING CODE ⁽¹⁾	PACKAGE	PACKING
ES1xL	Sub SMA	10,000 / Tape & Reel

Notes:

- "x" defines voltage from 50V(ES1AL) to 600V(ES1JL)

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.1 Forward Current Derating Curve

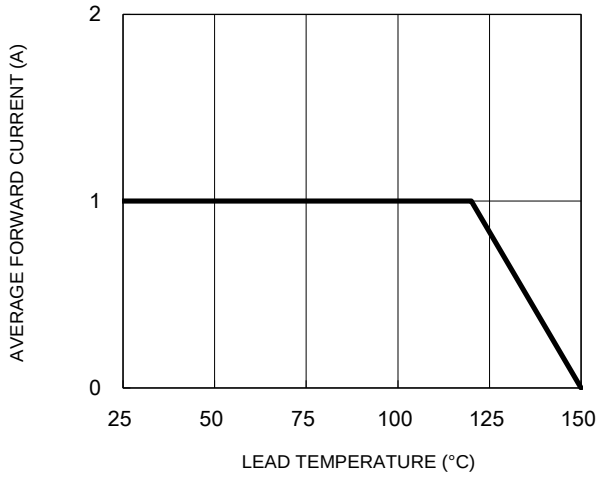


Fig.2 Typical Junction Capacitance

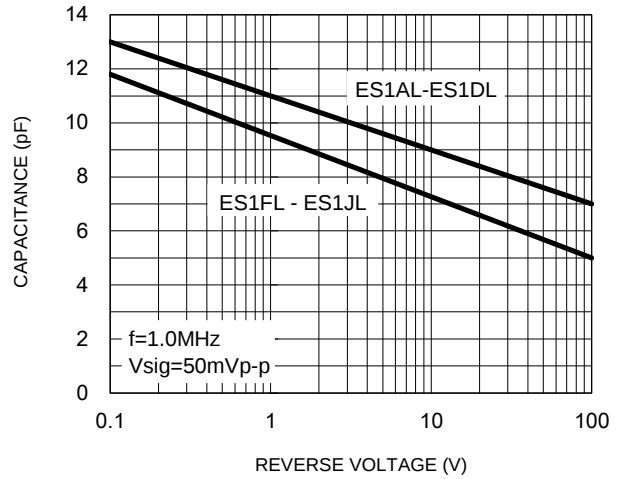


Fig.3 Typical Reverse Characteristics

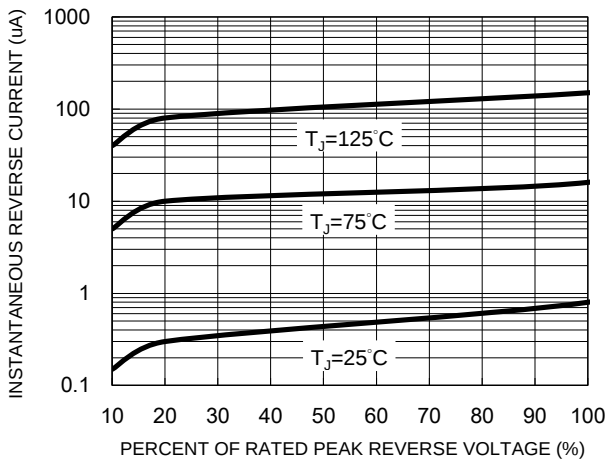


Fig.4 Typical Forward Characteristics


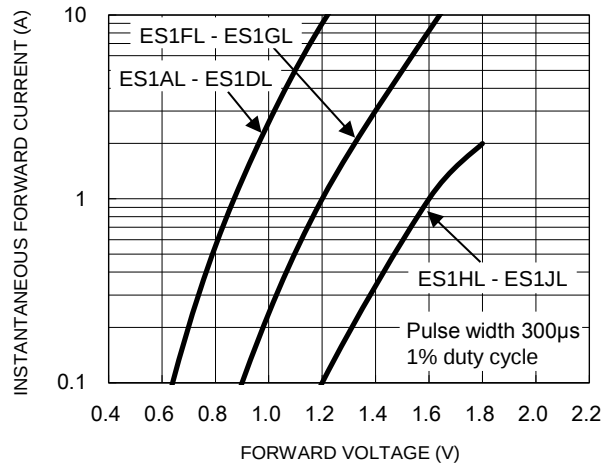



Fig.5 Maximum Non-Repetitive Forward Surge Current

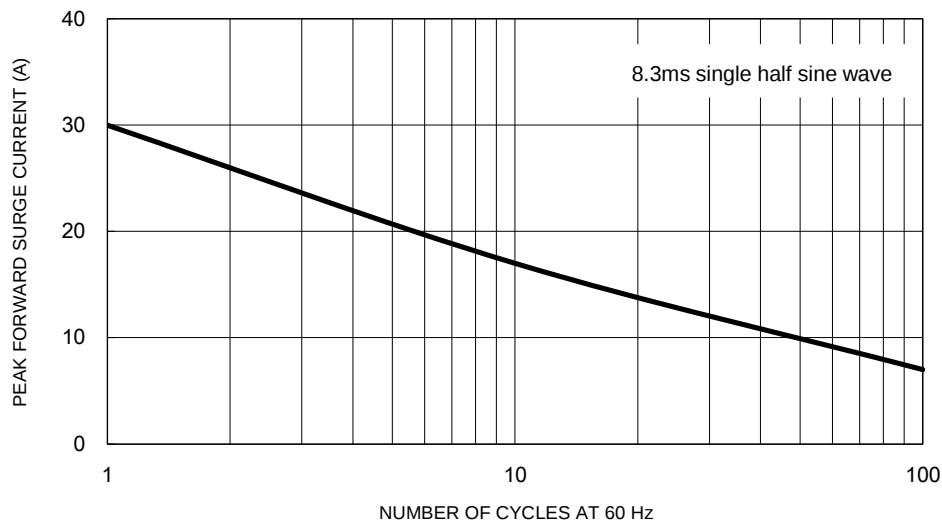

CHARACTERISTICS CURVES


($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.6 Reverse Recovery Time Characteristic and Test Circuit Diagram

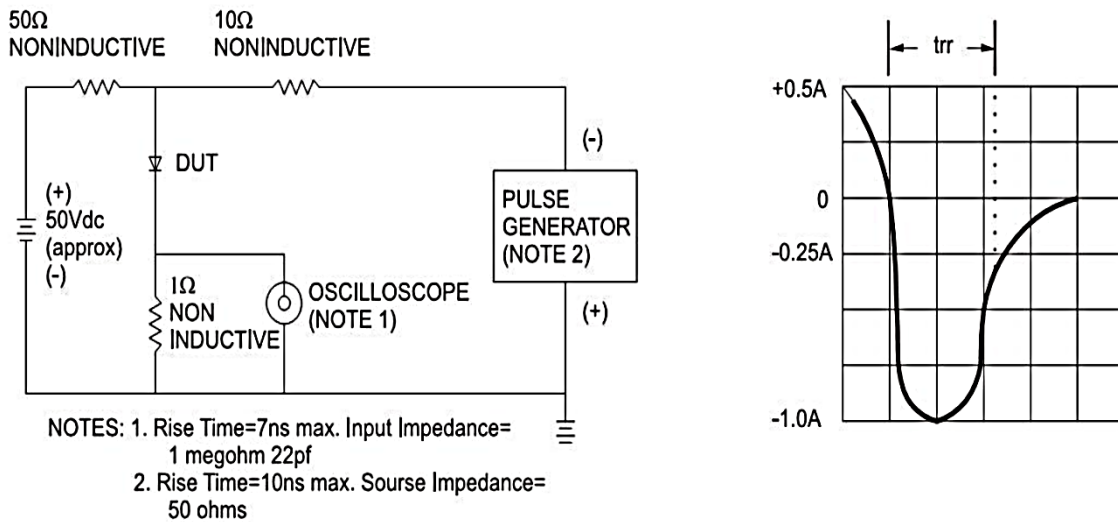


PACKAGE OUTLINE DIMENSIONS

Sub SMA

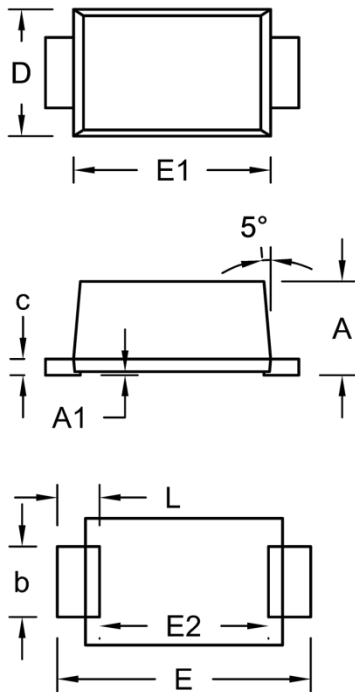

DIM.	Unit (mm)		Unit (inch)	
	Min.	Max.	Min.	Max.
A	1.23	1.43	0.048	0.056
A1	0.00	0.10	0.000	0.004
b	0.80	1.20	0.031	0.047
c	0.16	0.30	0.006	0.012
D	1.70	1.90	0.067	0.075
E	3.40	3.80	0.134	0.150
E1	2.70	2.90	0.106	0.114
E2	2.45	2.60	0.096	0.102
L	0.35	0.85	0.014	0.033

SUGGESTED PAD LAYOUT

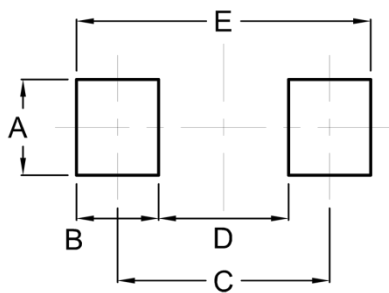

Symbol	Unit (mm)	Unit (inch)
A	1.40	0.055
B	1.20	0.047
C	3.10	0.122
D	1.90	0.075
E	4.30	0.169

MARKING DIAGRAM



P/N = Marking Code
G = Green Compound
YW = Date Code
F = Factory Code

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies.

Purchasers are solely responsible for the choice, selection, and use of TSC products and TSC assumes no liability for application assistance or the design of Purchasers' products.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Taiwan Semiconductor:

[ES1JL R2](#) [ES1JL RQ](#) [ES1DL RQ](#) [ES1DLHR2](#) [ES1DL R2](#) [ES1DL R3G](#) [ES1DLHRQG](#) [ES1DLHRQ](#) [ES1DL R2G](#)
[ES1DLHR3](#) [ES1DLHR3G](#) [ES1DLHR2G](#) [ES1DL RQG](#) [ES1GL R2](#) [ES1BLHR2G](#) [ES1ALHRQG](#) [ES1BLHR3](#) [ES1CL](#)
[R2](#) [ES1HLHR2G](#) [ES1FL RQG](#) [ES1CL R2G](#) [ES1FLHRQG](#) [ES1BLHRQ](#) [ES1CLHR3G](#) [ES1BLHR2](#) [ES1BL RQG](#)
[ES1GLHR3](#) [ES1HLHRQG](#) [ES1GL R3G](#) [ES1ALHR3G](#) [ES1AL R2G](#) [ES1AL RQ](#) [ES1BLHRQG](#) [ES1BL R3G](#)
[ES1JLHR3G](#) [ES1HL R2G](#) [ES1JL R2G](#) [ES1AL R3G](#) [ES1CLHRQG](#) [ES1BL R2](#) [ES1JLHR2G](#) [ES1FLHR2G](#)
[ES1GLHRQ](#) [ES1GL R2G](#) [ES1CL R3G](#) [ES1BLHR3G](#) [ES1FL RQ](#) [ES1GLHR2](#) [ES1HL RQ](#) [ES1JLHR3](#) [ES1FL R2G](#)
[ES1ALHR2G](#) [ES1JLHRQG](#) [ES1AL RQG](#) [ES1JLHR2](#) [ES1GLHRQG](#) [ES1HLHR3](#) [ES1FL R2](#) [ES1JLHRQ](#) [ES1HL R2](#)
[ES1GL RQG](#) [ES1GLHR2G](#) [ES1HL RQG](#) [ES1CL RQ](#) [ES1CLHR2G](#) [ES1FL R3G](#) [ES1BL R2G](#) [ES1JL RQG](#)
[ES1FLHR3G](#) [ES1CL RQG](#) [ES1JL R3G](#) [ES1GL RQ](#) [ES1BL RQ](#) [ES1AL R2](#) [ES1DLW RQG](#) [ES1JLW RQG](#)
[ES1GLW RQG](#) [ES1DL R3](#) [ES1HL R3](#) [ES1CL R3](#) [ES1AL R3](#) [ES1FL R3](#) [ES1BL R3](#) [ES1GLHM2G](#) [ES1JLHRVG](#)
[ES1JLHRHG](#) [ES1JL RVG](#) [ES1JLHM2G](#) [ES1GL M2G](#) [ES1GL RFG](#) [ES1BL RVG](#) [ES1DL RVG](#) [ES1B M2G](#) [ES1JL](#)
[M2G](#) [ES1DL M2G](#) [ES1FL RVG](#) [ES1GL RVG](#) [ES1DLHM2G](#) [ES1B F2](#) [ES1B R2](#)