

500mW, 2V - 56V Zener Diode

FEATURES

- Wide Zener voltage range selection: 2V to 56V
- Hermetically sealed glass
- RoHS Compliant

APPLICATIONS

- Low voltage stabilizers or voltage references
- Adapters
- Lighting application
- On-board DC/DC converter

MECHANICAL DATA

- Case: DO-34
- Terminal: Pure tin plated leads, solderable per J-STD-002
- Polarity: Indicated by cathode band
- Weight: 92.00mg (approximately)

KEY PARAMETERS		
PARAMETER	VALUE	UNIT
V_Z	2 - 56	V
Test current I_{ZT}	5	mA
P_D	500	mW
$T_{J\ MAX}$	175	°C
Package	DO-34	
Configuration	Single die	



DO-34



ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted)			
PARAMETER	SYMBOL	VALUE	UNIT
Power dissipation	P_D	500	mW
Junction temperature range	T_J	-55 to +175	°C
Storage temperature	T_{STG}	-55 to +175	°C

ELECTRICAL SPECIFICATIONS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PART NUMBER		MARKING CODE	ZENER VOLTAGE			TEST CURRENT	REGULAR IMPEDANCE		TEST CURRENT	LEAKAGE CURRENT	
			$V_Z @ I_{ZT}^{(1)}$			I_{ZT}	$Z_{ZT} @ I_{ZT}$	$Z_{ZK} @ I_{ZK}$	I_{ZK}	$I_R @ V_R$	
			V			mA	Ω	Ω	mA	μA	V
			Min	Nom	Max		Max	Max		Max	
MTZJ2V0S	A	2V0A	1.88	1.99	2.10	5	100	1000	0.5	120	0.5
	B	2V0B	2.02	2.11	2.20						
MTZJ2V2S	A	2V2A	2.12	2.21	2.30	5	100	1000	0.5	120	0.7
	B	2V2B	2.22	2.32	2.41						
MTZJ2V4S	A	2V4A	2.33	2.43	2.52	5	100	1000	0.5	120	1.0
	B	2V4B	2.43	2.53	2.63						
MTZJ2V7S	A	2V7A	2.54	2.65	2.75	5	110	1000	0.5	100	1.0
	B	2V7B	2.69	2.80	2.91						
MTZJ3V0S	A	3V0A	2.85	2.96	3.07	5	120	1000	0.5	50	1.0
	B	3V0B	3.01	3.12	3.22						
MTZJ3V3S	A	3V3A	3.16	3.27	3.38	5	120	1000	0.5	20	1.0
	B	3V3B	3.32	3.43	3.53						
MTZJ3V6S	A	3V6A	3.45	3.58	3.695	5	100	1000	1.0	10	1.0
	B	3V6B	3.60	3.72	3.845						
MTZJ3V9S	A	3V9A	3.74	3.88	4.01	5	100	1000	1.0	5	1.0
	B	3V9B	3.89	4.03	4.16						
MTZJ4V3S	A	4V3A	4.04	4.17	4.29	5	100	1000	1.0	5	1.0
	B	4V3B	4.17	4.30	4.43						
	C	4V3C	4.30	4.44	4.57						
MTZJ4V7S	A	4V7A	4.44	4.56	4.68	5	80	900	0.5	5	1.0
	B	4V7B	4.55	4.68	4.80						
	C	4V7C	4.68	4.81	4.93						
MTZJ5V1S	A	5V1A	4.81	4.94	5.07	5	80	1200	0.5	5	1.5
	B	5V1B	4.94	5.07	5.20						
	C	5V1C	5.09	5.23	5.37						
MTZJ5V6S	A	5V6A	5.28	5.42	5.55	5	60	900	0.5	5	2.5
	B	5V6B	5.45	5.59	5.73						
	C	5V6C	5.61	5.76	5.91						
MTZJ6V2S	A	6V2A	5.78	5.94	6.09	5	60	500	0.5	5	3.0
	B	6V2B	5.96	6.12	6.27						
	C	6V2C	6.12	6.28	6.44						
MTZJ6V8S	A	6V8A	6.29	6.46	6.63	5	20	150	0.5	2	3.5
	B	6V8B	6.49	6.66	6.83						
	C	6V8C	6.66	6.84	7.01						
MTZJ7V5S	A	7V5A	6.85	7.04	7.22	5	20	120	0.5	0.5	4.0
	B	7V5B	7.07	7.26	7.45						
	C	7V5C	7.29	7.48	7.67						
MTZJ8V2S	A	8V2A	7.53	7.73	7.92	5	20	120	0.5	0.5	5.0
	B	8V2B	7.78	7.99	8.19						
	C	8V2C	8.03	8.24	8.45						
MTZJ9V1S	A	9V1A	8.29	8.51	8.73	5	25	120	0.5	0.5	6.0
	B	9V1B	8.57	8.79	9.01						
	C	9V1C	8.83	9.07	9.30						
MTZJ10S	A	10A	9.12	9.36	9.59	5	30	120	0.5	0.2	7
	B	10B	9.41	9.66	9.90						
	C	10C	9.70	9.95	10.20						
	D	10D	9.97	10.21	10.44						
MTZJ11S	A	11A	10.18	10.45	10.71	5	30	120	0.5	0.2	8
	B	11B	10.50	10.78	11.05						
	C	11C	10.82	11.10	11.38						
MTZJ12S	A	12A	11.13	11.42	11.71	5	30	110	0.5	0.2	9
	B	12B	11.44	11.74	12.03						
	C	12C	11.74	12.05	12.35						
MTZJ13S	A	13A	12.11	12.43	12.75	5	35	110	0.5	0.2	10
	B	13B	12.55	12.88	13.21						
	C	13C	12.99	13.33	13.66						
MTZJ15S	A	15A	13.44	13.79	14.13	5	40	110	0.5	0.2	11
	B	15B	13.89	14.26	14.62						
	C	15C	14.35	14.72	15.09						
MTZJ16S	A	16A	14.80	15.19	15.57	5	40	150	0.5	0.2	12
	B	16B	15.25	15.65	16.04						
	C	16C	15.69	16.10	16.51						

ELECTRICAL SPECIFICATIONS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PART NUMBER		MARKING CODE	ZENER VOLTAGE			TEST CURRENT	REGULAR IMPEDANCE		TEST CURRENT	LEAKAGE CURRENT	
			$V_Z @ I_{ZT}^{(1)}$			I_{ZT}	$Z_{ZT} @ I_{ZT}$	$Z_{ZK} @ I_{ZK}$	I_{ZK}	$I_R @ V_R$	
			V			mA	Ω	Ω	mA	μA	V
			Min	Nom	Max		Max	Max		Max	
MTZJ18S	A	18A	16.22	16.64	17.06	5	45	150	0.5	0.2	13
	B	18B	16.82	17.26	17.70						
	C	18C	17.42	17.88	18.33						
MTZJ20S	A	20A	18.02	18.49	18.96	5	55	200	0.5	0.2	15
	B	20B	18.63	19.11	19.59						
	C	20C	19.23	19.73	20.22						
	D	20D	19.72	20.22	20.72						
MTZJ22S	A	22A	20.15	20.68	21.2	5	30	200	0.5	0.2	17
	B	22B	20.64	21.18	21.71						
	C	22C	21.08	21.63	22.17						
	D	22D	21.52	22.08	22.63						
MTZJ24S	A	24A	22.05	22.62	23.18	5	35	200	0.5	0.2	19
	B	24B	22.61	23.19	23.77						
	C	24C	23.12	23.72	24.31						
	D	24D	23.63	24.24	24.85						
MTZJ27S	A	27A	24.26	24.89	25.52	5	45	250	0.5	0.2	21
	B	27B	24.97	25.62	26.26						
	C	27C	25.63	26.29	26.95						
	D	27D	26.29	26.97	27.64						
MTZJ30S	A	30A	26.99	27.69	28.39	5	55	250	0.5	0.2	23
	B	30B	27.70	28.42	29.13						
	C	30C	28.36	29.09	29.82						
	D	30D	29.02	29.77	30.51						
MTZJ33S	A	33A	29.68	30.45	31.22	5	65	250	0.5	0.2	25
	B	33B	30.32	31.10	31.88						
	C	33C	30.90	31.70	32.50						
	D	33D	31.49	32.30	33.11						
MTZJ36S	A	36A	32.14	32.97	33.79	5	75	250	0.5	0.2	27
	B	36B	32.79	33.64	34.49						
	C	36C	33.40	34.27	35.13						
	D	36D	34.01	34.89	35.77						
MTZJ39S	A	39A	34.68	35.58	36.47	5	85	250	0.5	0.2	30
	B	39B	35.36	36.28	37.19						
	C	39C	36.00	36.93	37.85						
	D	39D	36.63	37.58	38.52						
	E	39E	37.36	38.33	39.29						
	F	39F	38.14	39.13	40.11						
	G	39G	38.94	39.87	40.80						
MTZJ43S	-	43S	40.00	42.50	45.00	5	90	250	0.5	0.2	33
MTZJ47S	-	47S	44.00	46.50	49.00		90	250	0.5	0.2	36
MTZJ51S	-	51S	48.00	51.00	54.00		110	250	0.5	0.2	39
MTZJ56S	-	56S	53.00	56.50	60.00		110	250	0.5	0.2	43

Notes:

1. The Zener voltage subdivision (V_Z) is measured 30ms after diode is powered up
2. The operating resistance (Z_{ZT} or Z_{ZK}) is measured by superimposing a minute alternation current in the regulated current (I_Z)
3. When ordering, please specify tolerance A, B, C, D, E, F, G

ORDERING INFORMATION

ORDERING CODE⁽¹⁾⁽²⁾	PACKAGE	PACKING
MTZJxSx R0	DO-34	10,000 / 14" Reel
MTZJxSx A0	DO-34	5,000 / Ammo Box
MTZJxSx R0G	DO-34	10,000 / 14" Reel
MTZJxSx A0G	DO-34	5,000 / Ammo Box

Notes:

1. "x" defines voltage from 2V (MTZJ2V0SA) to 56V (MTZJ56S)
2. Above ordering codes A0/A0G/R0/R0G refer to physically identical parts without any differences

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.1 $V_Z - I_Z$ Characteristics

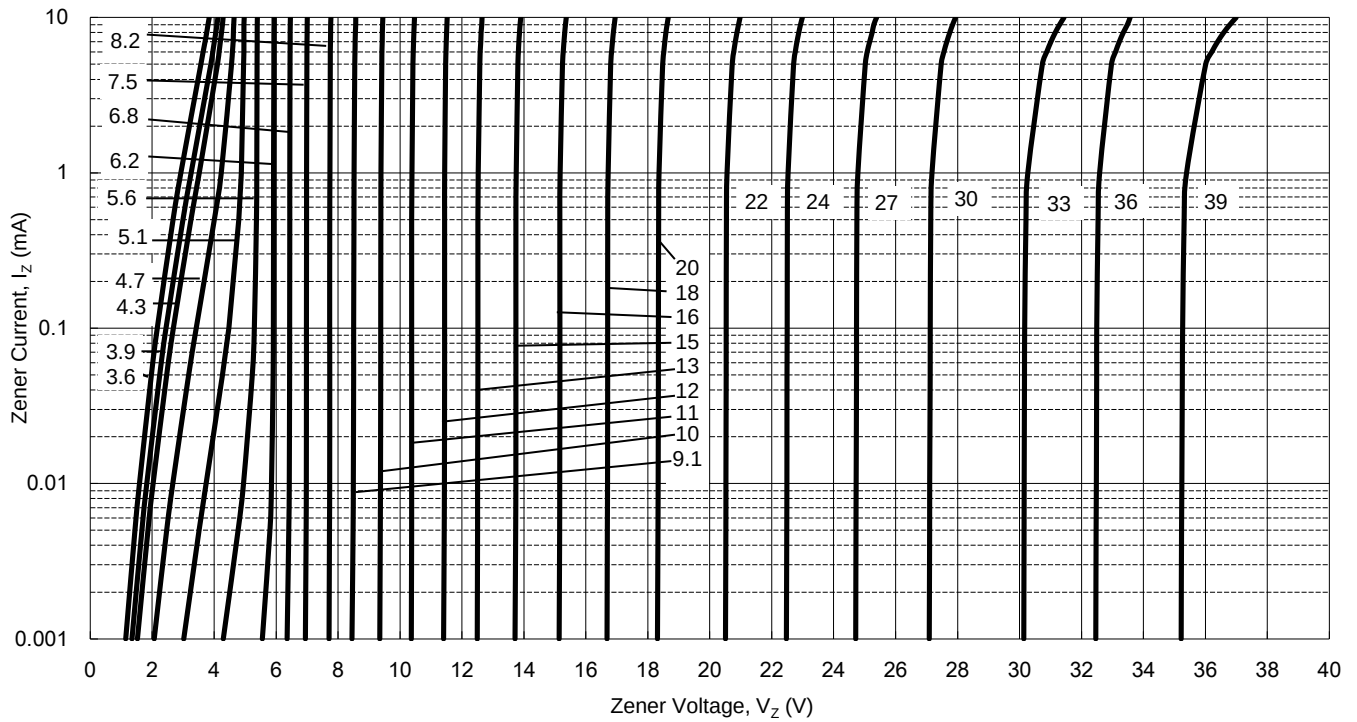


Fig.2 $P_D - T_A$ Characteristics




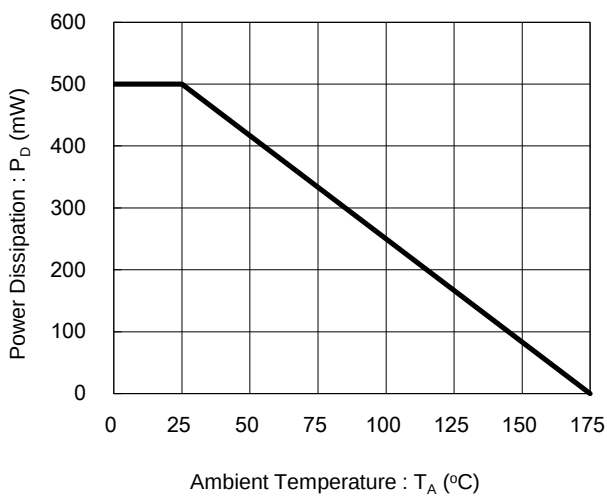


Fig.3 $r_z - V_Z$ Characteristics

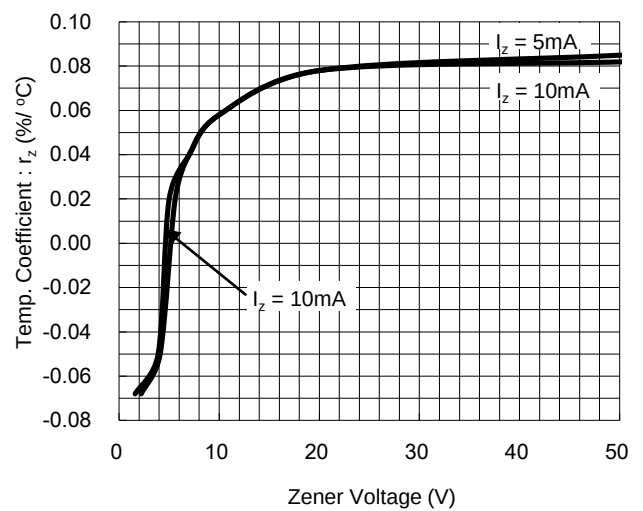

PACKAGE OUTLINE DIMENSIONS

DO-34

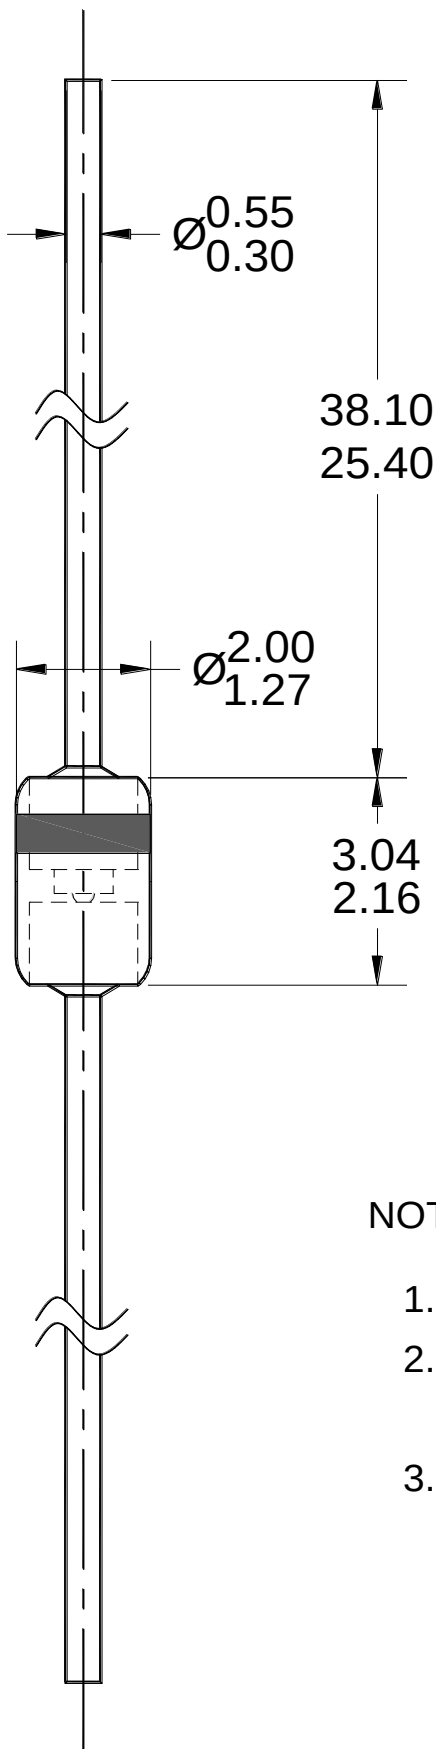

XX = MARKING CODE

MARKING DIAGRAM

NOTES: UNLESS OTHERWISE SPECIFIED

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994.
3. DWG NO. REF: HQ2SD07-DO34-057 REV A.

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies.

Purchasers are solely responsible for the choice, selection, and use of TSC products and TSC assumes no liability for application assistance or the design of Purchasers' products.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Taiwan Semiconductor:](#)

[P4SMA160A](#)