# **High Performance Low Pass Filter** LP1206A2000ASTR



The ITF SMD Filter is based on thin-film multilayer technology. The technology provides a miniature part with excellent high frequency performance and rugged construction for reliable automatic assembly.

The ITF Filter is offered in a variety of frequency bands compatible with various types of high frequency wireless systems.

#### **FEATURES:**

- . Small size: 1206
- Frequency: 2000MHz
- Sharp attenuation slope •
- Characteristic impedance: 500hm
- Operating / Storage temp: -40°C ÷ +85°C •
- Low profile •
- Rugged construction ٠
- Taped and reeled
- Power handling: 8W

### **APPLICATIONS:**

- Mobile communications
- Satellite TV receivers .
- GPS .
- Vehicle location systems .
- Wireless LAN's .

#### FINAL QUALITY INSPECTION:

Finished parts are 100% tested for electrical parameters and visual/ mechanical characteristics. Each production lot is evaluated on a sample basis for:

- Static Humidity: 85°C, 85% RH, 160 hours •
- . Endurance : 125°C, IR, 4 hours

#### **TERMINATION:**


Nickel/ Lead-Free Solder coating (Sn100) compatible with automatic soldering technologies: reflow, wave soldering, vapor phase and manual.


### PART NUMBER CODE:

LP 1206 A XXXX ASTR Frequency (MHz)




**A** 






## **TERMINALS (Top View)**



#### **RECOMMENDED PAD LAYOUT (mm)**

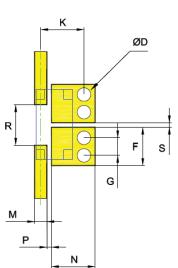

1.70±0.05
0.78±0.05
1.91±0.10
0.54±0.025
1.93±0.05
0.21±0.04
1.80±0.04
0.20±0.04
0.6±0.1





The Important Information/Disclaimer is incorporated in these specifications by reference and should be reviewed in full before placing any order.



## **ELECTRICAL CHARACTERISTICS**

P/N	I.Loss @ 2000MHz	R.Loss @ 2000MHz	ATTENUATION [min.]
LP1206A2000ASTR	0.7dB max.	-15dB	-27dB at 3000-4000MHz -25dB at 4000-6000MHz -20dB at 6000-8000MHz

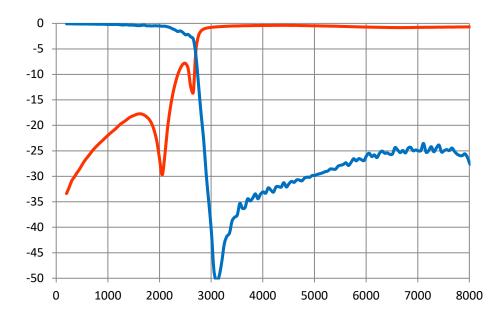



# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Kyocera AVX: LP1206A2000ASTR