POKE-HOME: HORIZONTAL

26 AWG: 00-9276

General Information





The new 9276 series connector provides a guick and reliable wire-to-board termination in a sleek 2.5mm pitch SMT package for a broad range of industrial and commercial markets. With almost every product on the market today having to deal with a small number of discrete wires to connect components to a board, the 9276 series connectors meets this challenge by simply stripping the wire and inserting them into the connector. This makes the connector very termination friendly within the factory as well as in the field by electrical installers. Developed for harsh industrial and Solid State Lighting (SSL) applications, the connector was designed with a high spring force Beryllium Copper upper spring contact to accept a wide range (18-26 AWG solid or stranded) of wire to meet multiple applications with a single connector. By incorporating a dual-contact design we were able to maximize current rating (6 Amps) and minimize PCB space. For example, the 4p connector has a footprint of 90 sq-mm while competing products are 160 sq-mm. The dual-contact design also provides two solder points for each wire eliminating the need for external anchor tabs. KYOCERA AVX provides a small insertion / extraction tool which will allow the wires to easily be replaced up to 5 times.

APPLICATIONS

- · Connecting discrete wire components directly to the PCB
- Bringing power and signals onto a PCB
- Daisy chaining PCB's together to create a continuous string of boards
- Application notes: refer to 201-01-127

FEATURES AND BENEFITS

- Simple strip, insert and removal design
- SMT RoHS termination to the PCB with minimal footprint
- Accepts 18-26 AWG Solid and Stranded wires
- Expanded size offering to maximize application potential; 1, 2, 3, 4, 6 & 8 positions
- High spring force top contact provides a lance type retention to capture and retain the wire
- Available in standard white and optional black color

ELECTRICAL

Current Rating: 6 Amps / Contact

Voltage Rating: 300 VAC

ENVIRONMENTAL

0

Horizontal


Mountin

Operating Temperature: -40°C to +125°C

MECHANICAL


- Insulator Material: Glass-Filled Nylon 46; UL94V0
- Contact Material: Beryllium Copper / Phosphor Bronze
- Plating: Tin over Nickel
- · Replaceability: 5 Cycles


HOW TO ORDER



Thin Blade Removal Tool Part Number 06-9276-7001-01-000

Certification: UL File #E90723







090721


Wire Assembly/Wire Extraction




WIRE ASSEMBLY FOR FURTHER DETAILS REFER TO APPLICATION NOTES 201-01-127



TRIM INSULATION. DO NOT CRUSH CENTER OF WIRE. STRANDED WIRES TWISTED TOGETHER BEFORE INSERTION. CHECK ALL STANDS OF WIRE ARE CORRECTLY ALIGNED AFTER THE INSULATION IS REMOVED.






PUSH WIRE INTO HOLE IN FRONT OF CONNECTOR DO NOT BEND CONNECTOR

CONTINUED TO PUSH WIRE UNTIL STOP IS REACHED.

WIRE EXTRACTION

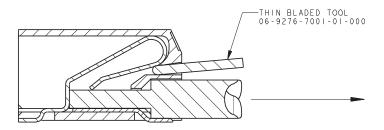

PUSH BLADE (NOT SHARP) INTO SLOT ABOVE WIRE. WHEN WIRE IS FREE, PULL TO EXTRACT.


090721


1 Position




1 WAY WIRE TO BOARD CONNECTOR



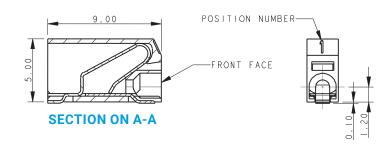





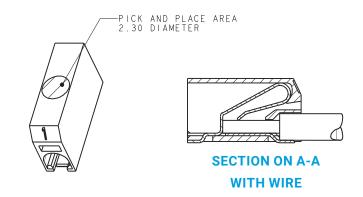


NOTES:

- 1. 9276 ONE WAY CONNECTOR, REFER TO ELCO SPECIFICATION 201-01-125 AND APPLICATION NOTES 201-01-127 FOR FURTHER DETAILS
- 2. INSULATOR MATERIAL: NYLON 46, GLASS FILLED, UL94 V-0, COLOR REFER TO PAGE 76.
- 3. CONTACT MATERIAL: COPPER ALLOY, 0.20MM THICK, TIN PLATED.
- 4. OUTLINE OF CONNECTOR.
- 5. WIRE ASSEMBLY / EXTRACTION, REFER TO PAGE 77.
- 6. FRONT FACE OF CONNECTOR CAN BE IN LINE WITH EDGE OF PCB.
- 7. PACKING TAPE AND REEL, QUANTITY 1000 PER REEL.

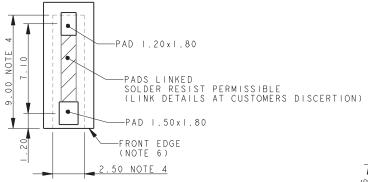








2 Position




2 WAY WIRE TO BOARD CONNECTOR



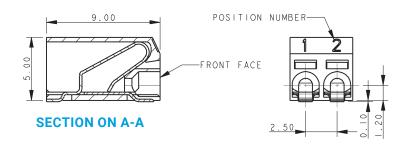




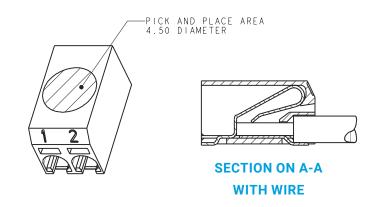


NOTES:

- 1. 9276 TWO WAY CONNECTOR, REFER TO ELCO SPECIFICATION 201-01-125 AND APPLICATION NOTES 201-01-127 FOR FURTHER DETAILS
- 2. INSULATOR MATERIAL: NYLON 46, GLASS FILLED, UL94 V-0, COLOR REFER TO PAGE 76.
- 3. CONTACT MATERIAL: COPPER ALLOY, 0.20MM THICK, TIN PLATED.
- 4. OUTLINE OF CONNECTOR.
- 5. WIRE ASSEMBLY / EXTRACTION, REFER TO PAGE 77.
- 6. FRONT FACE OF CONNECTOR CAN BE IN LINE WITH EDGE OF PCB.
- 7. PACKING TAPE AND REEL, QUANTITY 1000 PER REEL.

2 WAY PCB BOARD LAYOUT

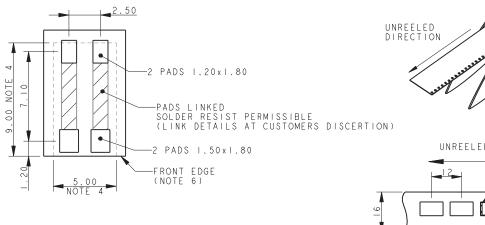





PACKING DETAILS


3 Position




3 WAY WIRE TO BOARD CONNECTOR



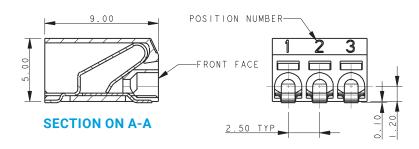




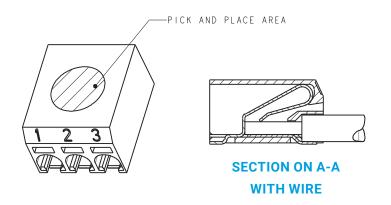

PACKING DETAILS

NOTES:


- 1. 9276 THREE WAY CONNECTOR, REFER TO ELCO SPECIFICATION 201-01-125 AND APPLICATION NOTES 201-01-127 FOR FURTHER DETAILS
- 2. INSULATOR MATERIAL: NYLON 46, GLASS FILLED, UL94 V-0, COLOR REFER TO PAGE 76.
- 3. CONTACT MATERIAL: COPPER ALLOY, 0.20MM THICK, TIN PLATED.
- 4. OUTLINE OF CONNECTOR.
- 5. WIRE ASSEMBLY / EXTRACTION, REFER TO PAGE 77.
- 6. FRONT FACE OF CONNECTOR CAN BE IN LINE WITH EDGE OF PCB.
- 7. PACKING TAPE AND REEL, QUANTITY 1000 PER REEL.

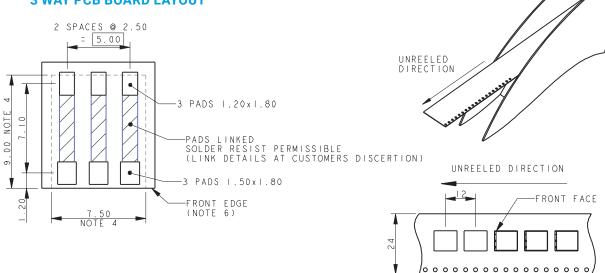


4 Position




4 WAY WIRE TO BOARD CONNECTOR

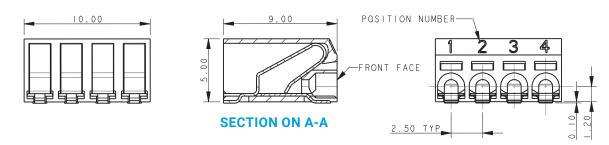


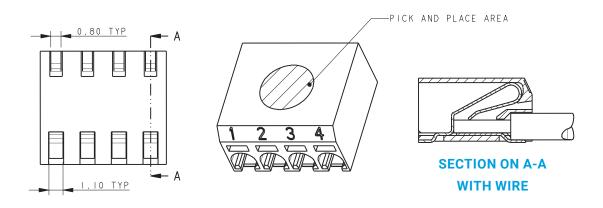

NOTES:

- 1. 9276 FOUR WAY CONNECTOR, REFER TO ELCO SPECIFICATION 201-01-125 AND APPLICATION NOTES 201-01-127 FOR FURTHER DETAILS
- 2. INSULATOR MATERIAL: NYLON 46, GLASS FILLED, UL94 V-0, COLOR REFER TO PAGE 76.
- CONTACT MATERIAL: COPPER ALLOY, 0.20MM THICK, TIN PLATED.
- 4. OUTLINE OF CONNECTOR.
- 5. WIRE ASSEMBLY / EXTRACTION, REFER TO PAGE 77.
- 6. FRONT FACE OF CONNECTOR CAN BE IN LINE WITH EDGE OF PCB.
- 7. PACKING TAPE AND REEL, QUANTITY 1000 PER REEL.

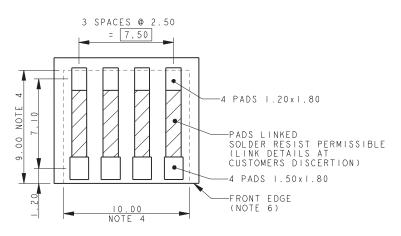

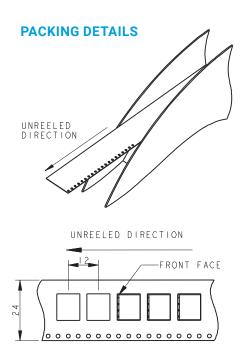





6 Position



6 WAY WIRE TO BOARD CONNECTOR

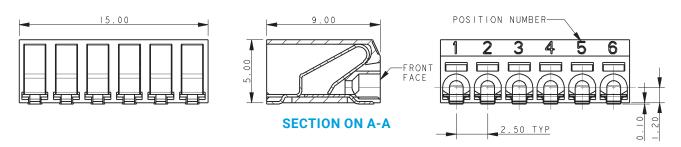


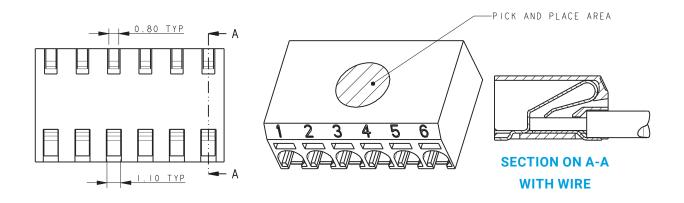


NOTES:

- 1. 9276 SIX WAY CONNECTOR, REFER TO ELCO SPECIFICATION 201-01-125 AND APPLICATION NOTES 201-01-127 FOR FURTHER DETAILS
- 2. INSULATOR MATERIAL: NYLON 46, GLASS FILLED, UL94 V-0, COLOR REFER TO PAGE 76.
- 3. CONTACT MATERIAL: COPPER ALLOY, 0.20MM THICK, TIN PLATED.
- 4. OUTLINE OF CONNECTOR.
- 5. WIRE ASSEMBLY / EXTRACTION, REFER TO PAGE 77.
- 6. FRONT FACE OF CONNECTOR CAN BE IN LINE WITH EDGE OF PCB.
- 7. PACKING TAPE AND REEL, QUANTITY 1000 PER REEL.

6 WAY PCB BOARD LAYOUT

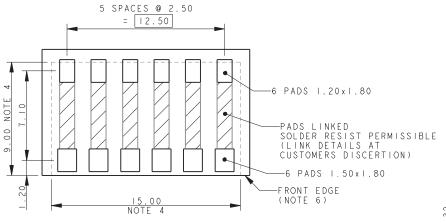




KYDCER3 | The Important Information/Disclaimer is incorporated in the catalog where these specifications came from or available online at www.avx.com/disclaimer/ by reference and should be reviewed in full before placing any order.

8 Position





8 WAY WIRE TO BOARD CONNECTOR

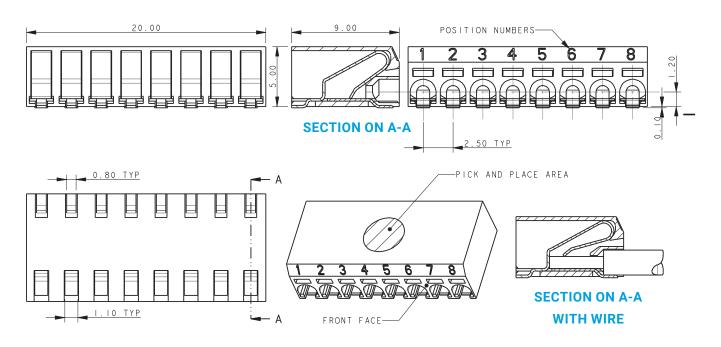


NOTES:

- 1. 9276 EIGHT WAY CONNECTOR, REFER TO ELCO SPECIFICATION 201-01-125 AND APPLICATION NOTES 201-01-127 FOR FURTHER DETAILS
- 2. INSULATOR MATERIAL: NYLON 46, GLASS FILLED, UL94 V-0, COLOR REFER TO PAGE 76.
- 3. CONTACT MATERIAL: COPPER ALLOY, 0.20MM THICK, TIN PLATED.
- 4. OUTLINE OF CONNECTOR.
- 5. WIRE ASSEMBLY / EXTRACTION, REFER TO PAGE 77.
- 6. FRONT FACE OF CONNECTOR CAN BE IN LINE WITH EDGE OF PCB.
- 7. PACKING TAPE AND REEL, QUANTITY 1000 PER REEL.

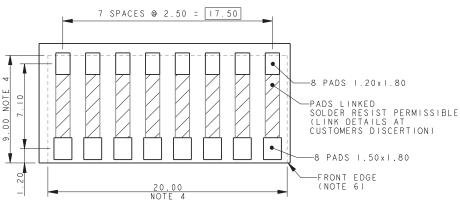





Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

KYOCERA AVX:

 $\frac{009276002021806}{009276002021906} \quad \frac{009276003021906}{0092760004021906} \quad \frac{009276004021806}{0092760002021906} \quad \frac{009276001021806}{009276000021906} \quad \frac{009276001021806}{009276000021906}$