

## 175/180/200W Configurable ac/dc power supply.



| Features                            | Benefits                  |
|-------------------------------------|---------------------------|
| • High efficiency                   | Minimises heat in system  |
| • Low profile                       | Fits 1U applications      |
| • High power density                | Reduces space requirement |
| • Temperature controlled fan option | Reduces system noise      |
| • 3 year warranty                   | Low cost of ownership     |

| Input                 |                                                                                                                                                                      |                 |                                                              |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|--------------------------------------------------------------|
| Input Voltage         | 90-264Vac<br>133-388Vdc also available, contact sales                                                                                                                | Input Frequency | 45 - 63Hz<br>(440Hz with reduced PFC - consult sales office) |
| Input Harmonics       | EN61000-3-2 compliant                                                                                                                                                | Inrush Current  | <40A at 25°C and 230Vac (cold start)                         |
| Input Fuse            | Timelag (not user accessible)                                                                                                                                        |                 |                                                              |
| Earth Leakage Current | 123µA at 120Vac (60Hz), 257µA max at 240Vac (60Hz)<br>Worst case leakage current is less than 300µA at 264Vac, 63Hz (normal condition, 500µA Single Fault Condition) |                 |                                                              |

| Available Outputs                        |                                                |                                                                                    |                                        |                                                                                |                                  |                                                                                                                                                                                                                                        |                                                    |
|------------------------------------------|------------------------------------------------|------------------------------------------------------------------------------------|----------------------------------------|--------------------------------------------------------------------------------|----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|
| Channel 1                                | Adjustment Range                               | Channel 2 <sub>1</sub>                                                             | Adjustment Range                       | Channel 3 <sub>3</sub>                                                         | Adjustment Range                 | Channel 4 <sub>4</sub>                                                                                                                                                                                                                 | Adjustment Range                                   |
| <b>5</b> 5V / 25A <sub>2</sub>           | 5 - 5.5V                                       | <b>1</b> 1.8V / 15A<br><b>2</b> 2.7V / 15A<br><b>3</b> 3.3V / 15A<br><b>0</b> Omit | 0.9 - 2.5V<br>2.5 - 3.3V<br>2.5 - 3.3V | <b>T</b> 12V / 5A<br><b>F</b> 15V / 5A<br><b>G</b> 24V / 2.5A<br><b>0</b> Omit | 12 - 15V<br>12 - 15V<br>18 - 24V | <b>T</b> -12V / 1A<br><b>F</b> -15V / 1A<br><b>3H</b> -3.3V / 2A <sub>9</sub><br><b>5H</b> -5V / 2A <sub>9</sub><br><b>TH</b> -12V / 2A <sub>9</sub><br><b>FH</b> -15V / 2A <sub>9</sub><br><b>0H</b> Fan supply only<br><b>0</b> Omit | Fixed<br>Fixed<br>Fixed<br>Fixed<br>Fixed<br>Fixed |
| <b>T</b> 12V / 15A<br><b>F</b> 15V / 12A | 12 - 15V <sub>5</sub><br>12 - 15V <sub>6</sub> | <b>5</b> 5V / 10A <sub>10</sub><br><b>0</b> Omit                                   | 3.3 - 5.5V                             |                                                                                |                                  |                                                                                                                                                                                                                                        |                                                    |
| <b>G</b> 24V / 7.5A                      | 24 - 28V <sub>7</sub>                          | <b>5</b> 5V / 8A <sub>8</sub><br><b>0</b> Omit                                     | 3.3 - 5.5V                             |                                                                                |                                  |                                                                                                                                                                                                                                        |                                                    |


- 1.8V, 2.7V, 3.3V channel 2 only available with 5V Channel 1  
5V/10A channel 2 only available with 12V or 15V Channel 1  
5V/8A channel 2 only available with 24V Channel 1.
- Maximum combined output current from Ch1 & Ch2 = 25A  
Models with 5V channel 1 are limited to 175W output power
- Follow letters in red by 'Y' for negative output channel 3.
- Follow letters in red by 'P' for positive output channel 4.
- 12 - 12.5V if 24V channel 3 fitted.
- 14.5 - 15V if 24V channel 3 fitted
- 24 - 24.5V if 5V channel 2 fitted  
24 - 26V if 24V channel 3 fitted.
- 7A max with '-F' or '-I' option.
- 1.5A max with '-F' or '-I' option.
- 9A max with '-F' or '-I' option.

**Other output options are available, please contact sales office with your requirements**

| Isolation       |                                                  |                                                                                     |
|-----------------|--------------------------------------------------|-------------------------------------------------------------------------------------|
| Input to Output | 2 x MOOPs (3rd edition 60601)<br>4.3kVdc         | Medical reinforced (2 x MOPPs) version available, contact sales office for details. |
| Input to Earth  | 1 x MOOP (3rd edition 60601)<br>1.5kVac, 2.3kVdc |                                                                                     |
| Output to Earth | 200Vdc                                           |                                                                                     |

## How To Create A Product Description

Confirm availability of created product with TDK-Lambda

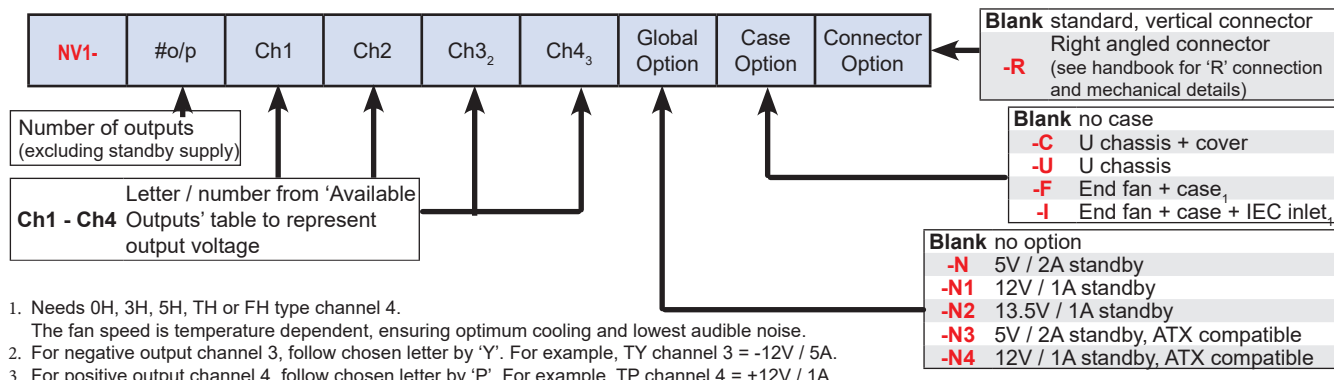

## Output Specification

|                             |                            |                                                                                                                                               |
|-----------------------------|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| Turn on time                | 1.5s max                   | at 90Vac and 100% rated output power                                                                                                          |
| Efficiency                  | up to 90%                  | configuration dependent                                                                                                                       |
| Hold up                     | 16ms min                   | at 90Vac                                                                                                                                      |
| Ripple and Noise            | <1%                        | (or 50mV if higher) pk-pk, using EIAJ test method & 20MHz bandwidth                                                                           |
| Voltage Accuracy            | ±1%                        | ±4% for Channel 4 with 'T' or 'F' type outputs, +4/-3% for all other channel 4.                                                               |
| Remote Sense                | Yes                        | Channels 1 & 2. Max 0.5V total line drop                                                                                                      |
| Minimum Load                | No                         | on any output                                                                                                                                 |
| Total Regulation            | 1%<br>(or 50mV if greater) | Including Line (for 90-264Vac input change), Load (for 0-100% load change) and Cross (for 0-100% load change on any other output) regulation. |
| Transient Response          | <4%                        | of set voltage for 50% load change<br>(in 50µs within the range 25-100% load)                                                                 |
| Recovery                    | 500µs                      | for recovery to 1% of set voltage                                                                                                             |
| Over Voltage Protection     | Yes                        | See Application Notes for details                                                                                                             |
| Short Circuit Protection    | Yes                        |                                                                                                                                               |
| Over Temperature Protection | Yes                        |                                                                                                                                               |
| Peak Output Power           | 200W                       | Single output units with 12V, 15V or 24V (T, F or G). Average output power must not exceed 180W over any 5 minute period                      |
| Ch1 Good Signal             | Yes                        | Provides a Logic 'Low' signal after Channel 1 output is within 90% (±5%) of nominal                                                           |

## QUICK SELECTOR - example configurations

| Model        | Ch1        | Ch2        | Ch3      | Ch4       | Ch5     | Global Option |
|--------------|------------|------------|----------|-----------|---------|---------------|
| NV1-1T000    | 12V / 15A  | -          | -        | -         | -       | No            |
| NV1-1G000    | 24V / 7.5A | -          | -        | -         | -       | No            |
| NV1-453TT    | 5V / 25A   | 3.3V / 15A | 12V / 5A | -12V / 1A | -       | No            |
| NV1-453TT-N3 | 5V / 25A   | 3.3V / 15A | 12V / 5A | -12V / 1A | 5V / 2A | ATX (-N3)     |
| NV1-453FF    | 5V / 25A   | 3.3V / 15A | 15V / 5A | -15V / 1A | -       | No            |
| NV1-453FF-N3 | 5V / 25A   | 3.3V / 15A | 15V / 5A | -15V / 1A | 5V / 2A | ATX (-N3)     |
| NV1-4G5TT    | 24V / 7.5A | 5V / 8A    | 12V / 5A | -12V / 1A | -       | No            |
| NV1-4G5TT-N3 | 24V / 7.5A | 5V / 8A    | 12V / 5A | -12V / 1A | 5V / 2A | ATX (-N3)     |
| NV1-4G5FF    | 24V / 7.5A | 5V / 8A    | 15V / 5A | -15V / 1A | -       | No            |
| NV1-4G5FF-N3 | 24V / 7.5A | 5V / 8A    | 15V / 5A | -15V / 1A | 5V / 2A | ATX (-N3)     |

Additional variants available 'Built to Order' - see 'How to create a product description'

## Global Signals (-N, -N1 and -N2 option models)

|                |                                                                                                                                       |
|----------------|---------------------------------------------------------------------------------------------------------------------------------------|
| Remote on/off  | TTL logic level high inhibits all outputs (except Standby)                                                                            |
| Power Good     | Open collector output (referenced to PSU 0V). Turns on to indicate ac supply is good and output 1 is within regulation.               |
| Standby Supply | Isolated supply, not affected by remote on/off<br>-N option = 5V / 2A (2.5A peak)<br>-N1 Option = 12V / 1A<br>-N2 Option = 13.5V / 1A |

## Global Signals (-N3 and -N4 option models)

|                   |                                                                                                                 |
|-------------------|-----------------------------------------------------------------------------------------------------------------|
| ATX Remote on/off | TTL logic level high or open circuit inhibits all outputs (except Standby)                                      |
| ATX Power Good    | Logic high indicates ac supply is good and output 1 is within regulation.                                       |
| Standby Supply    | Common 0V with power supply. Not affected by ATX remote on/off<br>-N3 option = 5V / 2A<br>-N4 Option = 12V / 1A |

## Immunity EN61000-6-2:2005, EN60601-1-2:2007

|                                         |              |         |                                                                                           | Criteria |
|-----------------------------------------|--------------|---------|-------------------------------------------------------------------------------------------|----------|
| Electrostatic Discharge                 | EN61000-4-2  | Level 4 | Air discharge 15kV, Contact discharge 8kV. Not applicable to open frame units             | A        |
| Electromagnetic Field                   | EN61000-4-3  | Level 3 | 12V/m                                                                                     | A        |
| Fast / Burst Transient                  | EN61000-4-4  | Level 4 | ac input tested to 4.4kV<br>dc output tested to 2.2kV                                     | A        |
| Surge Immunity                          | EN61000-4-5  | Level 3 | Common mode - 2.2kV, Differential - 1.1kV                                                 | A        |
| Conducted RF Immunity                   | EN61000-4-6  | Level 3 | 12V                                                                                       | A        |
| Power Frequency Magnetic Field          | EN61000-4-8  | Level 4 | 30A/m                                                                                     | A        |
| Voltage Dips, Variations, Interruptions | EN61000-4-11 | Class 3 | Criteria B for 5 sec interruption and dips to 40% for 5 cycles below 154Vac nominal input | A        |

## Emissions EN61000-6-3:2007, EN60601-1-2:2007

|                         |                  |                                                                                                                                                   |
|-------------------------|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| Radiated Electric Field | EN55011, EN55032 | (as per CISPR.11/22) Class B, FCC47 part 15 subpart B<br>see application note for details. Additional filtering is required for IEC inlet version |
| Conducted Emissions     | EN55011, EN55032 | (as per CISPR.11/22) Class B, FCC47 part 15 subpart B                                                                                             |
| Conducted Harmonics     | EN61000-3-2      | Class A                                                                                                                                           |
| Flicker                 | EN61000-3-3      | Compliant - d <sub>max</sub> only                                                                                                                 |


## Environment

|                  |                                                                                                                                                                                                                                          |
|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Temperature      | 0°C to 50°C operational, -40°C to 70°C storage.<br>Full load, with either '-F' option fitted or 2m/s air blown from input to output (approximately 10CFM)                                                                                |
| Derating         | 50°C to 70°C derate each output by 2.5% per °C                                                                                                                                                                                           |
| Low Temp Startup | -20°C                                                                                                                                                                                                                                    |
| Humidity         | 5 - 95% RH non condensing                                                                                                                                                                                                                |
| Shock            | ±3 x 30g shocks in each plane, total 18 shocks<br>30g shock = 11ms (+/-0.5msec), half sine<br>Conforms to EN60068-2-27, EN60068-2-47, IEC68-2-27, IEC68-2-47, JIS C0041-1987.<br>Conforms to MIL-STD-810E/F, Method 516.5, Pro I, IV, VI |
| Vibration        | Single axis 10 - 500 Hz at 2g (sweep and endurance at resonance) in all 3 planes<br>Conforms to EN60068-2-6, IEC68-2-6<br>Conforms to MIL-STD-810E, Method 514.4, Pro I, Cat 1,9                                                         |
| Altitude         | 3000 metres operational                                                                                                                                                                                                                  |
| Pollution        | Degree 2, Material group IIb                                                                                                                                                                                                             |

## Approvals / Accreditations

|                                                                                                  |                                                                                                                 |
|--------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|
| IEC/EN 62368-1, UL62368-1 / CSA 22.2 No 62368-1                                                  | File E135494                                                                                                    |
| IEC/EN 60950-1, UL60950-1 / CSA 22.2 No 60950-1                                                  | File E135494                                                                                                    |
| IEC/EN 60601-1, UL/CSA 60601-1, ANSI/AAMI ES60601-1<br>CAN/CSA-C22.2 No 60601-1-08               | File E349607                                                                                                    |
| IEC/EN61010                                                                                      | File E331788                                                                                                    |
| CE Mark (EN62368-1)                                                                              | Low Voltage Directive (LVD), electromagnetic compatibility (EMC) and Restriction of Hazardous Substances (RoHS) |
| CB certificate and Report available on request                                                   | <i>Please check with technical sales for status of approvals</i>                                                |
| Designed and manufactured under the control of ISO9001 and ISO13485 (including risk management). |                                                                                                                 |

## Outline & Connection Drawings

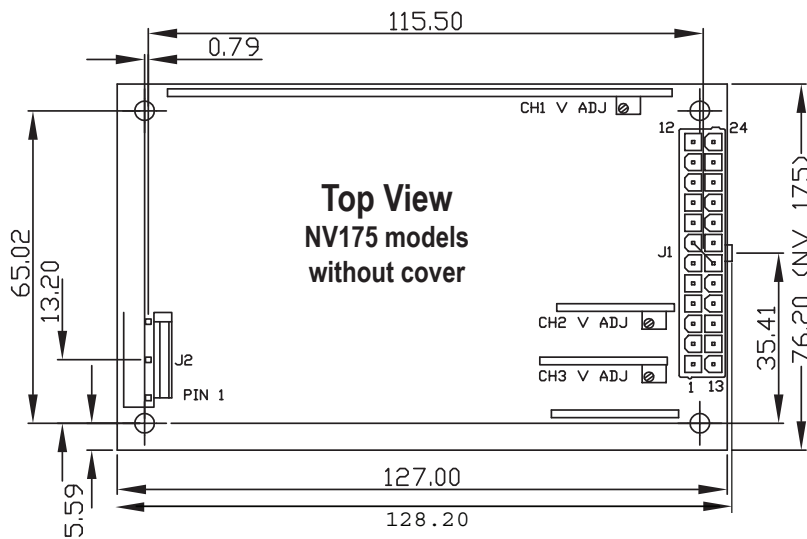


J2

| PIN | FUNCTION      |
|-----|---------------|
| 1   | EARTH         |
| 2   | NOT CONNECTED |
| 3   | LIVE          |
| 4   | NOT CONNECTED |
| 5   | NEUTRAL       |

J1

| PIN | FUNCTION    | PIN | FUNCTION       |
|-----|-------------|-----|----------------|
| 12  | STANDBY +Ve | 24  | STANDBY RETURN |
| 11  | POWER GOOD  | 23  | REMOTE ON/OFF  |
| 10  | CH1 OUTPUT  | 22  | CH1 GOOD       |
| 9   | CH1 OUTPUT  | 21  | CH1 OUTPUT     |
| 8   | CH1 OUTPUT  | 20  | CH1 OUTPUT     |
| 7   | +SENSE CH1  | 19  | -SENSE CH1     |
| 6   | 0V COMMON   | 18  | 0V COMMON      |
| 5   | 0V COMMON   | 17  | 0V COMMON      |
| 4   | CH2 OUTPUT  | 16  | 0V COMMON      |
| 3   | CH2 OUTPUT  | 15  | CH2 OUTPUT     |
| 2   | +SENSE CH2  | 14  | -SENSE CH2     |
| 1   | CH3 OUTPUT  | 13  | CH4 OUTPUT     |


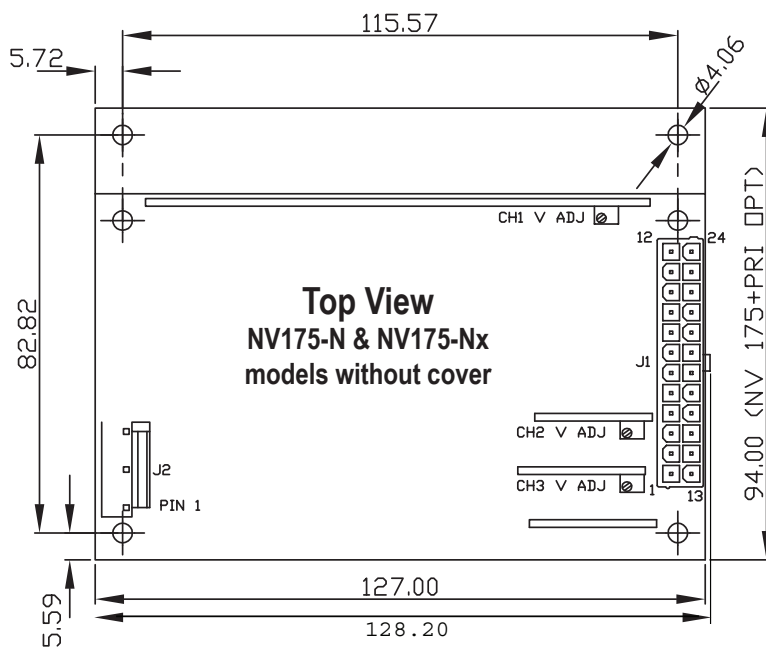


MATING PARTS (MOLEX OR EQUIVALENT)

| CONN | HOUSING    | PINS       |
|------|------------|------------|
| J1   | 39-01-2245 | 44476-3112 |
| J2   | 09-50-8051 | 08-52-0113 |

Input and output connectors are not included with the product. They are available from TDK-Lambda

| Part Number | Contents                             |
|-------------|--------------------------------------|
| 94910       | 1 off input connector and 3 crimps   |
| 94911       | 1 off output connector and 24 crimps |

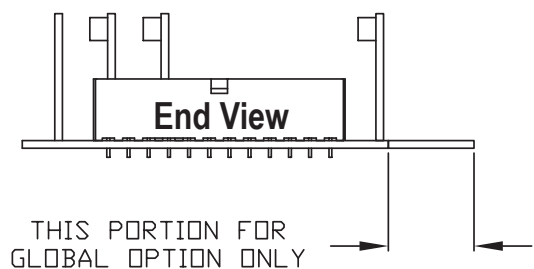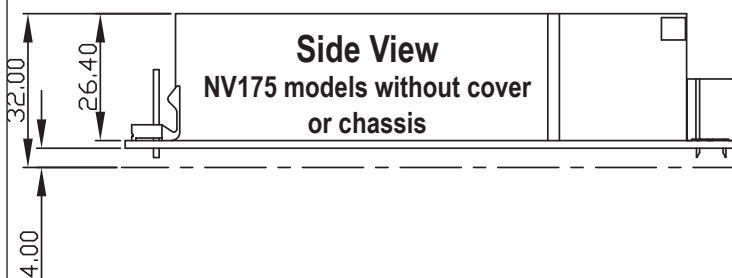


Notes: 1. All customer fixings M3

2. Maximum thread penetration 4.5mm


3. Maximum torque 0.9Nm

4. All tolerances +/-0.5mm

## Outline & Connection Drawings

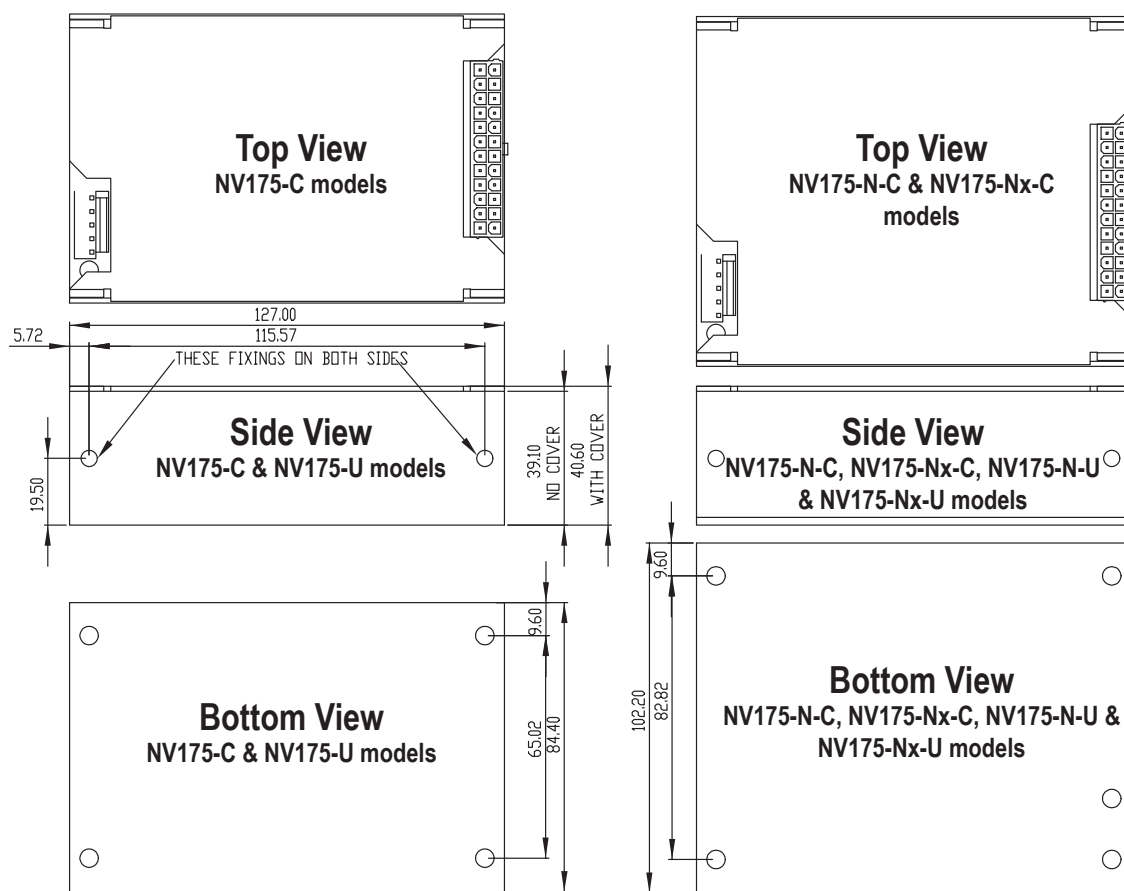

## NV-175 units with fan (-F or -I)

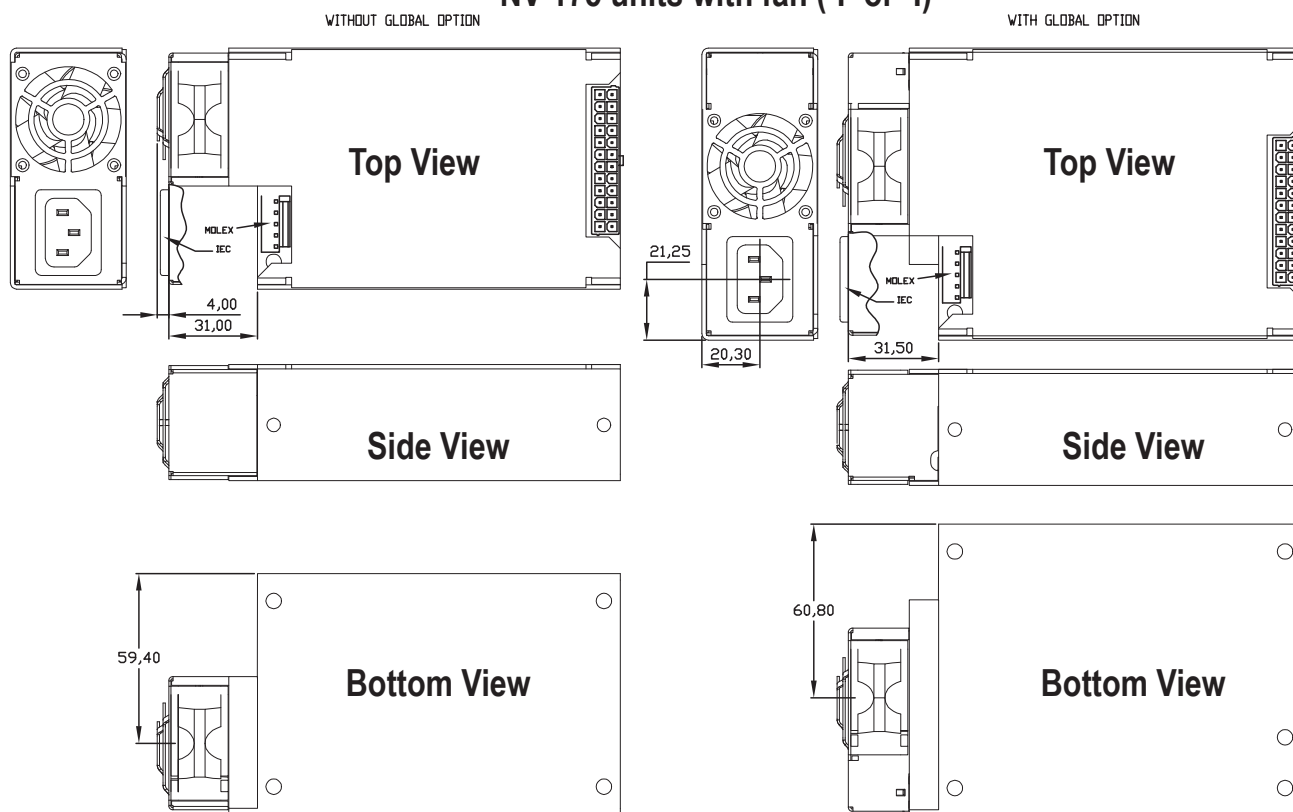

Other dimensions same as cases without fans (above)

Notes: 1. All customer fixings M3

2. Maximum thread penetration 4.5mm

3. Maximum torque 0.9Nm

4. All tolerances +/-0.5mm



## TDK-Lambda France SAS

Tel: +33 1 60 12 71 65  
france@fr.tdk-lambda.com  
www.emea.lambda.tdk.com/fr



## Italy Sales Office

Tel: +39 02 61 29 38 63  
info.italia@it.tdk-lambda.com  
www.emea.lambda.tdk.com/it



## Netherlands

info@nl.tdk-lambda.com  
www.emea.lambda.tdk.com/nl



## TDK-Lambda Germany GmbH

Tel: +49 7841 666 0  
info.germany@de.tdk-lambda.com  
www.emea.lambda.tdk.com/de



## Austria Sales Office

Tel: +43 2256 655 84  
info@at.tdk-lambda.com  
www.emea.lambda.tdk.com/at




## Switzerland Sales Office

Tel: +41 44 850 53 53  
info@ch.tdk-lambda.com  
www.emea.lambda.tdk.com/ch



## Nordic Sales Office

Tel: +45 8853 8086  
info@dk.tdk-lambda.com  
www.emea.lambda.tdk.com/dk



## TDK-Lambda UK Ltd.

Tel: +44 (0) 12 71 85 66 66  
powersolutions@uk.tdk-lambda.com  
www.emea.lambda.tdk.com/uk



## TDK-Lambda Ltd.

Tel: +9 723 902 4333  
info@tdk-lambda.co.il  
www.emea.lambda.tdk.com/il



## C.I.S.

### Commercial Support:

Tel: +7 (495) 665 2627

### Technical Support:

Tel: +7 (812) 658 0463  
info@tdk-lambda.ru  
www.emea.lambda.tdk.com/ru



## TDK-Lambda Americas

Tel: +1 800-LAMBDA-4 or 1-800-526-2324  
powersolutions@us.tdk-lambda.com  
www.us.lambda.tdk.com



## TDK Electronics do Brasil Ltda

Tel: +55 11 3289-9599  
sales.br@tdk-electronics.tdk.com  
www.tdk-electronics.tdk.com/en



## TDK-Lambda Corporation

Tel: +81-3-6778-1113  
www.jp.lambda.tdk.com



## TDK-Lambda (China) Electronics Co. Ltd.

Tel: +86 21 6485-0777  
powersolutions@cn.tdk-lambda.com  
www.lambda.tdk.com.cn



## TDK-Lambda Singapore Pte Ltd.

Tel: +65 6251 7211  
tls.mkt@sg.tdk-lambda.com  
www.sg.lambda.tdk.com



## TDK India Private Limited, Power Supply Division

Tel: +91 80 4039-0660  
mathew.philip@in.tdk-lambda.com  
www.sg.lambda.tdk.com



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## TDK-Lambda:

[NV1250T0NC](#) [NV1350FF](#) [NV1350FFC](#) [NV1350FFN](#) [NV1350FFNC](#) [NV1350TT](#) [NV1350TTN](#) [NV1452FF](#)  
[NV1452FFC](#) [NV1452FFN](#) [NV1452FFNC](#) [NV1452TT](#) [NV1452TTC](#) [NV1452TTN](#) [NV1452TTNC](#) [NV1453FF](#)  
[NV1453FFC](#) [NV1453TTC](#) [NV1453TTN](#) [NV1453TTN3](#) [NV1453TTNC](#) [NV14G5FF](#) [NV14G5FFN3](#) [NV14G5TTN3](#)  
[NV1250T0](#) [NV1453FFN](#) [NV11T000](#) [NV11G000](#) [NV1250T0C](#) [NV1453FFNC](#) [NV14G5TT](#) [NV1453FFN3](#) [NV1250T0N](#)  
[NV1350TTC](#) [NV1453TT](#) [NV1350TTNC](#) [NV11G000HF](#) [NV11T000HF](#) [NV14G5TTHF](#) [NV14G5FFHF](#)  
[NV11G000HN3F](#) [NV1250T0HF](#) [NV1-453GFHP](#) [NV1-250TY0HNI](#) [NV1-3G5T0](#) [NV1453TTN3C](#) [NV12G005HP](#) [NV1-](#)  
[3F505H](#) [NV1-453FFH](#) [NV1-4T5FF-C](#)