



2 year warranty

■ Model name

PAH 75 D 48-5033/

Series Name	Output type D: Dual type	Rated output voltage CH1: 5V CH2: 3.3V	Option:
Output Wattage	Rated input voltage		blank: On/Off control minus logic OVP manual reset P: On/Off control plus logic OVP manual reset V: On/Off control minus logic OVP auto-recovery PV: On/Off control plus logic OVP auto-recovery Z: Trim compatible type (PAH75D48-3325_5033)

■ Features

- Half-Brick Dual Output DC-DC Power Module
- Standardized pin disposition and size for "Half-Brick"DC-DC Converter in European and American telecom industries applied
- High power density achieved by our original ASIC and sophisticated design
- Wide input voltage range: DC36 ~ 76V
- Wide operation temperature range:
 - 1) Base plate temperature range: -40 ~ +100°C
 - 2) Conduction cooling system available for adjusting radiating method conforming to the shape of the devices
- Various Option
 - 1) On/Off control (plus logic/minus logic)
 - 2) Overvoltage protection reset (auto-recovery/manual reset)
- 2 year warranty

■ Specifications

1. Input voltage range	PAH75D24: 18 ~ 36VDC, PAH75D48: 36 ~ 76VDC
2. Output voltage range	± 10%
3. Parallel operation	-
4. Line regulation	0.2% , within nominal input voltage range at constant load
5. Load regulation	0.5% , no load to full load at constant input voltage
6. Cooling	Conduction cooling
7. Operating ambient temperature	-40°C ~ +100°C (Baseplate) Ambient temperature min=-40°C Output Derating : -40 ~ +100°C (Baseplate) 100%
8. Withstand voltage	Input-output : 1.5kVAC (20mA) , Input-chassis : 1.5kVAC (20mA) , Output-chassis : 500VAC (100mA) for 1 min
9. Safety standard	Approved by UL1950  , CSA950(C-UL)  and EN60950(BSI) 
10. CE marking	Conforms to low voltage directive
11. Functions	Over voltage protection,Over current protection,Remote on/off control


■ Product lineup

Model name	CH	Output voltage	Output current	Output power	UL	CSA	EN
PAH75D24-3325 (input 24VDC)	CH1(Vo1)	3.3V	15.0A	60W	○	○	○
	CH2(Vo2)	2.5V	15.0A				
PAH75D24-5033 (input 24VDC)	CH1(Vo1)	5.0V	15.0A	75W	○	○	○
	CH2(Vo2)	3.3V	15.0A				
PAH75D48-2518 (input 48VDC)	CH1(Vo1)	2.5V	15.0A	45W	○	○	○
	CH2(Vo2)	1.8V	15.0A				
PAH75D48-3318 (input 48VDC)	CH1(Vo1)	3.3V	15.0A	50W	○	○	○
	CH2(Vo2)	1.8V	15.0A				
PAH75D48-3325 (input 48VDC)	CH1(Vo1)	3.3V	15.0A	60W	○	○	○
	CH2(Vo2)	2.5V	15.0A				
PAH75D48-5033 (input 48VDC)	CH1(Vo1)	5.0V	15.0A	75W	○	○	○
	CH2(Vo2)	3.3V	15.0A				

- Request customer specification for further details of specifications, outline, characteristics, etc. Read the instruction manual before usage.
- Contact us about delivery before ordering.

○ : Safety standard approved

- Outline drawing

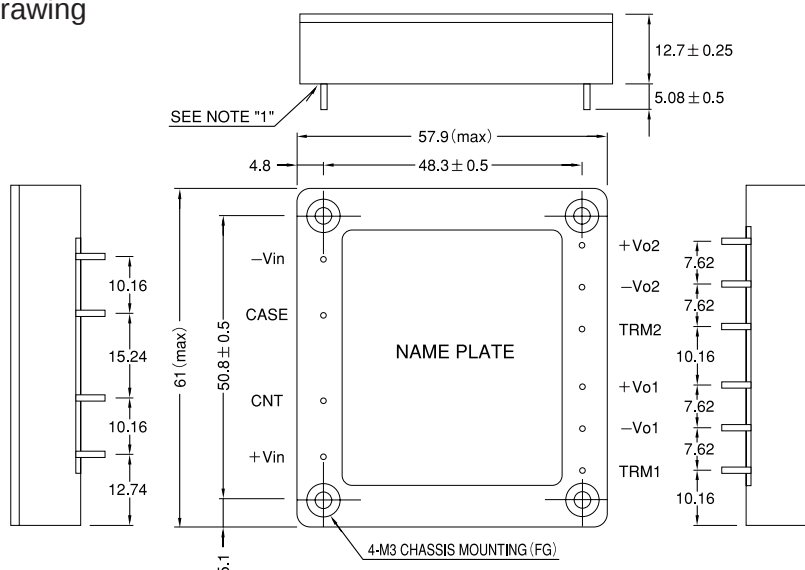

Note 1: Input & output terminal.....10-01

(Unit: mm)

●Recommended
Heatsink P213

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TDK-Lambda:

[PAH75D24-3325](#) [PAH75D24-3325/P](#) [PAH75D24-5033](#) [PAH75D24-5033/V](#) [PAH75D48-2518](#) [PAH75D48-2518/V](#)
[PAH75D48-3318](#) [PAH75D48-3318/PV](#) [PAH75D48-3318/V](#) [PAH75D48-3325](#) [PAH75D48-3325/P](#) [PAH75D48-3325/V](#)
[PAH75D48-5033](#) [PAH75D48-5033/V](#) [PAH75D48-2518/PV](#) [PAH75D24-3325/PV](#) [PAH75D24-5033/P](#) [PAH75D48-](#)
[3325/PV](#) [PAH75D24-3325/V](#) [PAH75D48-5033/P](#)