

# Series 2380

# Programmable DC Electronic Loads



- 200W, 250W, and 750W models
- Supports up to 500V or 60A
- Constant current (CC), constant voltage (CV), constant resistance (CR), and constant power (CP) operating modes
- LED simulated load test mode
- Readback voltage and current resolution down to 0.1mV/0.01mA
- Dynamic mode with cycle rate up to 25kHz
- Voltage rise and fall time measurement
- Current monitor function
- List mode
- Battery test mode
- Built-in GPIB, USB, and RS-232 interfaces

as fast as 25kHz. Versatile internal, external, and remote triggering options allow synchronizing the dynamic load behavior with other events.

## Comprehensive Protection

Protection functions built into Series 2380 DC electronic loads ensure the reliability and safety of all tests. These functions include over temperature protection (OTP), over voltage protection (OVP), over current protection (OCP), over power protection (OPP), and local/remote reverse voltage (LRV/RRV) protection. A power-on system self-test ensures the instrument is operating properly.

## Full Complement of Settings and Controls

To maximize testing efficiency, you can save test parameters into any one of 100 memory locations for quick recall. All load parameters, such as voltage, current, slew rate, and dynamic mode time intervals, can be set using the front panel controls or programmed remotely. A numeric keypad and rotary knob allow entering settings quickly and setting parameters to their full resolution easily. USB-TMC, GPIB and RS-232 interfaces are built in for remote control and communication. A current monitor interface simplifies monitoring input current waveforms by providing a connection for an oscilloscope.



Figure 1. Use either the rotary knob or the keypad to quickly enter settings and set parameter values using all the available resolution.

# 2380

## Programmable DC Electronic Loads

### Ordering Information


2380-500-15	Programmable DC Electronic Load, 500V, 15A, 200W
2380-120-60	Programmable DC Electronic Load, 120V, 60A, 250W
2380-500-30	Programmable DC Electronic Load, 500V, 30A, 750W
2380J-500-15	Programmable DC Electronic Load, 500V, 15A, 200W-Japan only
2380J-120-60	Programmable DC Electronic Load, 120V, 60A, 250W-Japan only
2380J-500-30	Programmable DC Electronic Load, 500V, 30A, 750W-Japan only

### Accessories Supplied

Quick Start Guide  
Documentation CD  
Power cord

### APPLICATIONS


- Environmental test, stress test, and accelerated life testing for AC/DC power sources and DC/DC modules
- LED lighting drivers and high power component testing
- Automotive electronics testing
- Battery research and discharge testing
- Production test

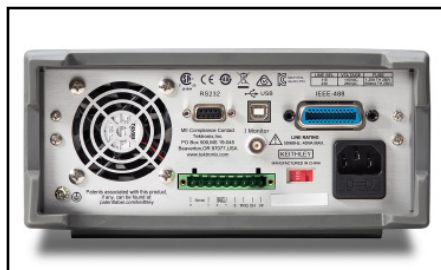

Model 2380-500-15 rear panel



Model 2380-500-15 front view showing the safety covers on the input terminals.

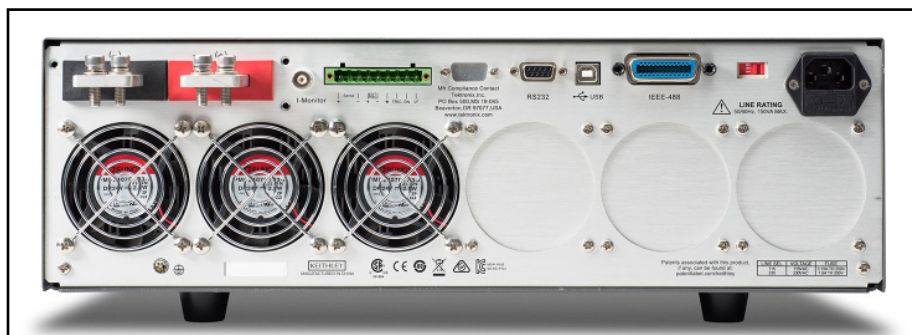

Model 2380-500-30 rear panel

### ACCESSORIES AVAILABLE

2380-001	9-pin Rear Panel Mating Connector
2380-002	DUT Connection Protective Cover
7007-2	Double-Shielded Premium IEEE-488 Interface Cable, 2m (6.5 ft)
KP-CL-488LPA	IEEE-488.2 Interface Board for the PCI Bus
USB-B-1	USB Cable, Type A Connector to Type B Connector, 1m (3.3 ft)

### RACK MOUNT KITS FOR THE 2380-500-15 AND THE 2380-120-60

4299-7	Universal Fixed Rack Mount Kit
RMU2U	Fixed Rack Mount Kit
386759800	RMU2U Rack Mount Cosmetic Filler Panel

### RACK MOUNT KIT FOR THE 2380-500-30

2380-RM	Full-Rack-Width Instrument Fixed Rack Mount Kit
---------	---

### SERVICES AVAILABLE

Model Number*-1-EW	3-year factory warranty from date of shipment extended 1 additional year
Model Number*-5Y-EW	3-year factory warranty from date of shipment extended to 5 years
C/Model Number*-3Y-STD	KeithleyCare 3 YR STD Calibration Plan
C/Model Number*-3Y-DAT	KeithleyCare 3 YR Calibration w/Data Plan
C/Model Number*-5Y-STD	KeithleyCare 5 YR STD Calibration Plan
C/Model Number*-5Y-DAT	KeithleyCare 5 YR Calibration w/Data Plan

\* Replace the specific power supply model number in place of Model Number to generate the appropriate model number for a service item. Example for a 2380-500-15, a 1-year extended warranty model number would be 2380-500-15-EW.

## Specifications

## Model 2380-500-15/2380J-500-15

		Low Range	High Range
Rated Value (0°–40°C)	Input Voltage	0–500 V	0–500 V
	Input Current	0–3 A	0–15 A
	Input Power	200 W	200 W
	Min. Operating Voltage	0.6 V at 3 A (maximum 0.9 V)	4.5 V at 15 A
Constant Voltage Mode	Range	0.1–50 V	0.1–500 V
	Resolution	1 mV	10 mV
	Accuracy	±(0.05% + 0.025% FS)	±(0.05% + 0.025% FS)
Constant Current Mode	Range	0–3 A	0–15 A
	Resolution	0.1 mA	1 mA
	Accuracy	±(0.05% + 0.05% FS)	±(0.05% + 0.05% FS)
Constant Resistance Mode <sup>1</sup>	Range	0.3 Ω–10 Ω	10 Ω–7.5 kΩ
	Resolution	0.001 Ω	0.1 Ω
	Accuracy <sup>2</sup>	0.01% + 0.08 S	0.01% + 0.0008 S
Constant Power Mode <sup>3</sup>	Range	200 W	200 W
	Resolution	10 mW	10 mW
	Accuracy	0.1% + 0.1% FS	0.1% + 0.1% FS
<b>Dynamic Mode</b>			
CC Mode	T1 & T2	20 μs–3600 s; Res: 1 μs	20 μs–3600 s; Res: 1 μs
	Accuracy	5 μs ± 100 ppm	5 μs ± 100 ppm
	Ascending/Descending Slope <sup>4</sup>	0.0001–0.1 A/μs	0.001–1 A/μs
	Minimum Rise Time <sup>5</sup>	~10 μs	~10 μs
<b>Measuring Range</b>			
Readback Voltage	Range	0–50 V	0–500 V
	Resolution	1 mV	10 mV
	Accuracy	±(0.025% + 0.025% FS)	±(0.025% + 0.025% FS)
Readback Current	Range	0–3 A	0–15 A
	Resolution	0.01 mA	0.1 mA
	Accuracy	±(0.05% + 0.05% FS)	±(0.05% + 0.05% FS)
Readback Power	Range	200 W	200 W
	Resolution	10 mW	10 mW
	Accuracy	±(0.1% + 0.1% FS)	±(0.1% + 0.1% FS)
<b>Protection Range</b>			
Overpower Protection		~210 W	~210 W
Overcurrent Protection		~3.3 A	~16.5 A
Overvoltage Protection		~530 V	~530 V
Over Temperature Protection		~85°C	~85°C
<b>Specification</b>			
Short Circuit	Current (CC)	~3.3 / 3 A	~16.5 / 15 A
	Voltage (CV)	~0 V	~0 V
	Resistance (CR)	~300 mΩ	~300 mΩ
Input Terminal Impedance		~1 MΩ	~1 MΩ
Dimensions		214.81mm × 104.24mm × 397.03mm	

## Model 2380-120-60/2380J-120-60

		Low Range	High Range
Rated Value (0°–40°C)	Input Voltage	0–120 V	0–120 V
	Input Current	0–6 A	0–60 A
	Input Power	250 W	250 W
	Min. Operating Voltage	0.18 V at 6 A	1.8 V at 60 A
Constant Voltage Mode	Range	0–18 V	0–120 V
	Resolution	1 mV	10 mV
	Accuracy	±(0.05% + 0.025% FS)	±(0.05% + 0.025% FS)
Constant Current Mode	Range	0–6 A	0–60 A
	Resolution	0.1 mA	1 mA
	Accuracy	±(0.05% + 0.1% FS)	±(0.05% + 0.1% FS)
Constant Resistance Mode <sup>1</sup>	Range	0.05 Ω–10 Ω	10 Ω–7.5 kΩ
	Resolution	0.001 Ω	0.1 Ω
	Accuracy <sup>2</sup>	0.01% + 0.08 S	0.01% + 0.0008 S
Constant Power Mode <sup>3</sup>	Range	250 W	250 W
	Resolution	10 mW	10 mW
	Accuracy	0.2% + 0.2% FS	0.2% + 0.2% FS
<b>Dynamic Mode</b>			
CC Mode	T1 & T2	20 μs–3600 s; Res: 1 μs	20 μs–3600 s; Res: 1 μs
	Accuracy	5 μs ± 100 ppm	5 μs ± 100 ppm
	Ascending/Descending Slope <sup>4</sup>	0.0001–0.25 A/μs	0.001–2.5 A/μs
	Minimum Rise Time <sup>5</sup>	~20 μs	~20 μs
<b>Measuring Range</b>			
Readback Voltage	Range	0–18 V	0–120 V
	Resolution	0.1 mV	1 mV
	Accuracy	±(0.025% + 0.025% FS)	±(0.025% + 0.025% FS)
Readback Current	Range	0–6 A	0–60 A
	Resolution	0.1 mA	1 mA
	Accuracy	±(0.05% + 0.1% FS)	±(0.05% + 0.1% FS)
Readback Power	Range	250 W	250 W
	Resolution	10 mW	10 mW
	Accuracy	±(0.2% + 0.2% FS)	±(0.2% + 0.2% FS)
<b>Protection Range</b>			
Overpower Protection		~260 W	~260 W
Overcurrent Protection		~6.6 A	~66 A
Overvoltage Protection		~130 V	~130 V
Over Temperature Protection		~85°C	~85°C
<b>Specification</b>			
Short Circuit	Current (CC)	~6.6 / 6 A	~66 / 60 A
	Voltage (CV)	0 V	0 V
	Resistance (CR)	~30 mΩ	~30 mΩ
Input Terminal Impedance		~300 kΩ	~300 kΩ
Dimensions		214.81mm × 104.24mm × 397.03mm	

## NOTES\*

1. The voltage/current input is no less than 10% FS (FS indicates the full scale). Accuracy is defined as: % of reading + % of full scale.
2. The range of read-back resistance is between  $(1/(1/R + (1/R) \cdot 0.01\% + 0.08) \Omega)$  and  $1/(1/R - (1/R) \cdot 0.01\% - 0.08) \Omega$ .
3. The voltage/current input is no less than 10% FS.
4. Ascending/descending slope: 10%–90% current ascending slope from 0 to maximum current.
5. Minimum rise time: 10%–90% current rise time.

\*Specifications are subject to change without notice.

## Model 2380-500-30/2380J-500-30

		Low Range	High Range
Rated Value (0°–40°C)	Input Voltage	0–500 V	0–500 V
	Input Current	0–3 A	0–30 A
	Input Power	750 W	750 W
	Min. Operating Voltage	0.36 V / 3 A	3.6 V / 30 A
Constant Voltage Mode	Range	0–50 V	0–500 V
	Resolution	1 mV	10 mV
	Accuracy	$\pm(0.025\% + 0.05\% \text{ FS})$	$\pm(0.025\% + 0.05\% \text{ FS})$
Constant Current Mode	Range	0–3 A	0–30 A
	Resolution	0.1 mA	1 mA
	Accuracy	$\pm(0.05\% + 0.05\% \text{ FS})$	$\pm(0.05\% + 0.05\% \text{ FS})$
Constant Resistance Mode <sup>1</sup>	Range	0.15 $\Omega$ –10 $\Omega$	10 $\Omega$ –7.5 k $\Omega$
	Resolution	0.001 $\Omega$	0.1 $\Omega$
	Accuracy <sup>2</sup>	0.01% + 0.08 S	0.01% + 0.0008 S
Constant Power Mode <sup>3</sup>	Range	750 W	750 W
	Resolution	10 mW	10 mW
	Accuracy	0.2% + 0.2% FS	0.2% + 0.2% FS

Dynamic Mode			
CC Mode	T1 & T2	20 $\mu$ s–3600 s; Res: 1 $\mu$ s	20 $\mu$ s–3600 s; Res: 1 $\mu$ s
	Accuracy	5 $\mu$ s $\pm$ 100 ppm	5 $\mu$ s $\pm$ 100 ppm
	Ascending/Descending Slope <sup>4</sup>	0.0001–0.1 A/ $\mu$ s	0.001–1 A/ $\mu$ s
	Minimum Rise Time <sup>5</sup>	~20 $\mu$ s	~20 $\mu$ s

Measuring Range			
Readback Voltage	Range	0–50 V	0–500 V
	Resolution	1 mV	10 mV
	Accuracy	$\pm(0.025\% + 0.025\% \text{ FS})$	$\pm(0.025\% + 0.025\% \text{ FS})$
Readback Current	Range	0–3 A	0–30 A
	Resolution	0.1 mA	1 mA
	Accuracy	$\pm(0.05\% + 0.05\% \text{ FS})$	$\pm(0.05\% + 0.05\% \text{ FS})$
Readback Power	Range	750 W	750 W
	Resolution	10 mW	10 mW
	Accuracy	$\pm(0.2\% + 0.2\% \text{ FS})$	$\pm(0.2\% + 0.2\% \text{ FS})$

Protection Range		
Overpower Protection	~760 W	~760 W
Overcurrent Protection	~3.3 A	~33 A
Overvoltage Protection	~530 V	~530 V
Over Temperature Protection	~85°C	~85°C

Specification		
Short Circuit	Current (CC)	~3.3 / 3 A
	Voltage (CV)	0 V
	Resistance (CR)	~120 m $\Omega$
Input Terminal Impedance		1 M $\Omega$
Dimensions	482mm $\times$ 131.4mm $\times$ 580mm	

## General

**Memory Capacity:** 100 sets of measurements and selectable parameters.

**Signal Connections:**

**Front Panel:** Input: Stud and threaded knob terminals for lug connectors (200W and 250W versions).

**Rear Panel:**

**Input:** Terminal Bars (750W version).

**Current Monitor Output:** BNC.

**Remote Sense, Analog Input, External Trigger, Voltage Fault:** 9-pin terminal block.

**Communications:**

**USB:** USB2.0 device, type B, USB-TMC compliant.

**RS-232:** DB-9 connector.

**GPIO:** IEEE-488.2 compliant.

**Cooling Method:** Fan.**Fan Speed vs. Internal temperature:**

Temperature	40°C	50°C	70°C	85°C
Fan status	First gear	Second gear	Third gear	Temperature protection (OH) and load is shut off.

**Power Source:**

**AC Input:** Switchable between 120VAC nominal and 240VAC nominal.

**“J” versions:** 100VAC, nominal.

**Frequency:** 50/60Hz.**Power Consumption:**

**2380-500-15:** 40VA.

**2380-120-60:** 40VA.

**2380-500-30:** 150VA.

**EMC:** Conforms to European Union EMC Directive.

**Safety:**

**Canadian Certification:** CSA listed to UL Std. No. 61010-1(3rd Edition) and Can/CSA-C22.2 No. 61010-1-12.

**European Union Compliance:** Conforms to European Union Low Voltage Directive.

**Environment:**

**Altitude:** Operating: 2000m, (6562 ft) above sea level.

**Temperature and Relative Humidity:**

**Operating:** 0° to 40°C full accuracy with 80% relative humidity at up to 35°C, non-condensing.

**Storage:** –20° to 70°C, 10% to 85% relative humidity up to 40°C, 5% to 60% relative humidity above 40°C.

**Net Weight:**

**200W/250W Model:** 4.65kg.

**750W Model:** 24.95kg.

**Shipping Weight:**

**200W/250W Model:** 7kg.

**750W Model:** 31.75kg.

**Recommended calibration frequency:** 1 time/year.

**Warranty:** 3 years.

## NOTES\*

- The voltage/current input is no less than 10% FS (FS indicates the full scale). Accuracy is defined as: % of reading + % of full scale.
- The range of read-back resistance is between  $(1/(1/R + (1/R) \cdot 0.01\% + 0.08) \Omega)$  and  $1/(1/R - (1/R) \cdot 0.01\% - 0.08) \Omega$ .
- The voltage/current input is no less than 10% FS.
- Ascending/descending slope: 10%–90% current ascending slope from 0 to maximum current.
- Minimum rise time: 10%–90% current rise time.

\*Specifications are subject to change without notice.

## Contact Information:

**ASEAN / Australia** (65) 6356 3900  
**Austria** 00800 2255 4835  
**Balkans, Israel, South Africa and other ISE Countries** +41 52 675 3777  
**Belgium** 00800 2255 4835  
**Brazil** +55 (11) 3759 7627  
**Canada** 1 800 833 9200  
**Central East Europe and the Baltics** +41 52 675 3777  
**Central Europe & Greece** +41 52 675 3777  
**Denmark** +45 80 88 1401  
**Finland** +41 52 675 3777  
**France** 00800 2255 4835  
**Germany** 00800 2255 4835  
**Hong Kong** 400 820 5835  
**India** 000 800 650 1835  
**Italy** 00800 2255 4835  
**Japan** 81 (3) 6714 3010  
**Luxembourg** +41 52 675 3777  
**Mexico, Central/South America & Caribbean** 52 (55) 56 04 50 90  
**Middle East, Asia, and North Africa** +41 52 675 3777  
**The Netherlands** 00800 2255 4835  
**Norway** 800 16098  
**People's Republic of China** 400 820 5835  
**Poland** +41 52 675 3777  
**Portugal** 80 08 12370  
**Republic of Korea** 001 800 8255 2835  
**Russia & CIS +7 (495) 6647564**  
**South Africa** +41 52 675 3777  
**Spain** 00800 2255 4835  
**Sweden** 00800 2255 4835  
**Switzerland** 00800 2255 4835  
**Taiwan** 886 (2) 2656 6688  
**United Kingdom & Ireland** 00800 2255 4835  
**USA 1 800 833 9200**

Rev 0415

## For Further Information

Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Visit [www.tektronix.com](http://www.tektronix.com) or [www.keithley.com](http://www.keithley.com).

Copyright © 2015, Tektronix. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks or registered trademarks of their respective companies.

121715.KI

1KW-60327-0



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Keithley Instruments, Inc.:](#)

[2380-500-15](#) [2380-500-30](#) [2380-002](#)

[Tektronix:](#)

[2380-120-60](#)