


DIN Rail-Mounting Bracket for Digital Signage,
Version 1 - 41 mm mounting distance

MODEL NUMBER: B110-DIN-01

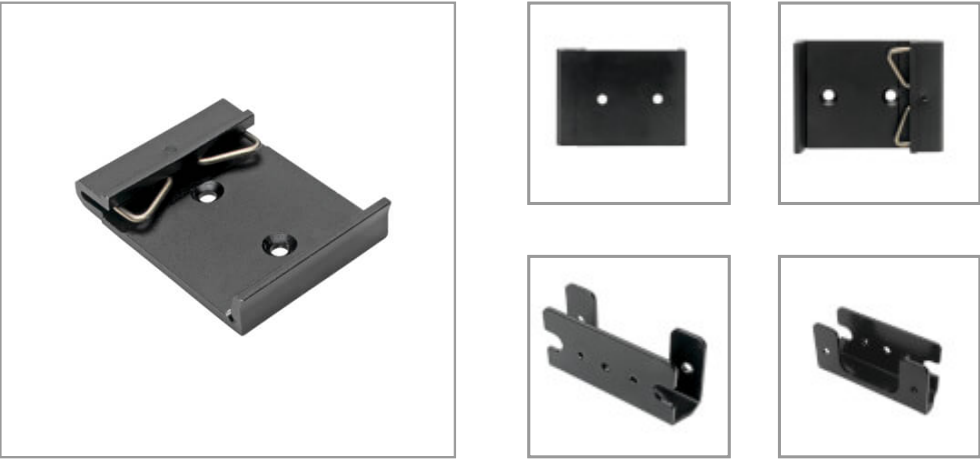

DIN rail bracket securely mounts select Tripp Lite extenders and other digital signage devices to a standard 35 mm DIN rail.

Features

DIN Mounting Bracket Ideal for Attaching Your Digital Signage Components to a DIN RailThis black aluminum DIN bracket is designed for securely mounting splitters, extenders and other select digital signage devices to any standard 35 mm DIN rail. Consisting of a durable U bracket and rail clip, the B110-DIN-01 firmly attaches to both lips of the DIN rail to prevent your mounted equipment from being jostled and connected cables from coming loose. It's an ideal accessory for setting up a digital signage system in restaurants, offices, banks, hotels, schools, doctor's offices and a wide range of retail establishments.

Simple Mounting Process Takes Just a Few MinutesJust use the included screws to attach the aluminum U bracket to the compatible device. Attach the aluminum rail clip to the bracket, and securely mount the unit on a 35 mm DIN rail, making sure the spring goes over the rail's top lip.

Compatible with a Wide Range of Digital Signage DevicesThis DIN rail-mounting bracket attaches to units with mounting holes spaced 41 millimeters apart. Select equipment includes the B126-Series, B130-Series, B140-Series and BHDBT-Series of transmitters, receivers and extenders.

Lifetime WarrantyThe B110-DIN-01 is backed by a lifetime warranty, ensuring reliability and performance.

Specifications

| OVERVIEW | |
|-----------------|-------------------------|
| UPC Code | 037332213907 |
| Accessory Type | Mounting Bracket |
| Technology | A/V over IP |
| Accessory Class | Audio Video Accessories |

Highlights

- Durable U bracket and rail clip mount firmly to any standard 35 mm DIN rail
- Holds digital signage device securely in place to prevent unwanted movement
- Easy to mount in just a few minutes, so you can get your system up and running quickly
- Fits digital signage components with mounting holes spaced 41 mm apart
- Includes all necessary mounting hardware for immediate DIN rail installation

Applications

- Mount a Tripp Lite transmitter, receiver or extender to a 35 mm DIN rail in a digital signage system

System Requirements

- Select digital signage device, including B126-, B130-, B140- and BHDBT-Series

Package Includes

- U bracket
- DIN rail clip
- (2) DIN rail screws
- (2) M3 x 5 mm mounting screws
- Installation guide

| PHYSICAL | |
|-------------------------------------|---------------------------|
| Color | Black |
| Material of Construction | Aluminum |
| Rackmountable | No |
| Shipping Dimensions (hwd / in.) | 4.72 x 3.14 x 0.98 |
| Shipping Dimensions (hwd / cm) | 12.00 x 8.00 x 2.50 |
| Shipping Weight (lbs.) | 0.17 |
| Shipping Weight (kg) | 0.08 |
| Unit Packaging Type | Box |
| FEATURES & SPECIFICATIONS | |
| IP68 Rated | No |
| IP20 Rated | No |
| Driver Required | No |
| STANDARDS & COMPLIANCE | |
| Product Compliance | RoHS; REACH |
| WARRANTY & SUPPORT | |
| Product Warranty Period (Worldwide) | Lifetime limited warranty |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Tripp Lite:](#)

[B110-DIN-01](#)