


## 14.5kW 3-Phase Monitored PDU, LX Interface, 200-240V Outlets (42 C13/6 C19), LCD, IEC 309 60A Blue, 3.05 m (10 ft.) Cord, 0U 1.8m/70in. Height, TAA

MODEL NUMBER: **PDU3EVN10G60B**

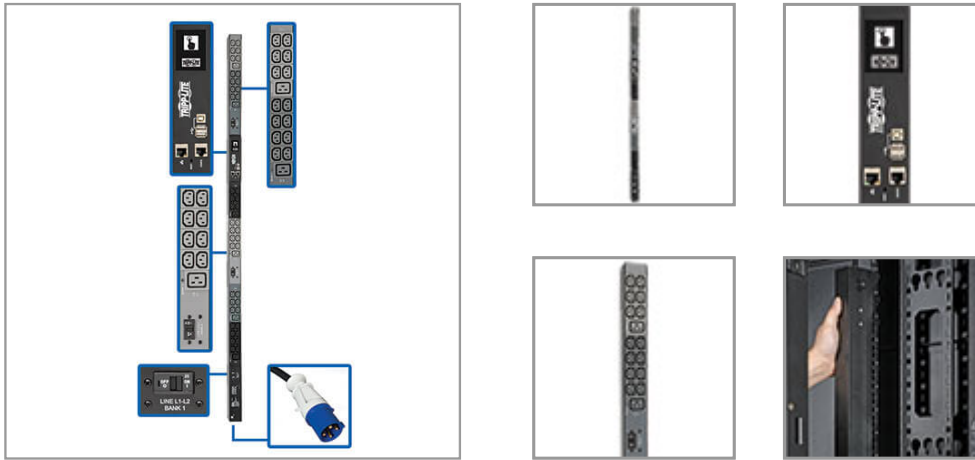

14.5kW 3-phase PDU with multifunction touchscreen LCD distributes and monitors AC power in an IT environment. Built-in Java-free network interface remotely monitors load levels to prevent overloads that cause downtime.

### Description

The PDU3EVN10G60B 14.5kW 3-Phase Monitored PDU provides real-time remote monitoring of voltage, frequency and load levels via built-in network connection. These advanced remote capabilities can save you money and reduce downtime.

Recommended for your IT or industrial application, the monitored PDU features 48 outlets—42 C13, 6 C19—with included plug-lock insert sleeves to prevent cables from becoming accidentally disconnected. A 10-ft. (3.05 m) cord with IEC 309 60A Blue (3P+E) input plug connects the 3-phase PDU to a compatible AC power source, generator or protected UPS.

The built-in Java-free HTML5-based LX Platform network interface enables full remote access for PDU status monitoring and email notifications via secure web browser, SNMP, telnet or SSH. It supports 10/100 Mbps auto-sensing for optimum communication with an Ethernet network. Optional EnviroSense2 modules (sold separately) provide a variety of environmental monitoring capabilities. Protocols supported include IPv4, IPv6, HTTP, HTTPS, SMTP, SNMPv1, SNMPv2, SNMPv3, telnet, SSH, FTP, DHCP and NTP.

A color touchscreen LCD lets you toggle between menus to input current level per phase and output current per load bank with  $\pm 1\%$  billing-grade accuracy, environmental sensor data and network information. It also generates a unique QR code to allow access to the PDU through a mobile device.

### Highlights

- 14.5kW 200-240V 3-phase 0U monitored PDU
- 48 outlets—42 C13, 6 C19—with plug-lock inserts
- Pre-installed WEBCARDLX with latest version of PADM20 for enhanced remote management
- IEC 309 60A Blue (3P+E) input with 10-ft. (3.05 m) AC power cord
- Touchscreen LCD with mobile access option via QR code

### Package Includes

- PDU3EVN10G60B 14.5kW 3-Phase Monitored PDU
- Built-in LX Platform interface
- Configuration cable
- (48) Plug-lock insert sleeves
- Rack-mounting hardware
- PDUMVROTATEBRKT mounting bracket accessory
- Owner's manual



**Tripp Lite**  
1111 W. 35th Street  
Chicago, IL 60609 USA  
Telephone: 773.869.1234  
www.tripplite.com

## Features

**Distributes and Monitors Network-Grade AC Power** 14.5kW 200-240V monitored PDU with 3-phase input IEC 309 60A Blue (3P+E) plug with 10-ft. (3.05 m) cord connects to compatible AC power source

Firmware upgrades support future product enhancements

**48 Outlets Distribute AC Power** 42 C13 and 6 C19 split into 3 separately breakered load banks Plug-lock insert sleeves prevent cables from becoming accidentally disconnected

**Color Touchscreen LCD** Reports network data, including IP address, input current level per phase and output current per load bank with  $\pm 1\%$  billing-grade accuracy Generates unique QR code for read-only access to PowerAlert® Device Manager via mobile device Full access available by logging into PowerAlert Device Manager via browser as user with read/write credentials

**Pre-Installed WEBCARDLX Network Interface Offers 24/7 Remote Access for Monitoring and Control**

The built-in WEBCARDLX with the latest version of PowerAlert Device Manager firmware (PADM20) provides enhanced remote management capabilities, including customizable dashboard graphs to fit user preferences. The PADM20 upgrade and Tripp Lite's PowerAlert Element Manager (PAEM) software form a powerful tool for expanding maintenance functions in large installations, including firmware update checks and backup and restoration of device configurations.

**Broad Communications Compatibility** Supports IPv4, IPv6, HTTP, HTTPS, SMTP, SNMPv1, SNMPv2, SNMPv3, telnet, SSH, FTP, DHCP and NTP Supports automatic and manual assignment of IP address

**Easy 0U Installation in EIA-Standard 19 in. Racks** Mounts vertically using included toolless buttons or rack-mounting brackets Included PDUMVROTATEBRKT allows mounting with rear-facing outlets

**TAA-Compliant** Compliant with the Federal Trade Agreements Act (TAA) for GSA Schedule purchases

## Specifications

OVERVIEW	
UPC Code	037332209351
PDU Type	Monitored
INPUT	
PDU Input Voltage	200-240V
Recommended Electrical Service	Three-phase 60A 200-240V service
Maximum Input Amps	35
PDU Plug Type	IEC-309 60A BLUE (3P+E)
Input Phase	3-Phase
Input Cord Length (ft.)	10
Input Cord Length (m)	3.05
OUTPUT	
Output Capacity Details	14.5kW (240V), 13.9kW (230V), 13.3kW (220V), 12.6kW (208V), 12.1kW (200V) total capacity; 20A max per breakered outlet bank; 16A max per C19 outlet; 12A max per C13 outlet
Frequency Compatibility	50 / 60 Hz
Output Receptacles	(42) C13; (6) C19
Output Nominal Voltage	200-240V
Overload Protection	3 20A circuit breakers, 1 per outlet bank
USER INTERFACE, ALERTS & CONTROLS	



**Tripp Lite**  
1111 W. 35th Street  
Chicago, IL 60609 USA  
Telephone: 773.869.1234  
[www.tripplite.com](http://www.tripplite.com)

Reported Load Segments	Reports input current per phase (L1, L2, L3) and output current for each breakered load bank (20A balanced max per banks B1-B3); Outlets are color-coded and labeled for phase and load bank identification; L1-L2 feeds black outlets (B1); L2-L3 feeds dark-gray outlets (B2); L3-L1 feeds light-gray outlets (B3)
Front Panel LCD Display	Touchscreen LCD reports NETWORK DATA (IP address, Subnet Mask, Gateway, MAC Address, Device Name, Model, Serial Number), INPUT PHASE DATA (Amperage, Wattage, Voltage per phase, plus Unbalance percentage), LOAD BANK DATA (Amperage, Wattage, Voltage per load bank, plus total PDU output in watts), CONFIGURATION DATA (Listing of current configuration settings), ENVIRONMENTAL DATA (Reports data and status of E2 sensor modules; Sensor options are available for temperature and humidity, plus input and output dry contacts), MOBILE ACCESS (Generates a unique QR code to view reported PDU details on a mobile device)
Current Measurement Accuracy (Amps)	+/-1%
Voltage Measurement Accuracy (Volts)	+/-1%
Power Measurement Accuracy (Watts)	+/-1%
<b>PHYSICAL</b>	
Form Factors Supported	Vertical rackmount installation supported with included mounting brackets; supports toolless mounting in button-mount compatible racks
Material of Construction	Metal
PDU Form Factor	Vertical (0U)
Shipping Dimensions (hwd / cm)	16.00 x 24.64 x 191.52
Shipping Dimensions (hwd / in.)	6.30 x 9.70 x 75.40
Shipping Weight (kg)	11.53
Shipping Weight (lbs.)	25.43
Unit Dimensions (hwd / cm)	177.8 x 5.5 x 6.3
Unit Dimensions (hwd / in.)	70 x 2.17 x 2.49
Unit Weight (kg)	8.46
Unit Weight (lbs.)	18.66
<b>ENVIRONMENTAL</b>	
Operating Temperature Range	0C ~ 50C (32F ~ 122F)
Storage Temperature Range	-30°C to +60°C (-22°F to +140°F)
Relative Humidity	5 to 95% non-condensing
<b>COMMUNICATIONS</b>	
SNMP Compatibility	Pre-installed LX platform network interface
<b>SPECIAL FEATURES</b>	
High Availability PDU Features	Auto Probe Monitoring (included)
<b>STANDARDS &amp; COMPLIANCE</b>	
Certifications	Tested to UL60950-1 (USA) CAN/CSA 60950-1 (Canada), NOM (Mexico), FCC Class A Part 15 (Emissions), ROHS, TAA Compliant



**Tripp Lite**  
1111 W. 35th Street  
Chicago, IL 60609 USA  
Telephone: 773.869.1234  
[www.tripplite.com](http://www.tripplite.com)

WARRANTY	
Product Warranty Period (Worldwide)	2-year limited warranty

© 2021 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies: <https://www.tripplite.com/products/product-certification-agencies>

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Tripp Lite:](#)

[PDU3EVN10G60B](#)