




CMD231C3

2-6 GHz Driver Amplifier

Product Overview

The CMD231C3 is a wideband GaAs MMIC driver amplifier housed in a leadless 3x3 mm surface mount package. The CMD231C3 is ideally suited for military, space and communications systems where small size and high linearity are needed. At 4 GHz the device delivers greater than 14.5 dB of gain with a corresponding output 1 dB compression point of +13.5 dBm and an output IP3 of 23.5 dBm. The CMD231C3 is a 50 ohm matched design which eliminates the need for external DC blocks and RF port matching.

Functional Block Diagram

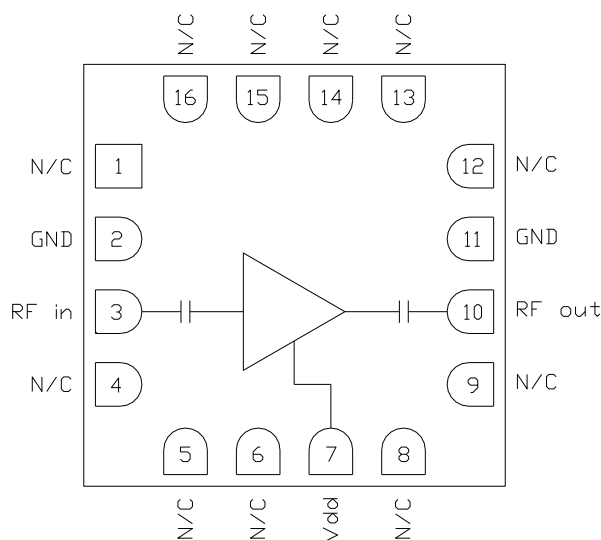

Key Features

- High Gain
- Single Positive Supply Voltage
- Low Current Consumption
- Pb-Free RoHS Compliant 3x3 QFN Package

Ordering Information

Part No.	Description
CMD231C3	2-6 GHz Driver Amplifier, 100 Piece 7" Reel
CMD231C3-EVB	Evaluation Board

Electrical Performance ($V_{dd} = 8.0 \text{ V}$, $T_A = 25 \text{ }^{\circ}\text{C}$, $F = 4 \text{ GHz}$)

Parameter	Min	Typ	Max	Units
Frequency Range		2 - 6		GHz
Gain		14.5		dB
Input Return Loss		15		dB
Output Return Loss		10		dB
Output P1dB		13.5		dBm
Output IP3		23.5		dBm
Supply Current		45		mA

Absolute Maximum Ratings

Parameter	Rating
Drain Voltage, V_{dd}	9 V
RF Input Power	+20 dBm
Channel Temperature, T_{ch}	150 °C
Power Dissipation, P_{diss}	919 mW
Thermal Resistance, θ_{JC}	70.7 °C/W
Operating Temperature	-55 to 85 °C
Storage Temperature	-55 to 150 °C

Exceeding any one or combination of the maximum ratings may cause permanent damage to the device.

Recommended Operating Conditions

Parameter	Min	Typ	Max	Units
V_{dd}	3.0	8.0	8.25	V
I_{dd}		45		mA


Electrical performance is measured at specific test conditions.
 Electrical specifications are not guaranteed over all recommended operating conditions.

Electrical Specifications ($V_{dd} = 8.0$ V, $T_A = 25$ °C)


Parameter	Min	Typ	Max	Units
Frequency Range		2 - 6		GHz
Gain	11.5	14.5	18	dB
Noise Figure		4.5		dB
Input Return Loss		15		dB
Output Return Loss		10		dB
Output P1dB	11	13.5		dBm
Output IP3		23.5		dBm
Supply Current	30	45	60	mA
Gain Temperature Coefficient		0.015		dB/°C
Noise Figure Temperature Coefficient		0.01		dB/°C

Typical Performance

Broadband Performance, $V_{dd} = 8.0\text{ V}$, $I_{dd} = 45\text{ mA}$, $T_A = 25\text{ °C}$

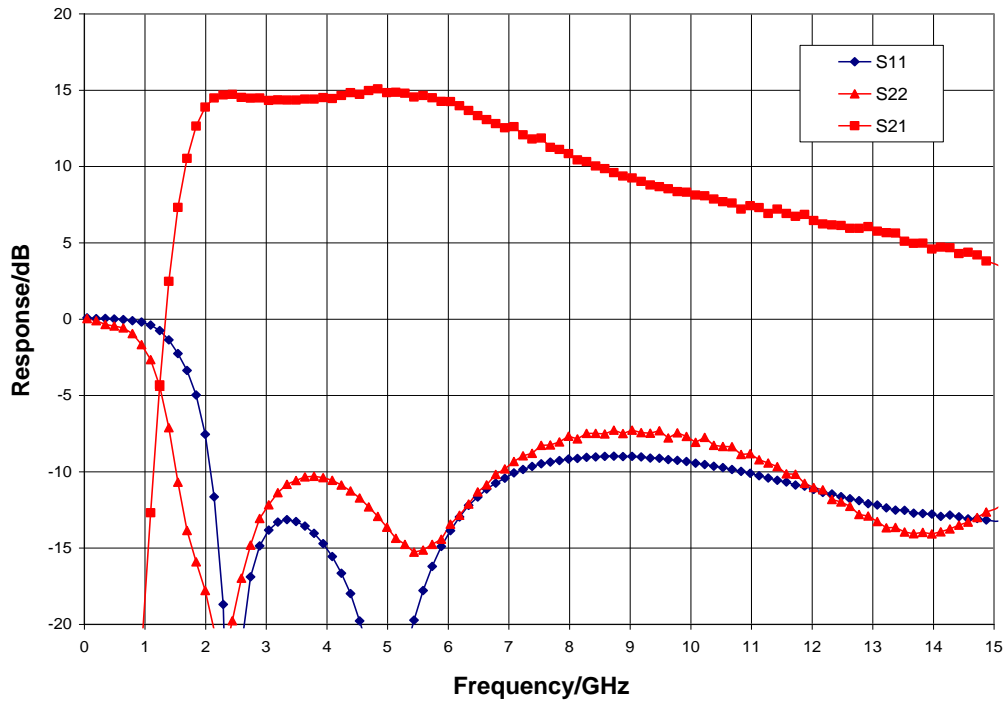


Narrow-band Performance, $V_{dd} = 8.0\text{ V}$, $I_{dd} = 45\text{ mA}$, $T_A = 25\text{ °C}$

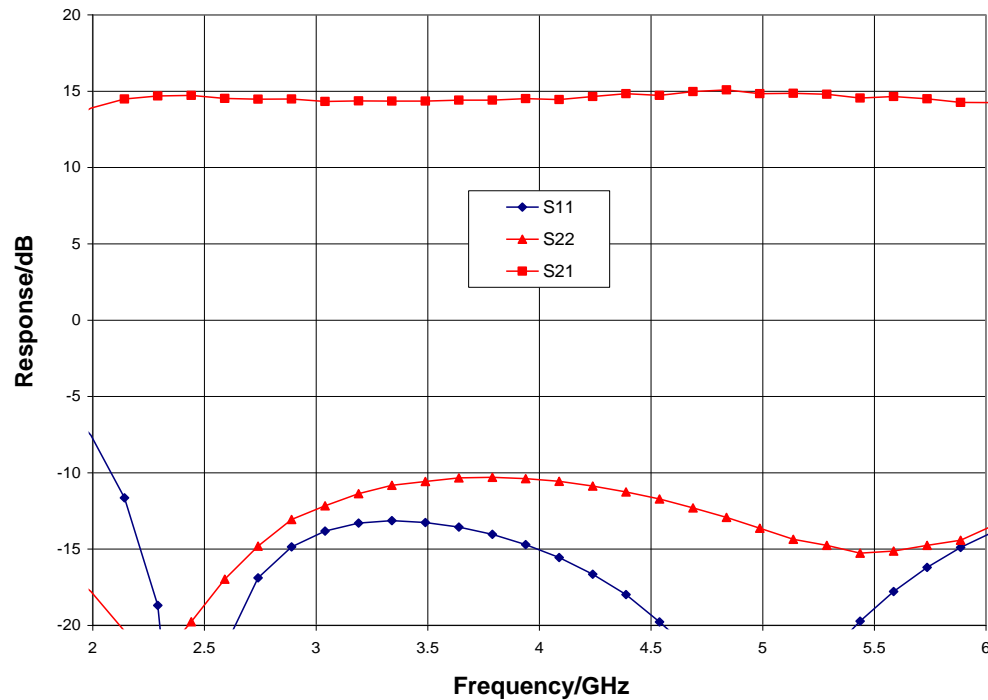


Typical Performance

Gain vs. Temperature, $V_{dd} = 8.0\text{ V}$

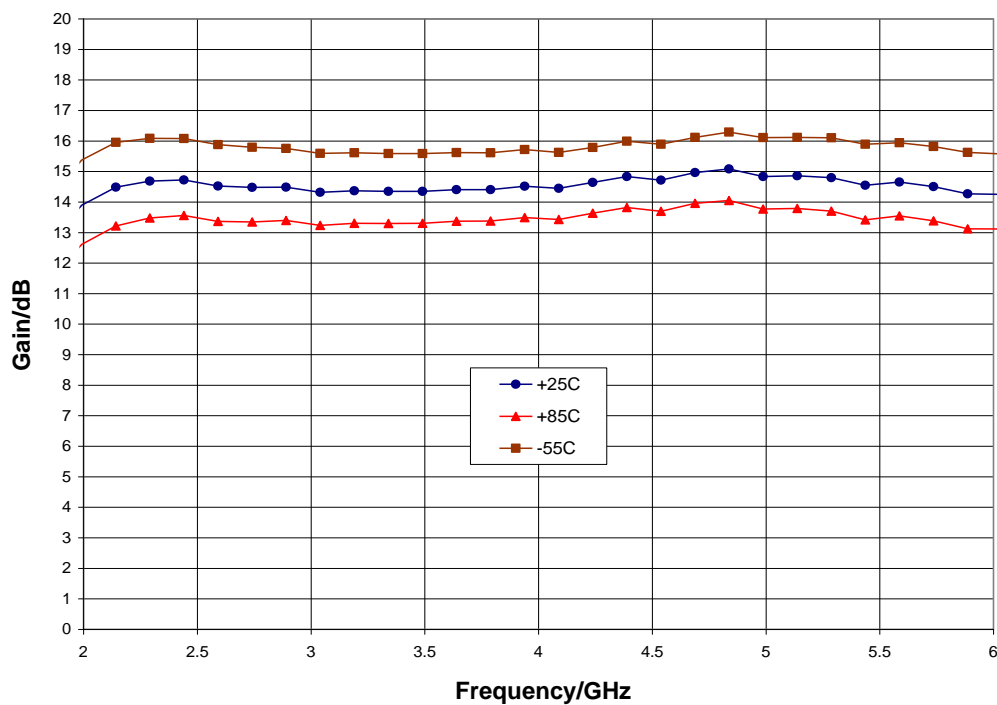


Gain vs. Supply Voltage, $T_A = 25\text{ °C}$

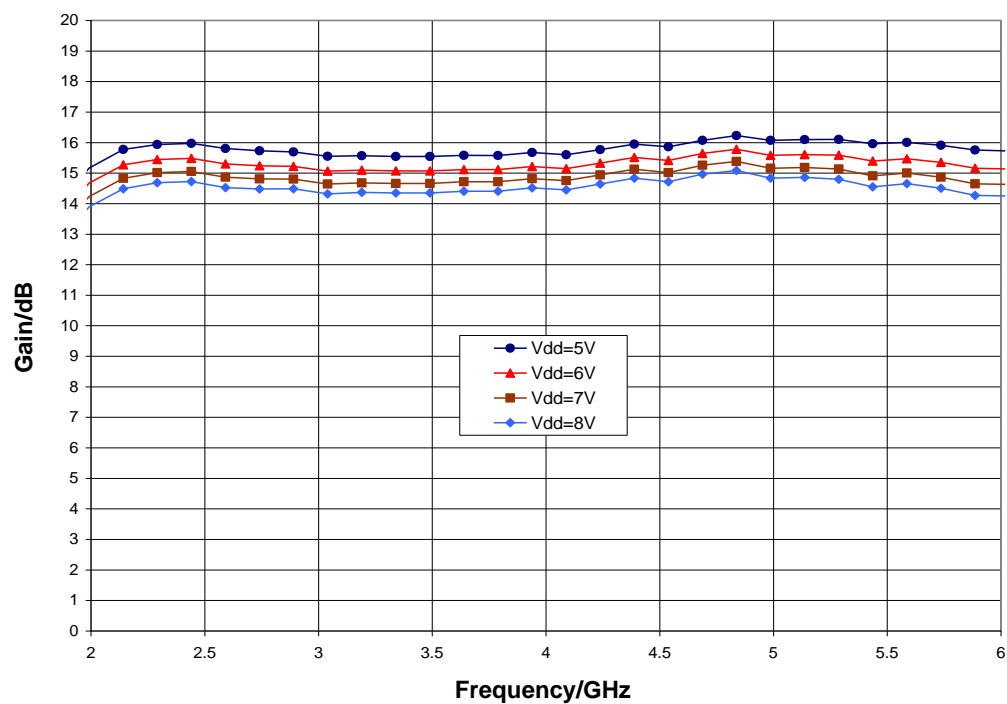


Typical Performance

Noise Figure vs. Temperature, $V_{dd} = 8.0\text{ V}$

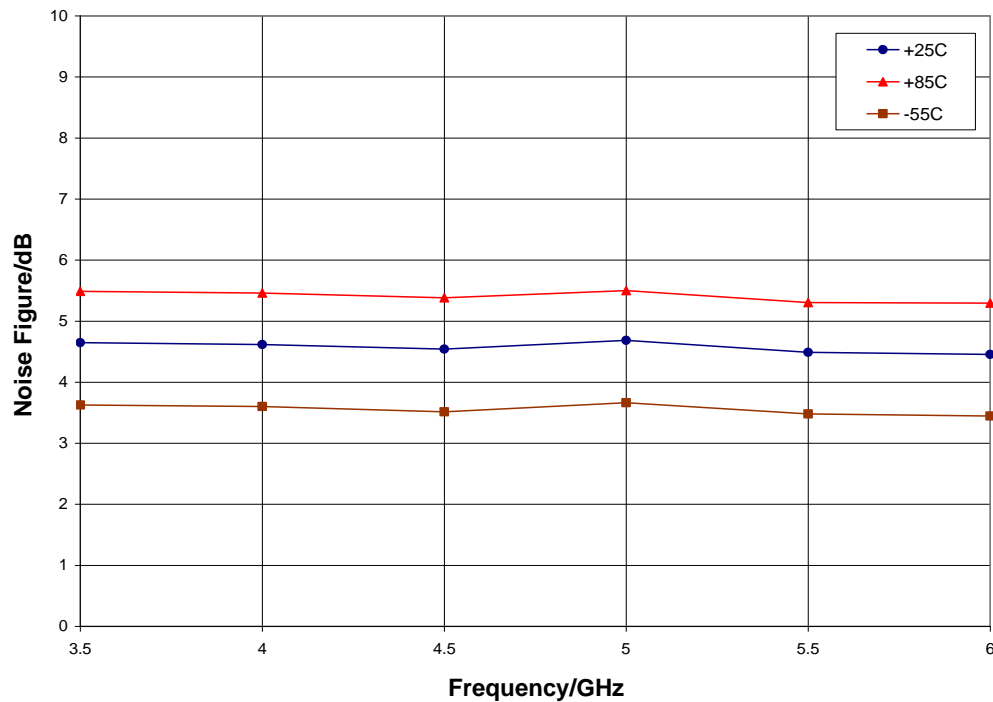


Noise Figure vs. Supply Voltage, $T_A = 25\text{ °C}$

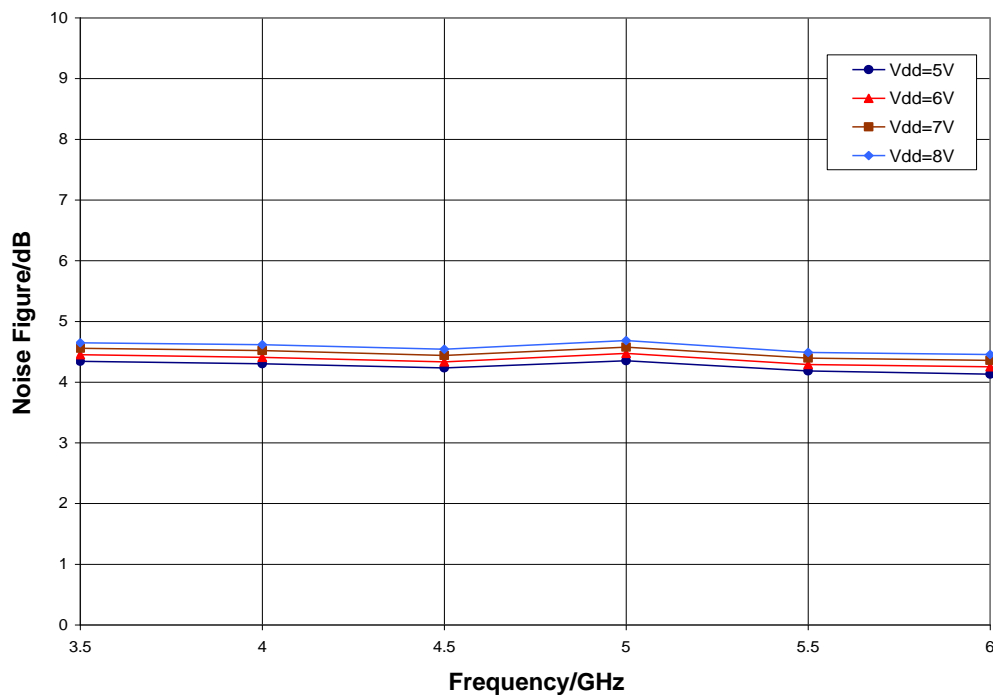


Typical Performance

P1dB vs. Temperature, $V_{dd} = 8.0\text{ V}$

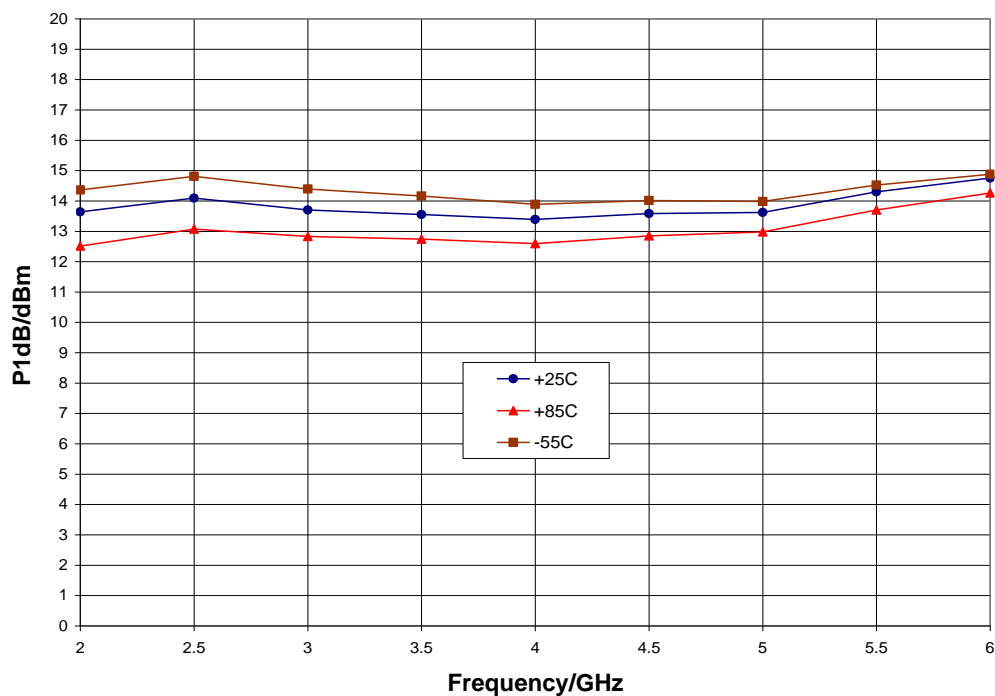


P1dB vs. Supply Voltage, $T_A = 25\text{ °C}$

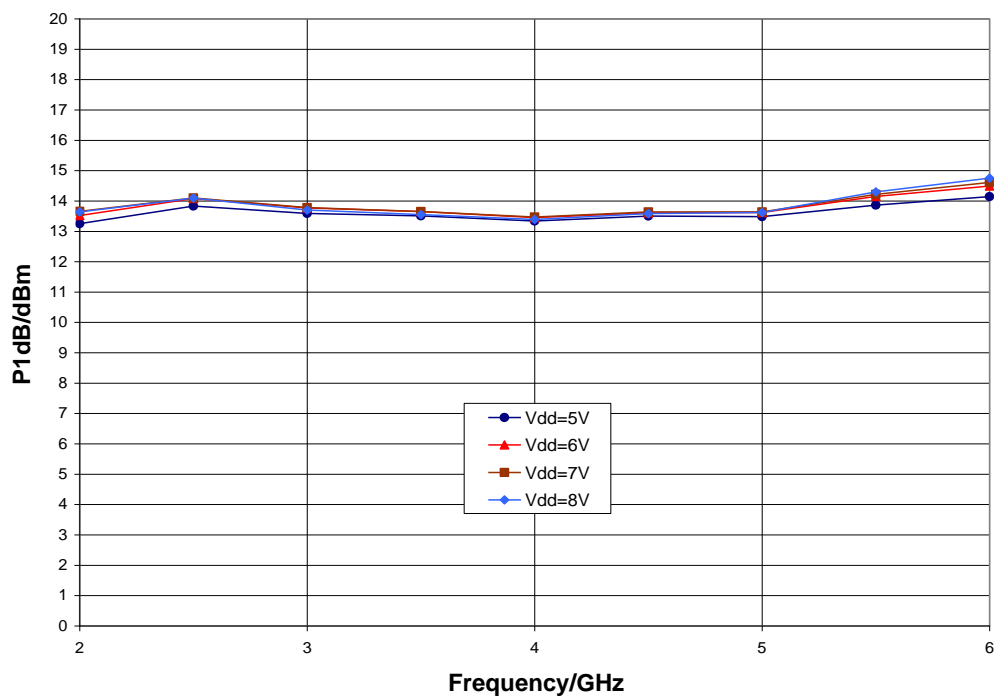


Typical Performance

Output IP3 vs. Temperature, $V_{dd} = 8.0 \text{ V}$

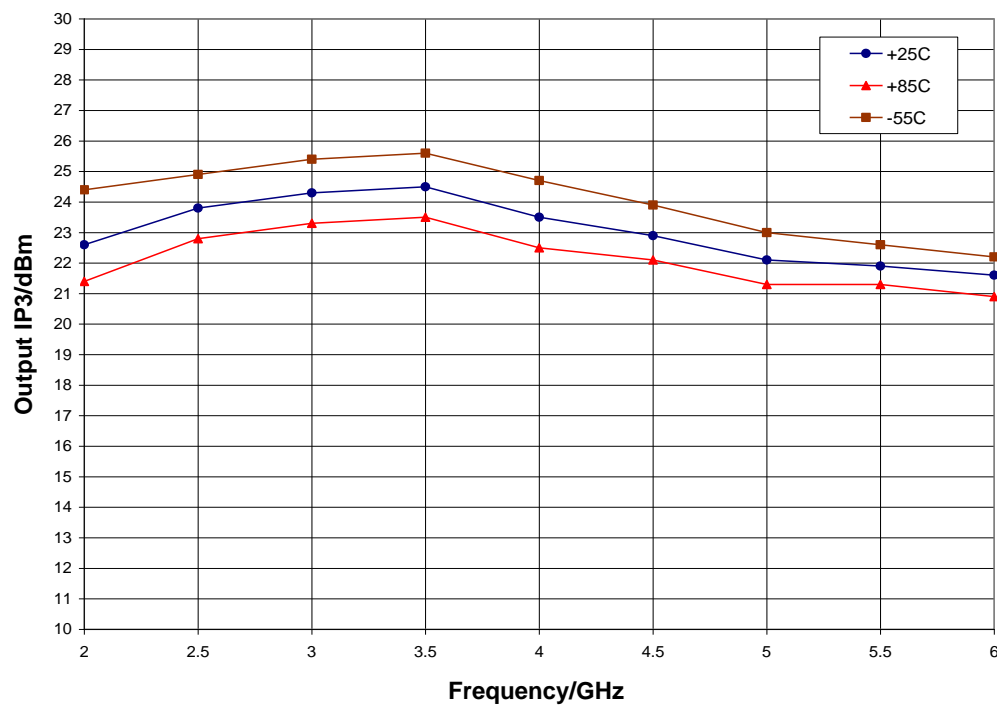


Output IP3 vs. Supply Voltage, $T_A = 25 \text{ }^{\circ}\text{C}$

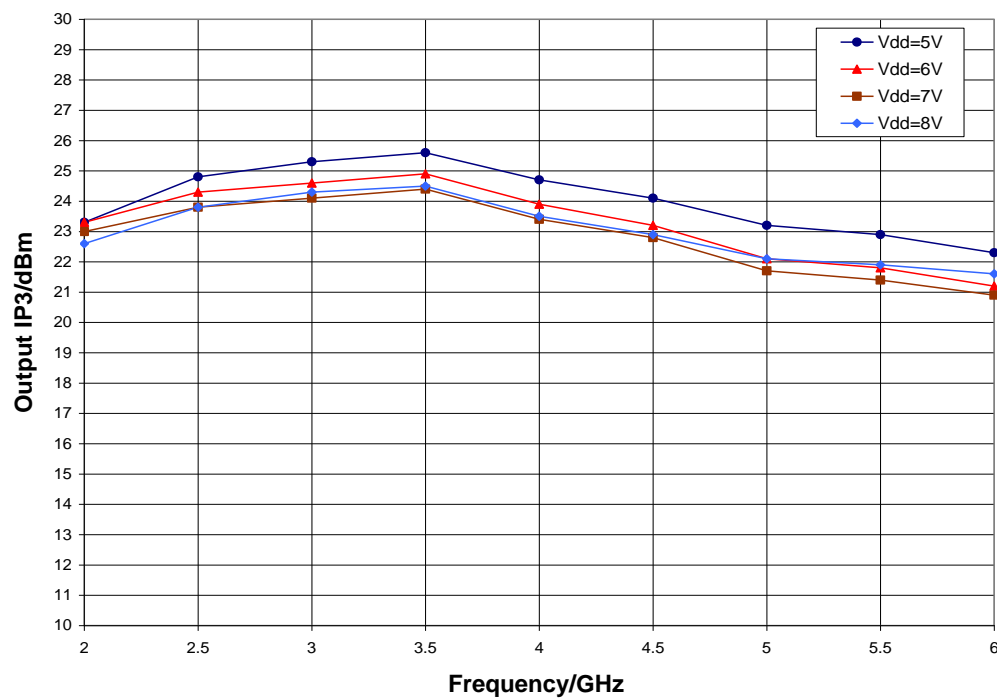


Typical Performance

Output Power, $V_{dd} = 8.0 \text{ V}$, $T_A = 25 \text{ }^{\circ}\text{C}$

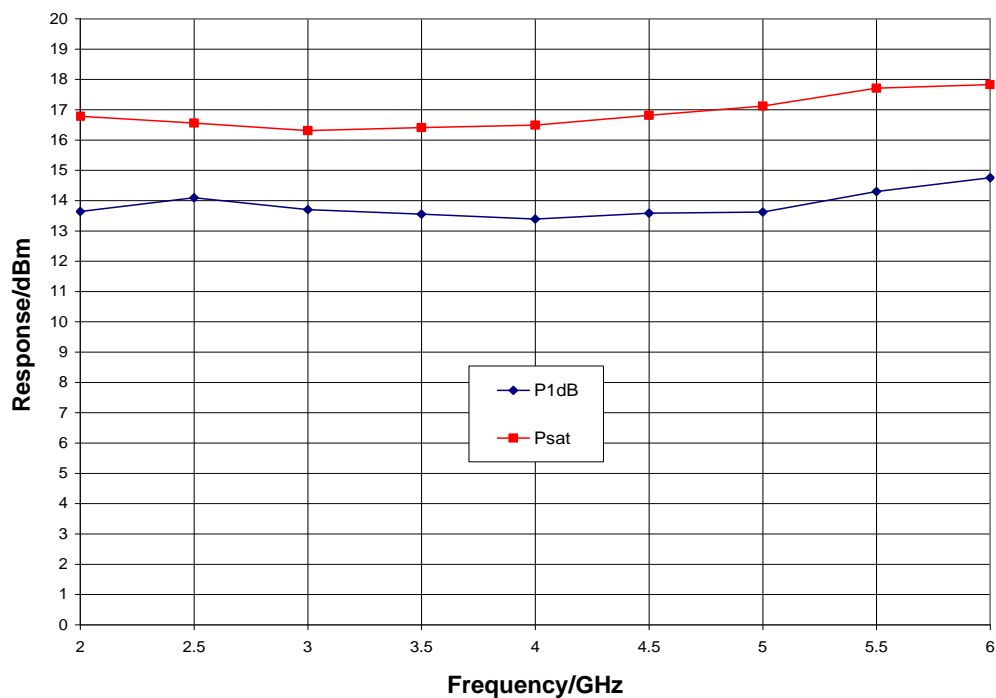

Mechanical Information

Package Information and Dimensions

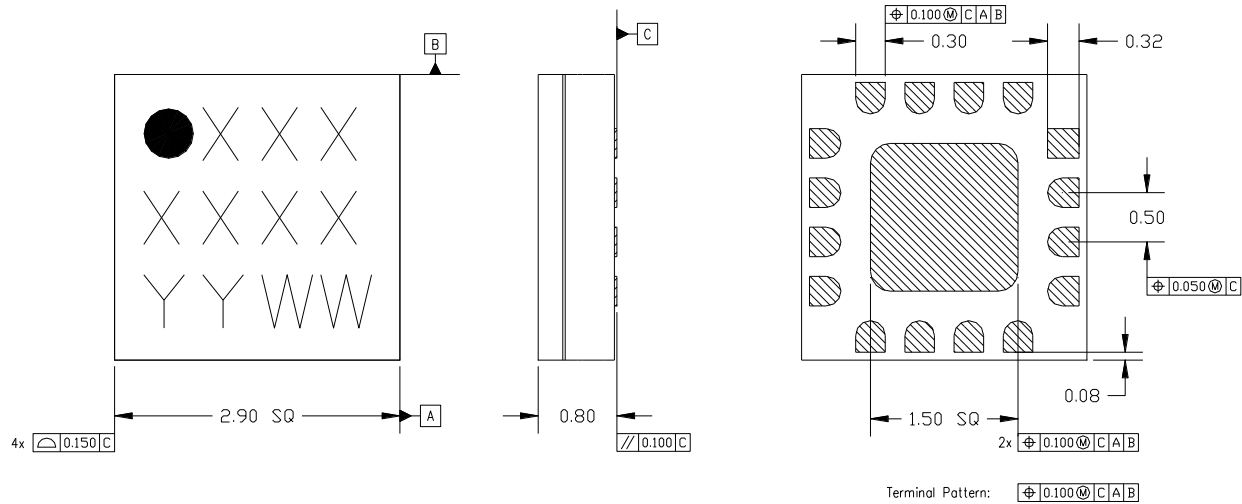

Notes:

- All dimensions shown in mm.
- Material: Black alumina
- Lead finish
 - Ni: 8.89um max, 1.27um min
 - Pd: 0.17um max, 0.07um min
 - Au: 0.254um max, 0.03um min
- Marking
 - Line 1: Part number
 - Example: CMD231C3 shall be marked as 231
 - Line 2: Lot number
 - Line 3: Date code - Last 2 digits of the year of manufacture followed by a 2 digit week code
- Alternate pin #1 identifier is a single square pad
- Alternate die paddle may have chamfered corners

Recommended PCB Land Pattern


Qorvo recommends that the user develop the land pattern that will provide the best design for proper solder reflow and device attach for their specific application. Please review Qorvo Application Note AN 105 for a recommended land pattern approach.

Recommended Solder Reflow Profile

Qorvo recommends screen printing with belt furnace reflow to ensure proper solder reflow and device attach. Please review Qorvo Application Note AN 102 for a recommended solder reflow profile.

Pin Description

Pin Diagram

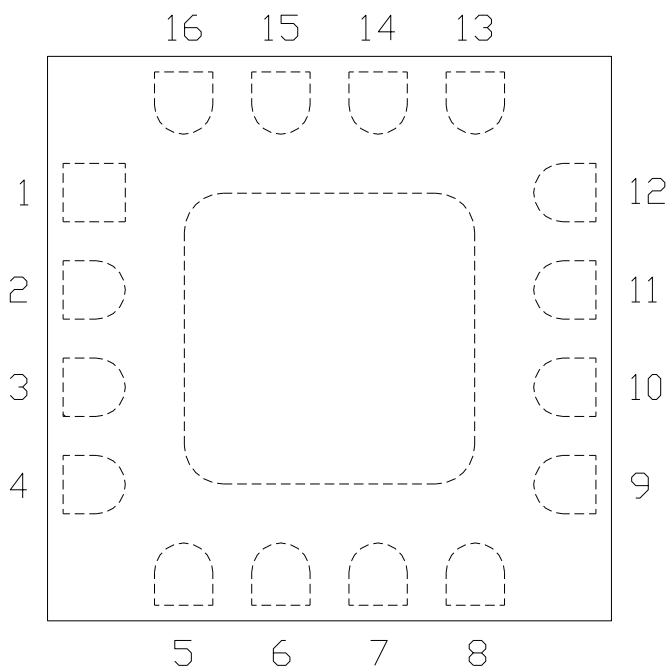


Functional Description

Pin	Function	Description	Schematic
1, 4 - 6, 8, 9, 12 - 16	N/C	No connection required These pins may be connected to RF / DC ground	
3	RF in	DC blocked and 50 ohm matched	
7	V _{dd}	Power supply voltage Decoupling and bypass caps required	
10	RF out	DC blocked and 50 ohm matched	
2, 11 and die paddle	Ground	Connect to RF / DC ground	

Applications Information

Application Circuit

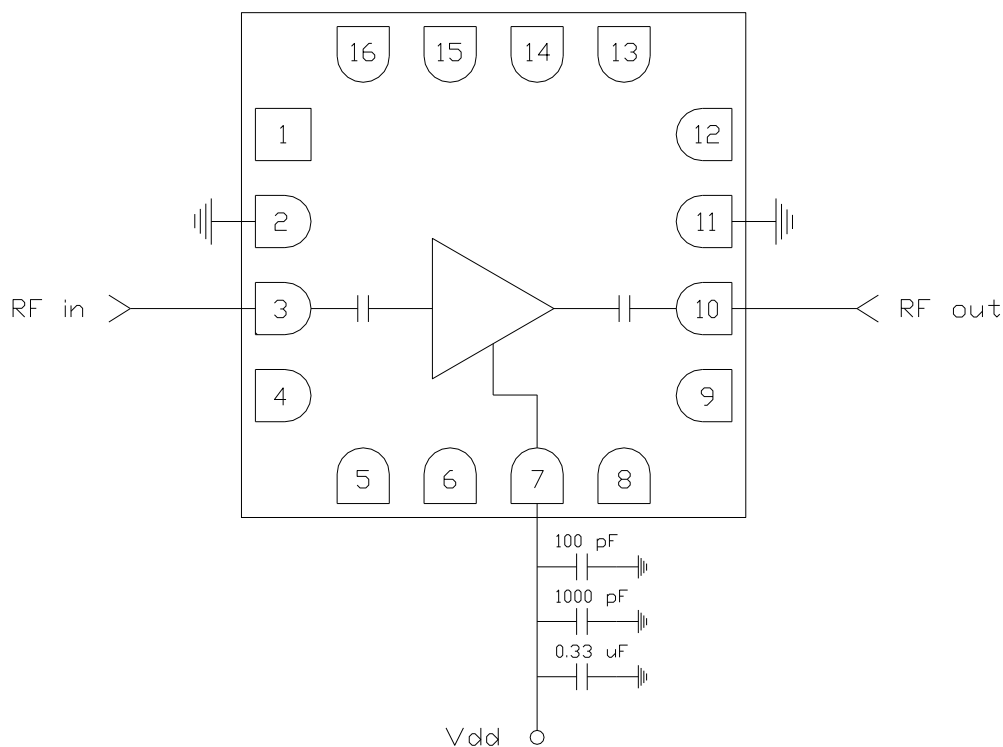

Biasing and Operation

The CMD231C3 is biased with a single positive drain supply. Performance is optimized when the drain voltage is set between +5.0 V and +8.0 V.

Turn ON procedure:

1. Apply drain voltage V_{dd} and set to +8 V

Turn OFF procedure:

1. Turn off drain voltage V_{dd}


RF power can be applied at any time.

GaAs MMIC devices are susceptible to damage from Electrostatic Discharge. Proper precautions should be observed during handling, assembly and test.

Applications Information

Evaluation Board

The circuit board shown has been developed for optimized assembly at Qorvo. A sufficient number of via holes should be used to connect the top and bottom ground planes. As surface mount processes vary, careful process development is recommended.

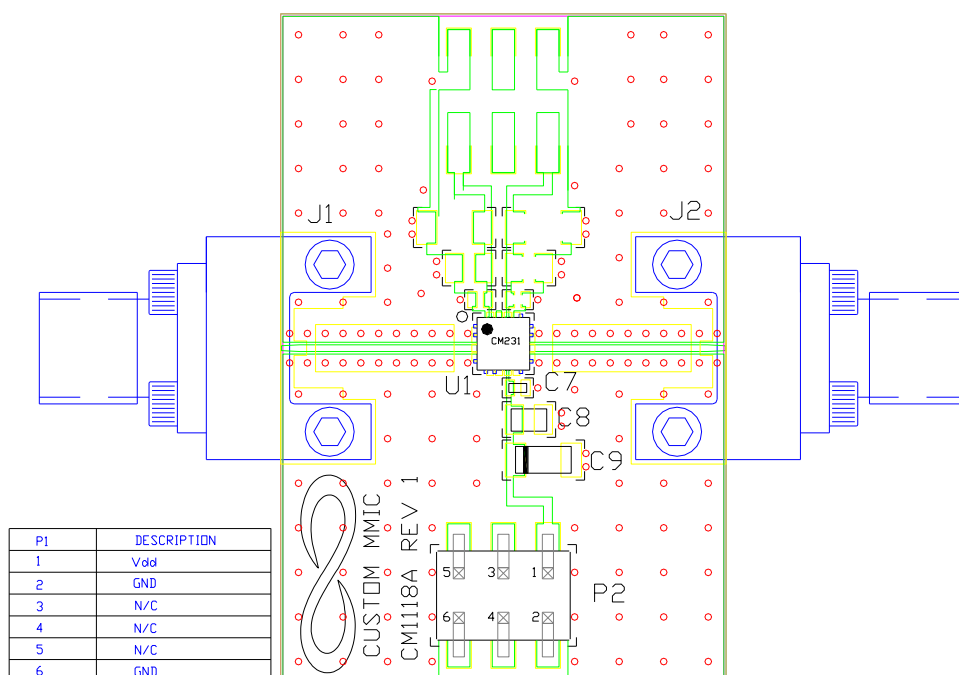

Bill of Material

Designator	Value	Description
J1, J2		SMA End Launch Connector
P2		6 Pin Header
C9	0.33 μ F	Capacitor, Tantalum
C8	1000 pF	Capacitor, 0603
C7	100 pF	Capacitor, 0402
U1		CMD231C3 Low Noise Amplifier
PCB		CM1118A Evaluation PCB

Handling Precautions

Parameter	Rating	Standard
ESD – Human Body Model (HBM)	Class 1A	ESDA / JEDEC JS-001-2012
MSL – Moisture Sensitivity Level	Level 1	JEDEC standard IPC/JEDEC J-STD-020



Caution!
ESD-Sensitive Device

RoHS Compliance

This part is compliant with 2011/65/EU RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment) as amended by Directive 2015/863/EU.

This product also has the following attributes:

- Lead Free
- Antimony Free
- TBBP-A (C₁₅H₁₂Br₄O₂) Free
- SVHC Free
- Halogen Free
- PFOS Free

Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations:

Web: www.qorvo.com

Tel: 1-844-890-8163

Email: customer.support@qorvo.com

Important Notice

The information contained in this Data Sheet and any associated documents (“Data Sheet Information”) is believed to be reliable; however, Qorvo makes no warranties regarding the Data Sheet Information and assumes no responsibility or liability whatsoever for the use of said information. All Data Sheet Information is subject to change without notice. Customers should obtain and verify the latest relevant Data Sheet Information before placing orders for Qorvo® products. Data Sheet Information or the use thereof does not grant, explicitly, implicitly or otherwise any rights or licenses to any third party with respect to patents or any other intellectual property whether with regard to such Data Sheet Information itself or anything described by such information.

DATA SHEET INFORMATION DOES NOT CONSTITUTE A WARRANTY WITH RESPECT TO THE PRODUCTS DESCRIBED HEREIN, AND QORVO HEREBY DISCLAIMS ANY AND ALL WARRANTIES WITH RESPECT TO SUCH PRODUCTS WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Without limiting the generality of the foregoing, Qorvo® products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death. Applications described in the Data Sheet Information are for illustrative purposes only. Customers are responsible for validating that a particular product described in the Data Sheet Information is suitable for use in a particular application.

© 2022 Qorvo US, Inc. All rights reserved. This document is subject to copyright laws in various jurisdictions worldwide and may not be reproduced or distributed, in whole or in part, without the express written consent of Qorvo US, Inc. | QORVO® is a registered trademark of Qorvo US, Inc.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Qorvo:](#)

[CMD231C3](#)