
QPQ1028 Dual-Use GPS L1/L2 Dual Filter

Product Overview

QPQ1028 is a L1/L2 GPS dual filter in a compact size for use in any GPS application. Designed for rejection of spurious signals, this SAW dual filter also has excellent power handling capability for low power transmitters.


Housed in a 5.0 x 5.0 mm laminate with overmold package, this device allows for a compact and cost-effective dual filter solution for GPS applications.

No matching components are required, making the PCB design and implementation easy.



2 Pin 5 x 5 mm Leadless SMT Package

Functional Block Diagram



Key Features

- Usable Bandwidth 24 MHz
- Low Insertion Loss: <3.5 dB
- High Out of Band Attenuation
- Small Size 5x5 mm Plastic Overmold package

Performance is typical across frequency. Please reference electrical specification table and data plots for more details.

Applications

• Dual Band GPS Receivers

Ordering Information

Part No.	Description
QPQ1028SR	100 Piece 7" Short Reel
QPQ1028TR7	1000 Piece 7" Reel
QPQ1028EVB	Evaluation Board

Pin Configuration

Pin No.	Label
1	RF Input ⁽¹⁾
2	RF Output ⁽¹⁾
3	Ground

⁽¹⁾ Blocking capacitors are required on any ports where a DC voltage may be present.

QOULO

QPQ1028 Dual-Use GPS L1/L2 Dual Filter

Absolute Maximum Ratings

Parameter	Rating
Storage Temperature	-40 to 105°C
Operation Temperature	-40 to 75°C
RF Input Power - Test conditions: Passband CW, 500 msec max pulse	34 dBm
duration, @ +25 °C	

Exceeding any one or a combination of the Absolute Maximum Rating conditions may cause permanent damage to the device. Extended application of Absolute Maximum Rating conditions to the device may reduce device reliability.

Minimum Lifetime Ratings

Conditions	Rating			
RF Input Power ⁽¹⁾ , Pin 1	>10 years			
⁽¹⁾ Input Power: Passband CW, 25 dBm, @ +75 °C				

Electrical Specifications ^(1,2) - Module

Test conditions unless otherwise noted: Temperature Range = -40 °C to +75 °C, 50 Ω system

Parameter ⁽³⁾	Conditions	Min	Тур. ⁽⁴⁾	Max	Units
Operational Frequency L2		1215.60	1228.69	1239.60	MHz
Operational Frequency L1		1563.42	1576.46	1587.42	MHz
Attenuation 5 MHz to 1077.6 MHz	Ref 0 dB	34.0	37.3	-	dB
Attenuation 1377.6 MHz to 1425.42 MHz	Ref 0 dB	34.0	37.7	-	dB
Attenuation 1725.42 MHz to 2500 MHz	Ref 0 dB	34.0	38.3	-	dB
Attenuation 2.5 GHz to 11 GHz	Ref 0 dB	4.0	6.5	-	dB
Attenuation 11 GHz to 40 GHz	Ref 0 dB	4.0	6.0	-	dB
Operating Temperature		-40	+25	+75	°C

Notes:

1. All specifications are based on the Qorvo schematics for the reference designs shown on page 4.

2. In production, devices will be tested at room temperature to a guard banded specification to ensure electrical compliance over temperature.

3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacture tolerances.

4. Typical values are based on average measurements at room temperature on pcb. (25 °C ±5 °C)

QPQ1028 Dual-Use GPS L1/L2 Dual Filter

Electrical Specifications ^(1,2) – L2 Performance

Test conditions unless otherwise noted: Temperature Range = -40 °C to +75 °C, 50 Ω system

Parameter ⁽³⁾	Conditions	Min	Тур. (4)	Max	Units
Operational Frequency L2		1215.600	1228.690	1239.600	MHz
Lower 3.0 dB Passband Edge	Ref Loss @ 1227.6 MHz	-	1204.024	1212.600	MHz
Upper 3.0 dB Passband Edge	Ref Loss @ 1227.6 MHz	1242.600	1253.130	-	MHz
Lower 3.5 dB Passband Edge	Ref 0 dB	-	1208.761	1215.600	MHz
Upper 3.5 dB Passband Edge	Ref 0 dB	1239.600	1248.620	-	MHz
Insertion Loss	Ref 0 dB, 1215.6MHz to 1239.6 MHz	-	2.6	3.5	dB
Input Return Loss	1215.6MHz to 1239.6 MHz	10.0	11.7	-	dB
Output Return Loss	1215.6MHz to 1239.6 MHz	10.0	12.3	-	dB
Amplitude Variation	1215.6 MHz to 1239.6 MHz (p-p)	-	0.74	1.25	dB
Phase Linearity	1215.6 MHz to 1239.6 MHz (p-p)	-	6.9	13.0	Deg

Electrical Specifications ^(1,2) – L1 Performance

Test conditions unless otherwise noted: Temperature Range = -40 °C to +75 °C, 50 Ω system


Parameter ⁽³⁾	Conditions	Min	Тур. (4)	Max	Units
Operational Frequency L1		1563.420	1576.460	1587.420	MHz
Lower 3.0 dB Passband Edge	Ref Loss @ 1575.42 MHz	-	1550.501	1560.420	MHz
Upper 3.0 dB Passband Edge	Ref Loss @ 1575.42 MHz	1590.420	1604.890	-	MHz
Lower 3.5 dB Passband Edge	Ref 0 dB	-	1556.354	1563.420	MHz
Upper 3.5 dB Passband Edge	Ref 0 dB	1587.420	1596.557	-	MHz
Insertion Loss	Ref 0 dB, 1563.42 MHz to 1587.42 MHz	-	3.0	3.5	dB
Input Return Loss	1563.42 MHz to 1587.42 MHz	10.0	12.6	-	dB
Output Return Loss	1563.42 MHz to 1587.42 MHz	10.0	13.3	-	dB
Amplitude Variation	1563.42 MHz to 1587.42 MHz (p-p)	-	0.60	1.25	dB
Phase Linearity	1563.42 MHz to 1587.42 MHz (p-p)	-	6.8	12.0	Deg


Notes:

- 1. All specifications are based on the Qorvo schematics for the reference designs shown on page 4.
- 2. In production, devices will be tested at room temperature to a guard banded specification to ensure electrical compliance over temperature.
- 3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacture tolerances.
- 4. Typical values are based on average measurements at room temperature on pcb. (25 °C ±5 °C)



QPQ1028PCB Evaluation Board

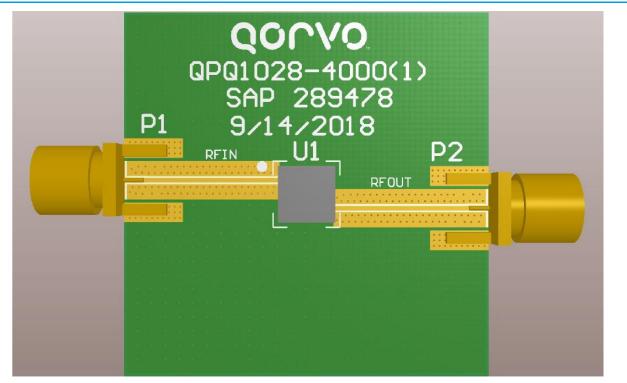



Notes: Blocking capacitors are required on any RF ports where a DC voltage may be present.

Bill of Material – QPQ1028-EVB

Reference Des.	Value	Description	Manuf.	Part Number
U1	-	Dual-Use GPS L1/L2 Dual Filter	Qorvo	QPQ1028
P1, P2, P3	-	SMA Edge connector	Various	
PCB	-	Printed Circuit Board	Various	

0

-5

-10

-15

-20 -


1,540


1,560

æ

L1 Typical Performance Plots

Test conditions unless otherwise noted: Temps = -40 °C, +25 °C, +75 °C, 50 Ω system

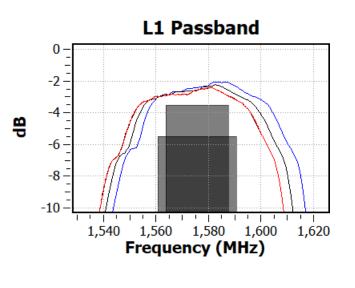

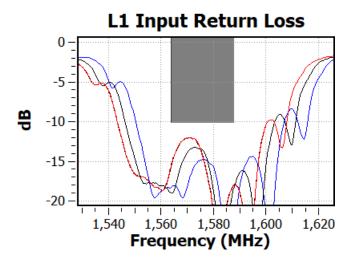

L1 Output Return Loss


1,580

Frequency (MHz)

1,600


1,620





L2 Typical Performance Plots


Test conditions unless otherwise noted: Temps = -40 °C, +25 °C, +75 °C, 50 Ω system

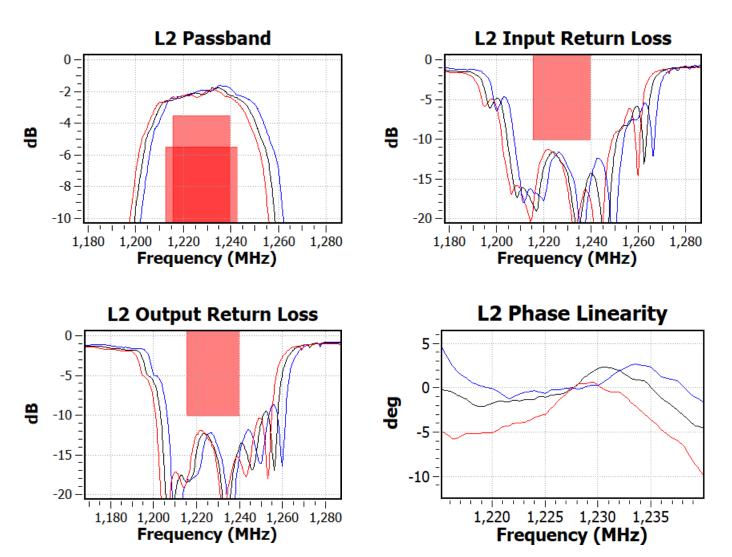




L1-L2 Typical Performance Plots

Test conditions unless otherwise noted: Temps = -40 °C, +25 °C, +75 °C, 50 Ω system

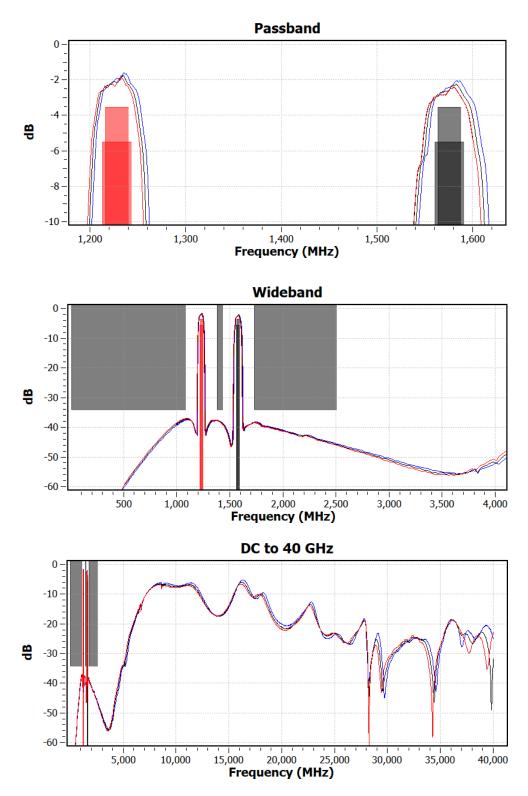



Package Marking and Dimensions

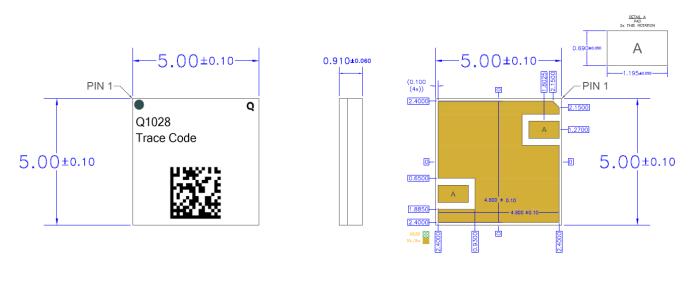


TOP	SIDE	BOTTOM
VIEW	VIEW	VIEW

NOTES: UNLESS OTHERWISE SPECIFIED:

- 1. PACKAGE LEADS ARE GOLD PLATING
- 2. PART IS PLASTIC OVERMOLD
- 3. <u>PART MARKING:</u> QORVO Logo PART NUMBER: 1028 TRACE CODE: Assigned by subcontractor
- 4. ALL DIMENSIONS ARE IN MILLIMETERS. ANGLEA ARE IN DEGREES
- 5. DIMENSIONS AND TOLERANCE FORMATS CONFORM TO SPE-000677.



PCB Mounting Pattern

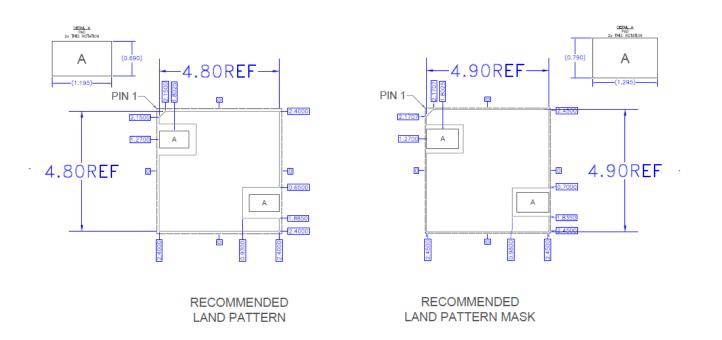

Notes:


- 1. All dimensions are in millimeters.
- 2. This drawing specifies the mounting pattern used on the Qorvo evaluation board for this product. Some modification may be necessary to suit end user assembly materials and processes.

QPQ1028 Dual-Use GPS L1/L2 Dual Filter

Assembly Notes

Compatible with both lead-free (260°C peak reflow temp.) and tin/lead (245°C peak reflow temp.) soldering processes. Contact Plating: ENEPIG.

Recommended Soldering Temperature Profile

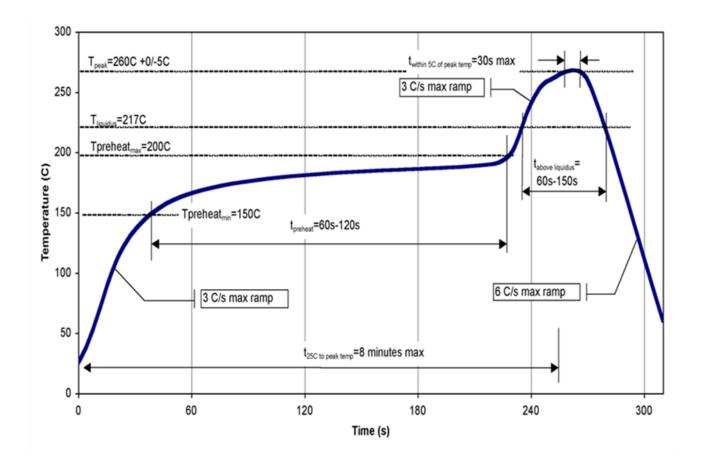



Handling Precautions

Parameter	Rating	Standard	
ESD-Human Body Model (HBM)	Class 3B	ESDA/JEDEC JS-001-2012	Caution!
ESD-Charged Device Model (CDM)	Class C3	ESDA / JEDEC JS-002-2014	ESD-Sensitive Device
MSL-Moisture Sensitivity Level	Level 3	IPC/JEDEC J-STD-020	

RoHS Compliance

This part is compliant with 2011/65/EU RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment) as amended by Directive 2015/863/EU.

This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A (C₁₅H₁₂Br₄0₂) Free
- PFOS Free

Contact Information

For the latest specifications, additional product information, worldwide sales, and distribution locations:

Web: www.qorvo.com

Tel: 1-844-890-8163

Email: customer.support@qorvo.com

Important Notice

The information contained herein is believed to be reliable; however, Qorvo makes no warranties regarding the information contained herein and assumes no responsibility or liability whatsoever for the use of the information contained herein. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for Qorvo products. The information contained herein, or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether regarding such information itself or anything described by such information. THIS INFORMATION DOES NOT CONSTITUTE A WARRANTY WITH RESPECT TO THE PRODUCTS DESCRIBED HEREIN, AND QORVO HEREBY DISCLAIMS ANY AND ALL WARRANTIES WITH RESPECT TO SUCH PRODUCTS WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

Without limiting the generality of the foregoing, Qorvo products are not warranted or authorized for use as critical components in medical, lifesaving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Copyright 2021 © Qorvo, Inc. | Qorvo is a registered trademark of Qorvo, Inc.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Qorvo:

QPQ1028SR QPQ1028TR7 QPQ1028EVB