

# QPQ1290 Band 41 Tx / Rx Filter

#### **Product Overview**

The QPQ1290 is a high-performance Bulk Acoustic Wave (BAW) Tx/Rx filter designed to meet the strict LTE rejection requirements for use in B41.


QPQ1290 is specifically designed to meet the highperformance expectations of insertion loss and rejection for LTE transmit systems under all operating conditions.

The QPQ1290 uses common module packaging techniques to achieve the industry standard 1.8 x 1.4 x 0.73 mm footprint.



8-Pad 1.8 mm x 1.4 mm x 0.73 mm Package

# **Functional Block Diagram**

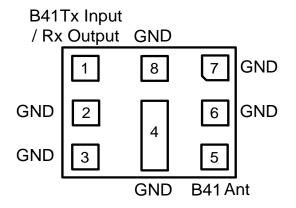

Top View

## **Key Features**

- Highly Selective BAW Filter Achieving Low Insertion Loss Over Full Bandwidth and Operating Conditions
- Excellent Wi-Fi Rejection
- Performance -20 to +85 °C
- RoHS compliant (2002/95/EC), Pb-free



# **Applications**

• Full Band 41 TD-LTE Tx / Rx

# **Pin Configuration - Single Ended**

Pin No.	Label - Function		
1	B41 Tx Input / Rx Output		
5	B41 Ant - Antenna Port		
2, 3, 4, 6, 7, 8	GND - Ground Connection*		

\*Note: see application section for details on optimal grounding

# **Ordering Information**

Part No.	Description	
QPQ1290TR7	7" Taped Reel with 2500 pieces	
QPQ1290-EVB	Assembled Evaluation Board	



# **Absolute Maximum Ratings**

Parameter	Rating
Operating Temperature	−20 to +85 °C
Storage Temperature	−40 to +85°C
Input Power (In Pass-band, CW signal, pin1)	+29 dBm

Operation of this device outside the parameter ranges given above may cause permanent damage.

# **Recommended Operating Conditions**

Parameter	Min	Тур	Max	Unit
T <sub>CASE</sub>	-20		+85	°C

Electrical specifications are measured at specified test conditions.

## Electrical Specifications - Band 41 (1)

Test conditions unless otherwise specified. Temperature Range: −20°C to +85 °C


Parameter	Conditions	Min	Тур	Max	Unit
Insertion Loss	2496 – 2500 MHz	-	3.1	3.9	dB
	2500 – 2686 MHz	-	2.7	3.3	dB
	2686 – 2690 MHz	-	2.2	3.1	dB
Passband Ripple <sup>(3)</sup>	2496 – 2690 MHz	-	1.1	2.2	dB
	2496 – 2690 MHz	-	1.7	-	-
VSWR In	2500-2550 MHz	-	1.7	2.1	-
	2590-2690 MHz	-	1.6	2.1	-
Return Loss <sup>(4)</sup>	2515-2520 MHz	-	14	-	dB
VSWR Out	2496 – 2690 MHz	-	1.7	-	-
	2500-2550 MHz	-	1.5	2.3	-
	2590-2690 MHz	-	1.7	2.3	-
	10 - 1564 MHz	35	50	-	dB
	1565 - 1615 MHz	36	46	-	dB
	1616-2400 MHz	5	6	-	dB
	WiFi CH1-7 <sup>(5)</sup>	40	44	-	dB
	WiFi CH8-10 <sup>(5)</sup>	42	51	-	dB
A44	WiFi CH11 <sup>(5)</sup>	38	47	-	dB
Attenuation	WiFi CH12 <sup>(5)</sup>	21	41	-	dB
	WiFi CH13 <sup>(5)</sup>	10	24	-	dB
	2775-4991 <sup>(6)</sup> MHz	12	15	-	dB
	4992 - 5380 MHz	27	32	-	dB
	5381 - 7487 MHz	21	23	-	dB
	7488 – 8000 MHz	16	22	-	dB


#### Notes:

- 1. All specifications are based on the Qorvo schematic for the main reference design shown on page 3
- 2. Typical values are values of a nominal part at +25 °C.
- Measured as Amplitude Variation.
- 4. Return Loss (2515-2520) MHz to catch 180° rotated parts.
- 5. Averaging |S21| over the center 19 MHz of the channels and converting to dB value.
- 6. Measured as Attenuation rejection 2775-3000 MHz.



## **Evaluation Board and Schematic - QPQ1290EVB**

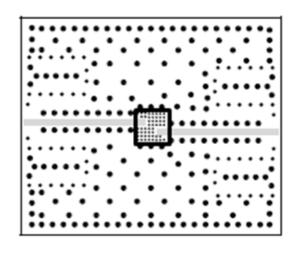

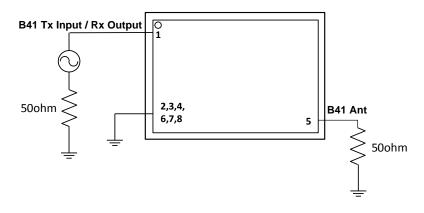

#### Notes:

- Top, middle & bottom layers: 35 μm Cu finished thickness plated up to 25 μm Substrates: Isola FR-408HR Finish plating: Silver Hole plating: Via fill
- 2. Grey indicates metalized area
- 3. This footprint represents a recommendation only
- 4. For solder pad recommendation see mechanical information
- 5. Pin 1 is in the same corner as the ID dot (see page 5 Marking).


## Bill of Material - QPQ1290EVB


Ref. Des.	Description	Manufacturer	Part Number
	Filter, Band 41	Qorvo	QPQ1290
PCB	Printed Circuit Board, 3-Layer	various	QPQ1290_EVB_R03B





#### **Performance Plots - Band 41**


Test conditions unless otherwise noted: Temperature +25°C

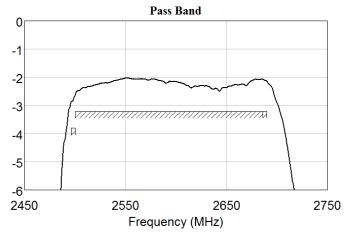


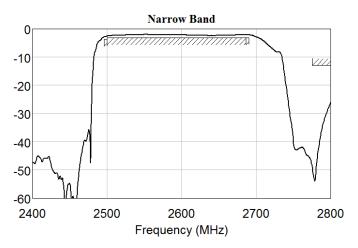

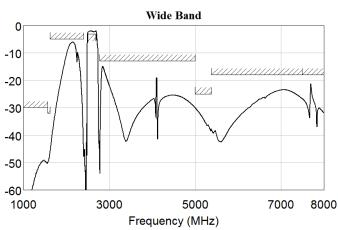

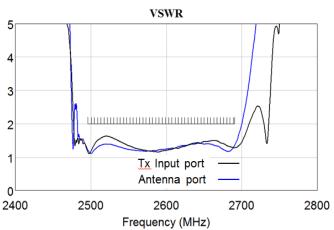

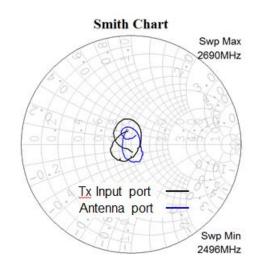

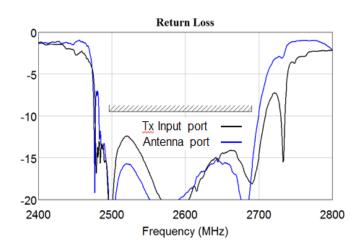




## **Package Marking and Dimensions**

#### Package Marking

Product Identifier: 290 Assembly Code: XXX

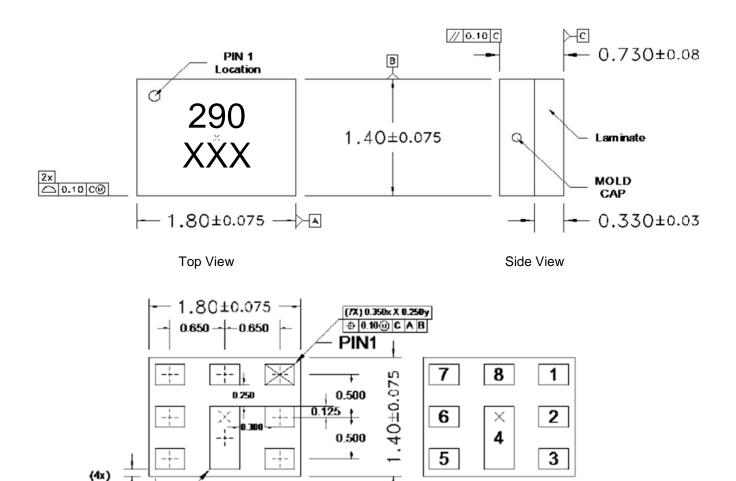

#### Notes:

- 1. Package Style: Laminate Over Mold Module
- 2. Dimensions: 1.8 x 1.4 x 0.73 mm

0.075±0.075 (1X) 0.350x X 0.750y (10) 0.10% (C | A | B


3. All dimensions shown are nominal in millimeters

**Bottom View** 

**Bottom Pin View** 



# **PCB Mounting Pattern**

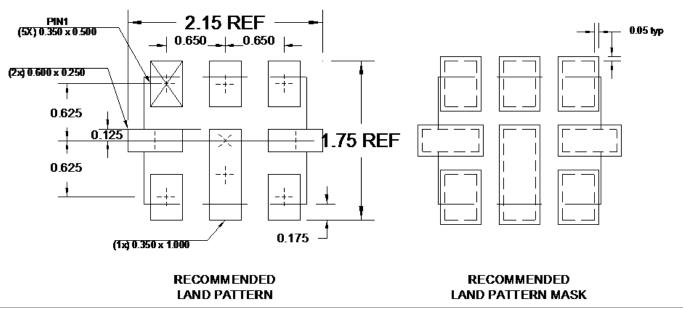


#### Notes:

- 1. All dimensions are in millimeters. Angles are in degrees.
- 2. Use 1 oz. copper minimum for top and bottom layer metal.



# **Tape and Reel Information – Carrier and Cover Tape Dimensions**

Tape and reel specifications for this part are also available on the Qorvo website. Standard T/R size = 2500 pieces on a 7" reel. All dimensions are in millimeters.

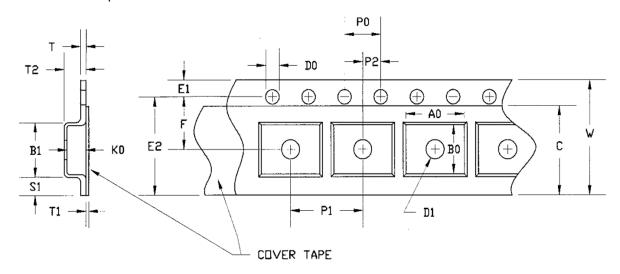

USER DIRECTION OF FEED -

Feature	Measure	Symbol	Size (mm)
Cavity	Length	A0	1.60
	Width	В0	2.00
	Depth	K0	0.95
	Pitch	P1	4.0
Centerline	Cavity to Perforation - Length Direction	P2	2.00
Distance	Cavity to Perforation - Width Direction	F	3.50
Carrier Tape	Width	W	8.0
Cover Tape	Width	С	5.4



#### **Handling Precautions**

Parameter	Rating	Standard
ESD-Human Body Model (HBM)	Class 2	ESDA / JEDEC JS-001-2012
ESD - Charged Device Model (CDM)	Class C3	JEDEC JESD22-C101F
MSL – Moisture Sensitivity Level	Level 3	IPC/JEDEC J-STD-020



Caution! ESD-Sensitive Device

#### **Solderability**

Compatible with both lead-free (260°C max. reflow temp.) and tin/lead (245°C max. reflow temp.) soldering processes. Solder profiles available upon request.

Contact Plating: Electrolytic Ni/Au

## **RoHS Compliance**

This part is compliant with EU 2002/95/EC RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment).

This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A (C<sub>15</sub>H<sub>12</sub>Br<sub>4</sub>O<sub>2</sub>) Free
- PFOS Free
- SVHC Free



#### **Contact Information**

For the latest specifications, additional product information, worldwide sales and distribution locations:

Web: <u>www.qorvo.com</u> Tel: 1-844-890-8163

Email: <a href="mailto:customer.support@gorvo.com">customer.support@gorvo.com</a>

For technical questions and application information:

Email: appsupport@qorvo.com

## **Important Notice**

The information contained herein is believed to be reliable; however, Qorvo makes no warranties regarding the information contained herein and assumes no responsibility or liability whatsoever for the use of the information contained herein. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for Qorvo products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. THIS INFORMATION DOES NOT CONSTITUTE A WARRANTY WITH RESPECT TO THE PRODUCTS DESCRIBED HEREIN, AND QORVO HEREBY DISCLAIMS ANY AND ALL WARRANTIES WITH RESPECT TO SUCH PRODUCTS WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

Without limiting the generality of the foregoing, Qorvo products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Copyright 2018 © Qorvo, Inc. | Qorvo is a registered trademark of Qorvo, Inc.

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Qorvo:

QPQ1290TR7