



TGL2210-SM

0.05–6 GHz 100 Watt VPIN Limiter


Product Overview

The Qorvo TGL2210-SM is a high-power receive protection circuit (limiter) operating from 0.05-6GHz. Capable of withstanding up to 100 W incident power levels, the TGL2210-SM allows < 17 dBm flat leakage to pass through and contributes < 0.7 dB in insertion loss.

Using Qorvo's passive GaAs VPIN technology, the TGL2210-SM does not require bias and is offered in a small 4 x 4 (mm) plastic overmold package. This simplifies system integration while maximizing performance and protection.

The TGL2210-SM is ideal for commercial and military radar applications, communications systems and electronic warfare where protecting sensitive receive components from damage is critical.

Lead-free and RoHS compliant.

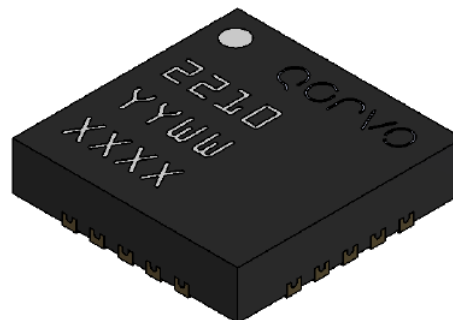


QFN 4x4 mm 20L

Key Features

- Frequency Range: 0.05 to 6.0 GHz
- Insertion Loss: < 0.7 dB
- Peak Power Handling: 100 W (pulsed)
- Flat Leakage: < 17 dBm
- Passive (no DC bias required)
- Recovery time < 40 ns
- QFN Package Dimensions: 4.0 x 4.0 x 0.85 mm

Functional Block Diagram

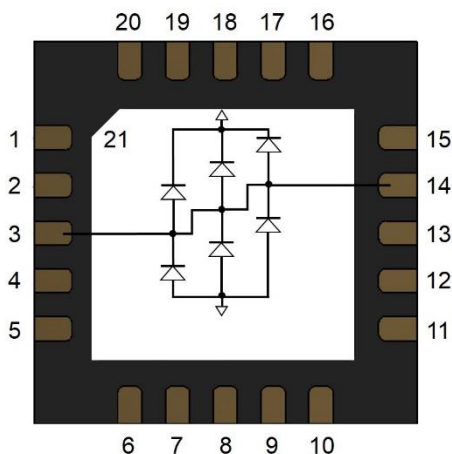

Top View

Applications

- Receive Chain Protection
- Commercial and Military Radar
- Communications
- Electronic Warfare

Ordering Information

Part	Description
TGL2210-SM	0.05–6.0 GHz 100W VPIN Limiter
TGL2210-SMEVB-01	Evaluation Board

Absolute Maximum Ratings

Parameter	Rating
Incident Power, Pulsed (PW = 10μs, DC = 10%), 50 Ω, 85 °C	110 W
Incident Power, CW, 50 Ω, 25 °C	85 W
Incident Power, CW, 50 Ω, 85 °C	70 W
Mounting Temperature (30 s max)	260 °C
Storage Temperature	-55 to 150 °C

Exceeding any one or a combination of the Absolute Maximum Rating conditions may cause permanent damage to the device. Extended application of Absolute Maximum Rating conditions to the device may reduce device reliability.

Recommended Operating Conditions

Parameter	Min	Typ	Max	Units
Operating Temperature Range	-40	+25	+85	°C
Passive – No Bias				

Electrical specifications are measured at specified test conditions. Specifications are not guaranteed over all recommended operating conditions.

Electrical Specifications

Parameter	Conditions	Min	Typical	Max	Units
Operational Frequency Range		0.05		6.0	GHz
Insertion Loss, Un-Tuned	Freq = 3.5 GHz		0.6	0.85	dB
Insertion Loss, Tuned	Freq = 3.5 GHz ⁽¹⁾		0.4		dB
Input Return Loss, Un-Tuned		10	11		dB
Output Return Loss, Un-Tuned		10	11.5		dB
Flat Leakage Power	@ P _{IN} > 30 dBm		< 17		dBm
Pulse Recovery Time			< 40		ns
Spike Leakage			< 0.5		dB
Insertion Loss Temperature Coefficient			0.001		dB/ °C

Notes: Test conditions unless otherwise noted: Temp = +25 °C, 50 Ω system.

1. Tuned EVB to improve 2-5 GHz

Thermal and Reliability Information







Parameter	Test Conditions	Value	Units
Incident Power	4.5 GHz, CW, 50 Ω, 25 °C	31	W
(168 hours RF Operational Life Test ⁽¹⁾)	4.5 GHz, Pulsed, PW=10 μs, DC=10%, 50 Ω, 25 °C	100	W

Notes:

1. Test was terminated at 168 hours. Insertion Loss remained ≤ 1 dB for device under test.




Performance Plots – Small Signal

Test conditions unless otherwise noted: Temp.=+25 °C

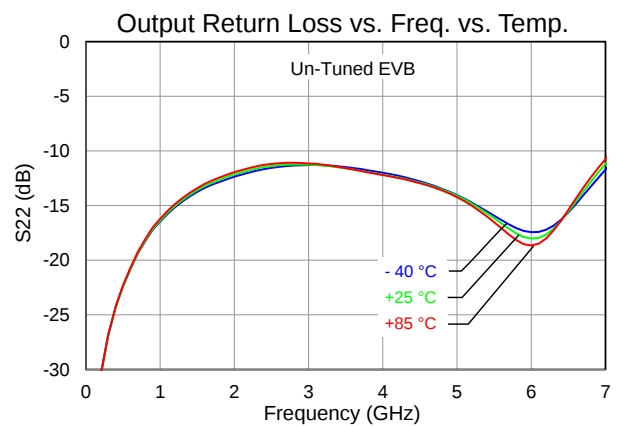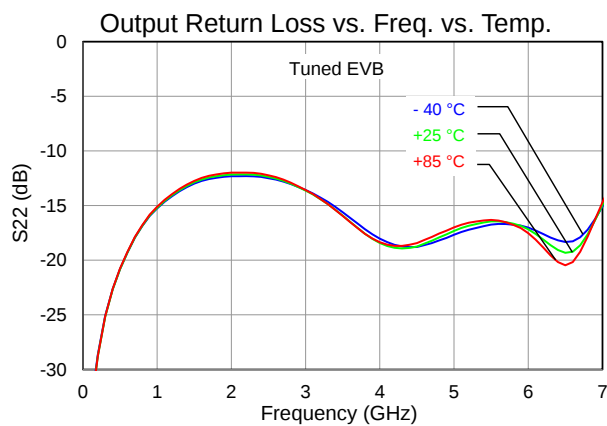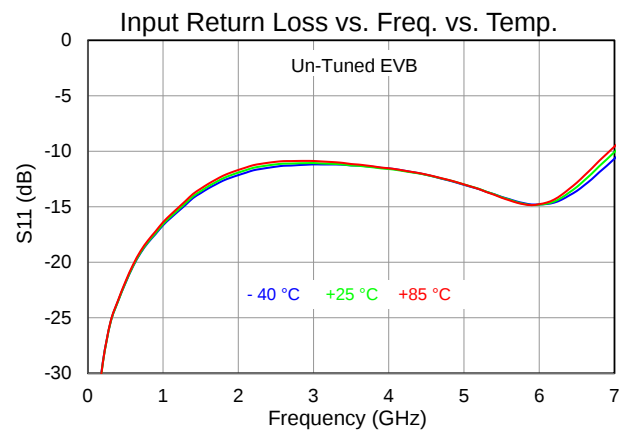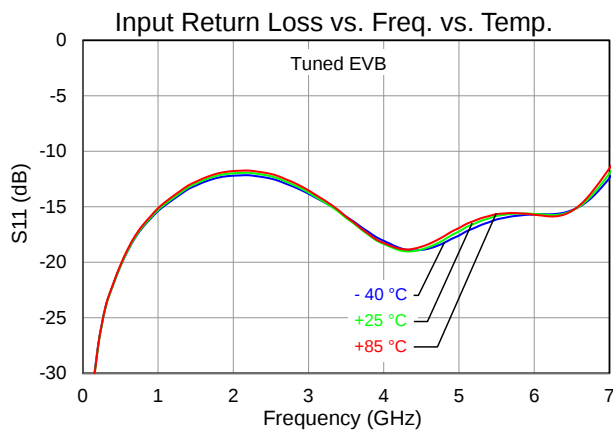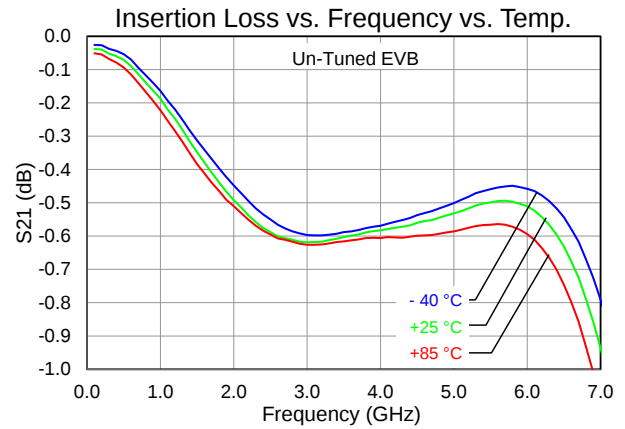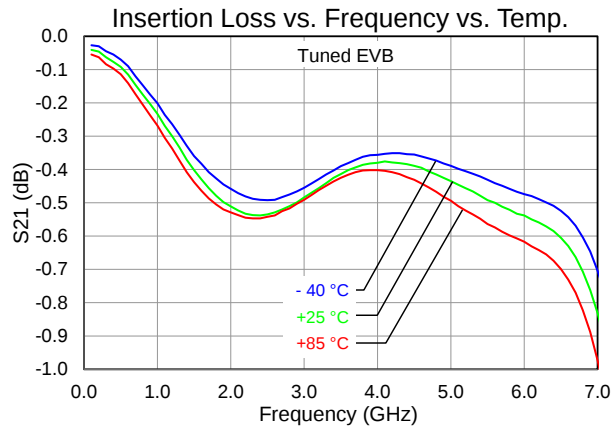






Performance Plots – Small Signal

Test conditions unless otherwise noted: Temp.=+25 °C

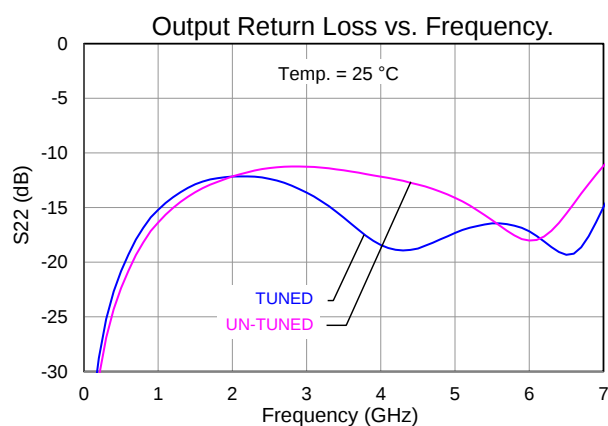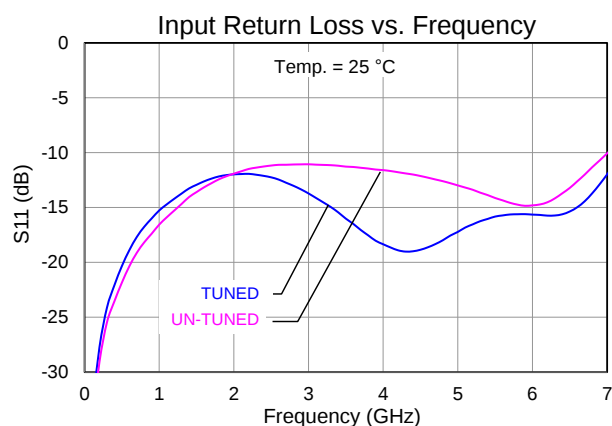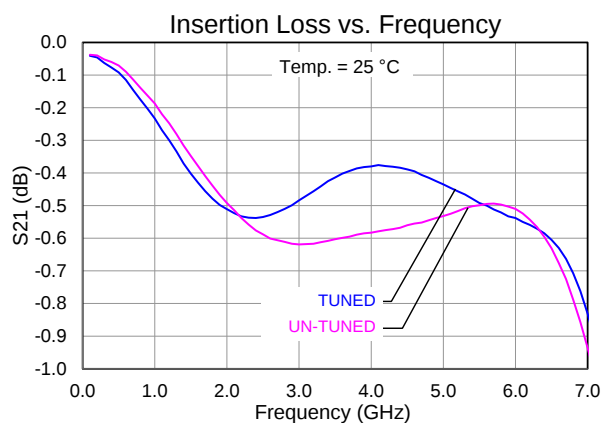




Performance Plots – Large Signal

Test conditions unless otherwise noted: Temp.=+25 °C

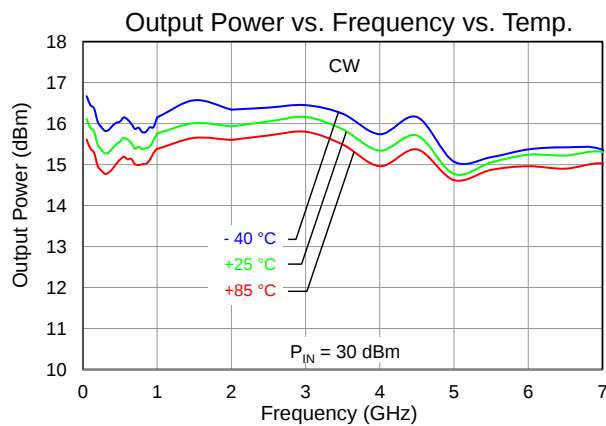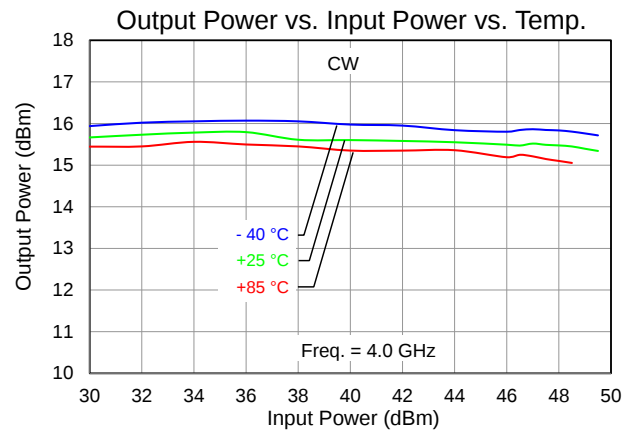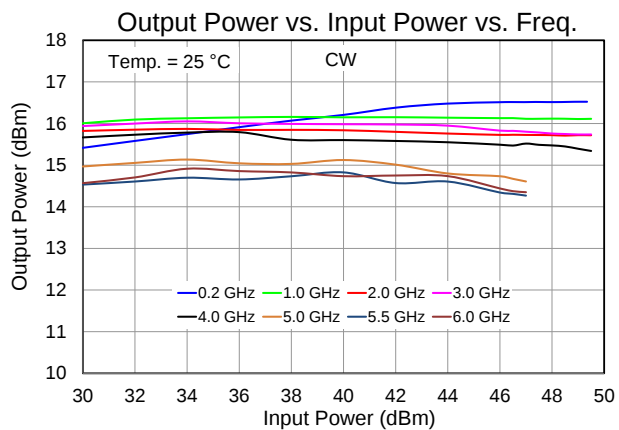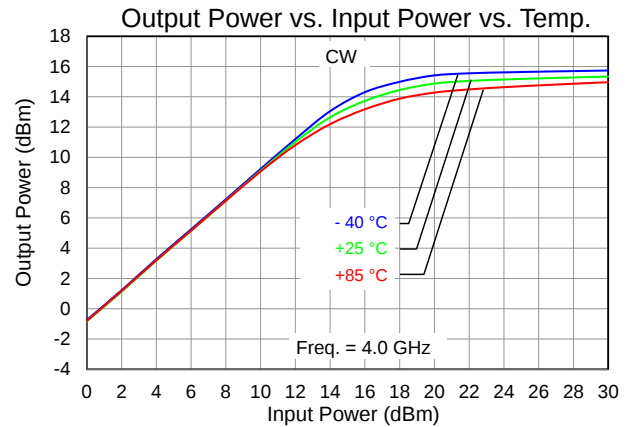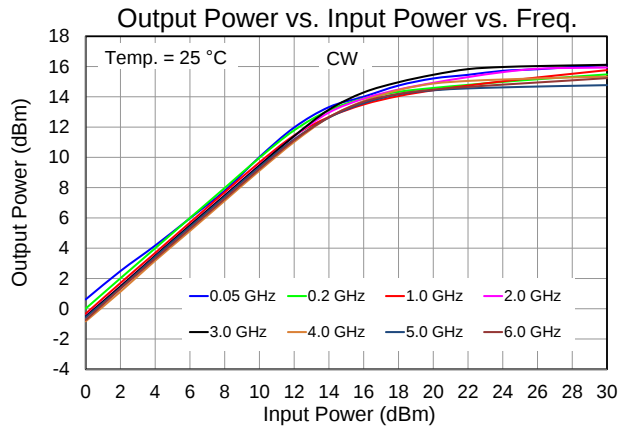




Performance Plots – Large Signal

Test conditions unless otherwise noted: Temp. = +25 °C

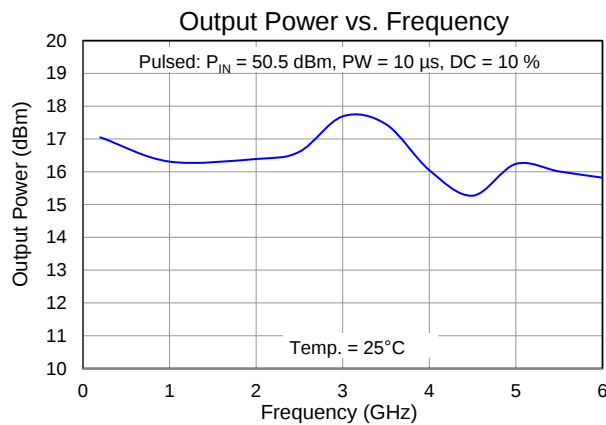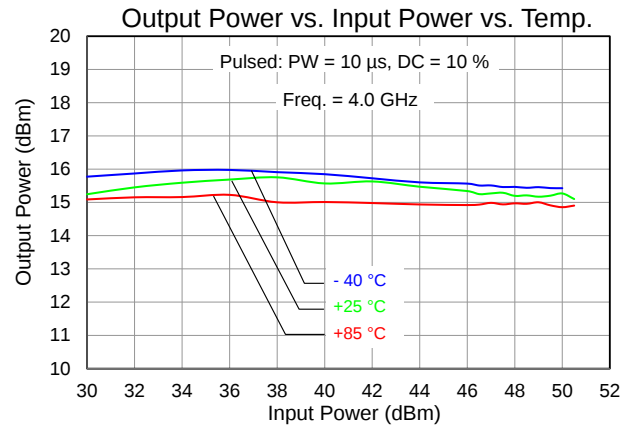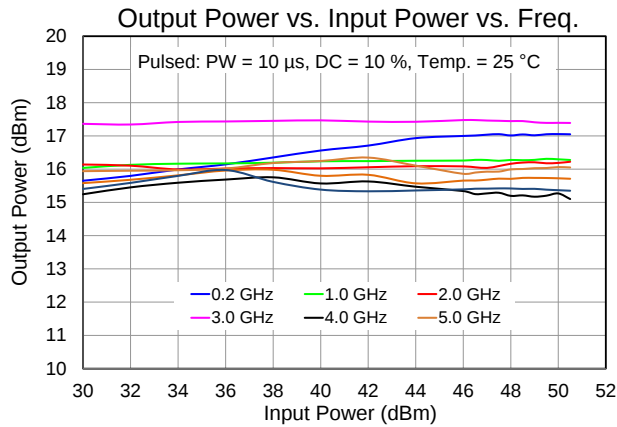

Evaluation Board PCB Information and Mounting Detail

TUNED PCB LAYOUT

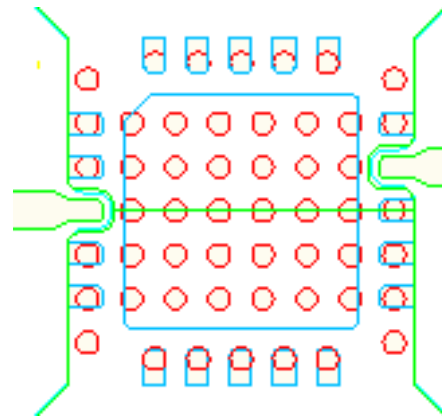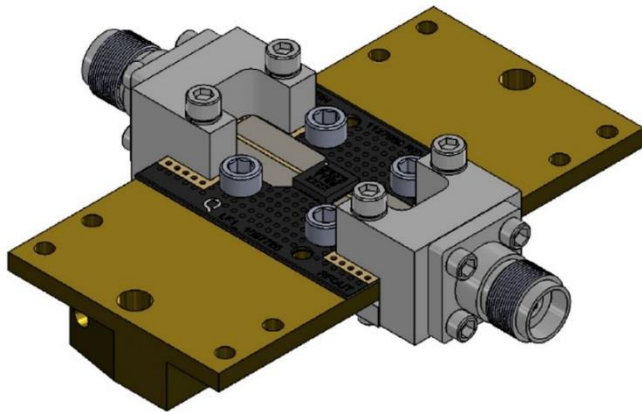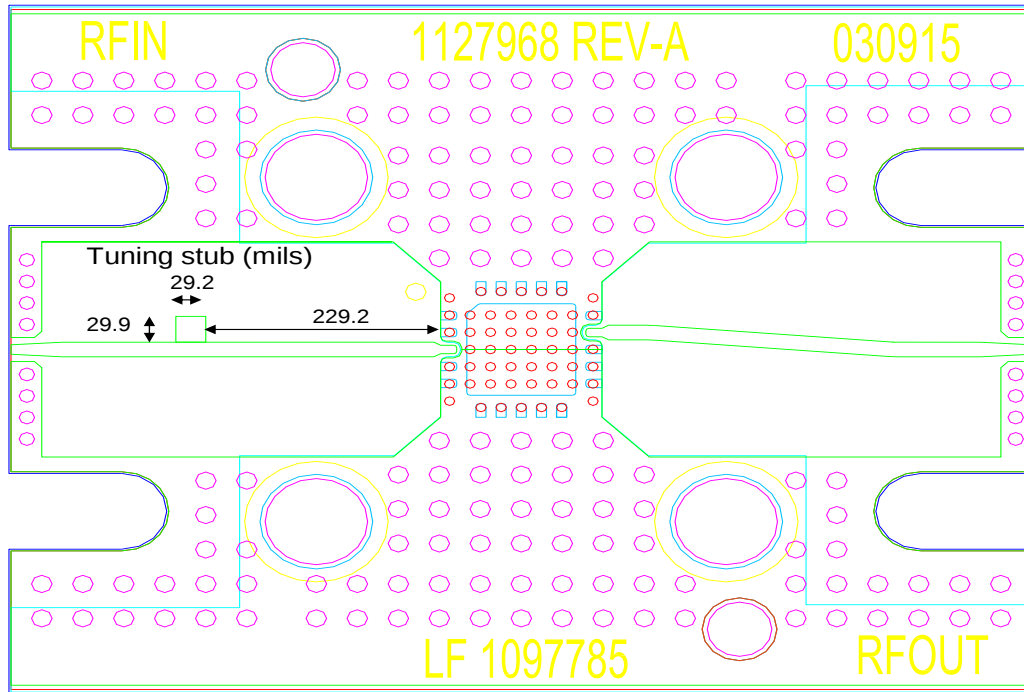


MOUNTING PATTERN

RF layer is 0.008" thick Rogers RO4003C. Metal layers are 0.5-oz copper. Microstrip 50 Ω line width is 0.050". The microstrip line taper at the connector interface is optimized for the Southwest Microwave end-launch connector 1092-02A-5.

The pad pattern shown has been developed and tested for optimized assembly at Qorvo. The PCB land pattern has been developed to accommodate lead and package tolerances. Since surface mount processes vary from company to company, careful process development is recommended.

- Ground / thermal vias under the DUT are critical for the proper performance of this device.
- The PCB shown herein utilizes copper filled vias (10 mils diameter) under the DUT to maximize heat transfer away from the DUT under large signal conditions.
- Thermal dissipation is low for normal non-limiting operation.

Package Marking, Dimensions and Pad Description

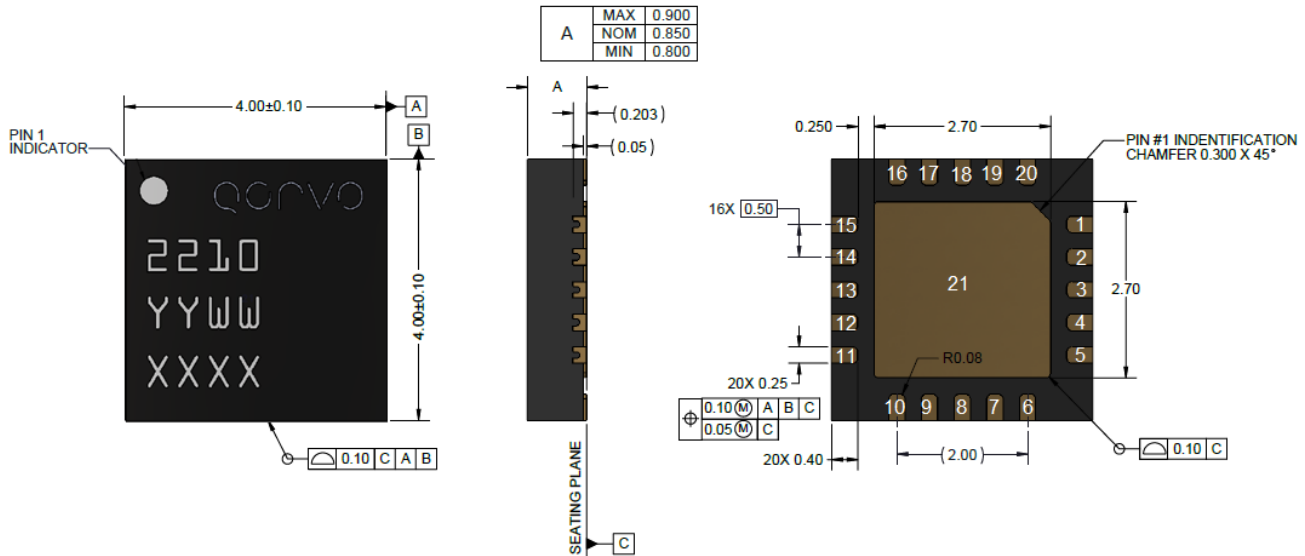

Notes:

1. All dimensions are in millimeters. Angles are in degrees.
Tolerances: XX = ± .25
XXX = ± .100
2. Package Leads Are Gold Plated (NiPdAu)
3. Part Is Mold Encapsulated
4. Part Marking:
2210: Part Number
YY: Part assembly Year
WW: Part Assembly Week
XXXX: Batch ID


Package Pad	Symbol	Description
1, 2, 4 – 13, 15 – 20	NC	No Connection; recommend GND at the EVB level
3	RF Input	Input; matched to 50 Ohms; not DC blocked
14	RF Output	Output; matched to 50 Ohms; not DC blocked
21 (Slug)	GND	On PCB; multiple vias should be employed under the center pad (21) to minimize inductance and thermal resistance; see page 9 for suggested mounting configuration

Note: The RF Input and Output ports are not interchangeable.

Solderability

Compatible with both lead-free (260°C max. reflow temp.) and tin/lead (245°C max. reflow temp.) soldering processes.
Plating is Ni-Pd-Au, Au thickness of 0.00254-0.01016 µm.

Recommended Soldering Profile

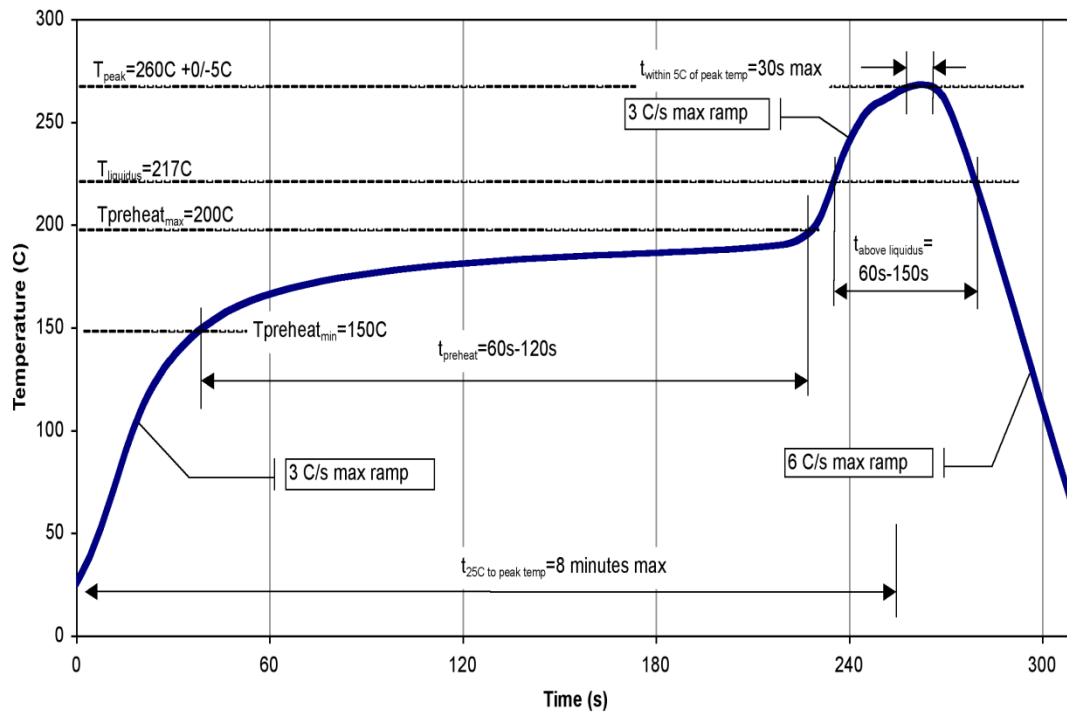

Handling Precautions

Parameter	Rating	Standard
ESD – Human Body Model (HBM)	Class 3B	ANSI/ESDA/JEDEC JS-002
ESD – Charged Device Model (CDM)	Class C3	ANSI/ESDA/JEDEC JS-001
MSL – Moisture Sensitivity Level	Level 3	IPC/JEDEC J-STD-020



Caution!
ESD-Sensitive Device

RoHS Compliance

This part is compliant with 2011/65/EU RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment) as amended by Directive 2015/863/EU.

This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A (C₁₅H₁₂Br₄O₂) Free
- PFOS Free
- SVHC Free



Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations:

Web: www.qorvo.com

Tel: 1-844-890-8163

Email: customer.support@qorvo.com

For technical questions and application information: **Email:** appsupport@qorvo.com

Important Notice

The information contained herein is believed to be reliable; however, Qorvo makes no warranties regarding the information contained herein and assumes no responsibility or liability whatsoever for the use of the information contained herein. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for Qorvo products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. **THIS INFORMATION DOES NOT CONSTITUTE A WARRANTY WITH RESPECT TO THE PRODUCTS DESCRIBED HEREIN, AND QORVO HEREBY DISCLAIMS ANY AND ALL WARRANTIES WITH RESPECT TO SUCH PRODUCTS WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.**

Without limiting the generality of the foregoing, Qorvo products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Copyright 2018 © Qorvo, Inc. | Qorvo is a registered trademark of Qorvo, Inc.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Qorvo:](#)

[TGL-2210-SM](#) [TGL2210-SMTR7](#) [TGL2210-SMEVB-01](#)