

LOC	DIST			REVISIONS			
AD	00	Р	LTR	DESCRIPTION	DATE	DWN	APVD
			D5	REVISED PER ECO-14-014057	18FEB2015	NK	RH

Materials							
No.	Component name	Base material	Finish				
1	Housing	High Temp., UL 94V-0, green					
2	End terminal	silver clad copper alloy	5 microinches min. gold				
3	Center terminal	copper alloy	5 microinches min. gold				
4	Rocker contact	silver clad copper alloy	5 microinches min. gold				
5	Actuator	Phenol resin, UL94 HB, black					
6	Plunger	stainless steel					
7	Spring	music wire					
8	Lever	brass	chrome or nickel				
9	Retainer	Polyamide, UL94 HB, black					
10	Frame	cold rolled steel	zinc or nickel				
1 1	Bushing	brass	100 microinches min. nickel over 10 microinches min. copper				
12	Mounting nuts (2)	brass	200 microinches min. bright nickel				
13	Locating ring	cold rolled steel	zinc or nickel				
14	Internal tooth lockwasher	steel	zinc or nickel				
15	Upper toggle cap	Aluminum	matte				
16	Lower toggle cap	Aluminum	matte				
17	Retaining pin	steel					

	Specifications—see note 3		1			
Current rating UL & CSA	6A @ 125 VAC (resistive)					
	3A @ 250 VAC (resistive)					
	4A @ 28 VDC (resistive)					
Termination resistance	20 milliohms max @ 2-4 VDC, 1A					
Insulation resistance	1,000 megohms min.					
Withstanding voltage	1,000 VAC					
Travel	24 + /-6 degrees					
Actuation force	.05 to 1.5 kgf					
Operating temperature	-20C to +85C					
Storage temperature	-40C to +85C					
Contact timing	break before make					
Terminal seal	epoxy or insert molded					
Durability	Parameter	2 Position	3 Position	Momentary		
	mechanical (no load)	150,000	100,000	80,000		
	250 VAC (3A resistive)	80,000	60,000	60,000		
	125 VAC (6A resistive)	80,000	60,000	60,000		
	28 VDC (4A resistive)	60,000	50,000	40,000		

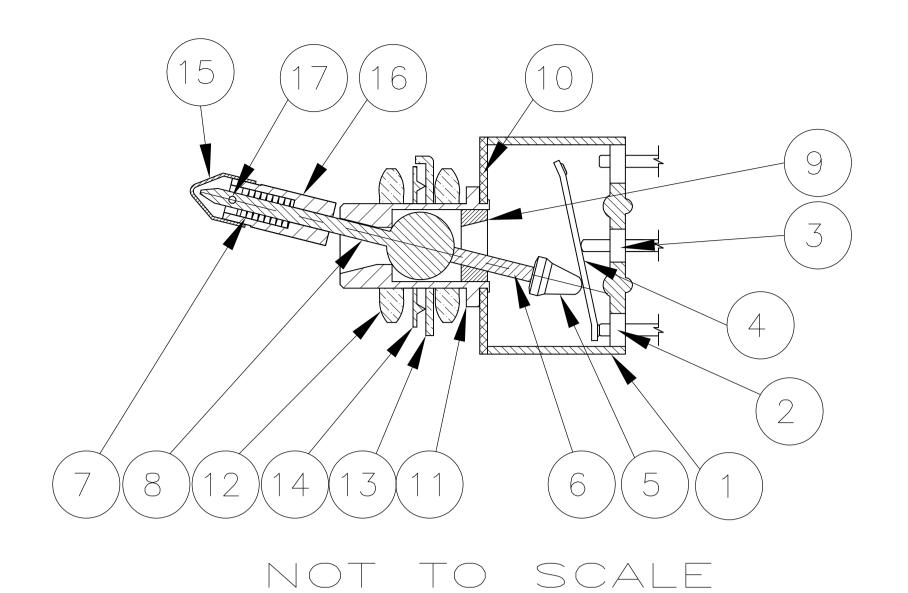

RECOMMENDED	HOLE LAYOUT
TO PREVENT ROTATION ### ### ### ### ### ### ### ### ### #	70 PREVENT ROTATION \$\int_{.256}^{\phi.250}\$

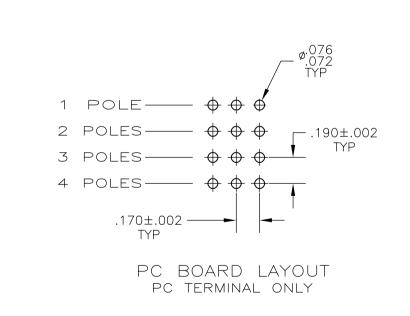



✓ 076 .072 TYP .190±.002 TYP	Part Number	Alco Model	Poles Thr	ows Function	Terminal		ALCU- 3 2 1 6 5 4 9 8 7 2 11 10	ALCU- 3 2 1 6 5 4 9 8 7 12 1 1 10	3 2 1 6 5 4 9 8 7 12 11 10	Comments
ONLY 8	4-1437559-5	MTL406PA	2 :	3 ON ON ON	Wire lug	5	-6, 11-12	5-3, 11-9	5-1, 11-7	note 7
	4-1437559-4		4 2	2 ON ON	Wire lug	2-3, 5-6,	8-9, 11-12		2-1, 5-4, 8-7, 11-10	
	4-1437559-3		3 2	2 ON OFF ON	Wire lug	2-3	, 5-6, 8-9	Off	2-1, 5-4, 8-7	
	4-1437559-2		3 2	2 ON ON	Wire lug	2-3	, 5-6, 8-9		2-1, 5-4, 8-7	
8	4-1437559-1		2 2	2 (ON) OFF (ON)	Wire lug		2-3, 5-6	Off	2-1, 5-4	
8	4-1437559-0	MTL206PA	1	3 ON ON ON	Wire lug		5-6	5-3	5-1	note 6
S	3-1437559-9		2 2	2 ON OFF ON	Wire lug		2-3, 5-6	Off	2-1, 5-4	
8	3-1437559-8	MTL206NPC	2 2	2 ON ON	PC		2-3, 5-6		2-1, 5-4	
	3-1437559-7		2 2	2 ON ON	Wire lug		2-3, 5-6		2-1, 5-4	
SUPERCEDED BY 6-1437558-9	3-1437559-6	MTL106EUL	1 2	2 ON OFF ON	Wire lug		2-3	Off	2-1	
	3-1437559-5		1 2	ON OFF ON	Wire lug		2-3	Off	2-1	
	3-1437559-4		1 2	2 ON ON	Wire lug		2-3		2-1	
							THIS DRAWING IS A CONTR	ROLLED DOCUMENT. DWN M.BINNER	29DEC03	F Connectivity

- 1 TERMINAL NUMBERS ARE FOR REFERENCE ONLY AND DO NOT APPEAR ON THE SWITCHES.
- 2 EACH SWITCH SUPPLIED WITH THE FOLLOWING MOUNTING HARDWARE:
 - (2) 1/4-40 UNS-2B HEX NUTS
 - (1) INTERNAL TOOTH LOCKWASHER
 - (1) LOCATING RING
- 5 WIRE LUG CONTACTS WILL ACCEPT 2 #20 AWG SOLID OR STRANDED WIRES.
- 6 CUSTOMER INSTALLED EXTERNAL JUMPER BETWEEN TERMINALS 2 AND 4 REQUIRED FOR 1 POLE 3 THROW FUNCTION.
- 7 CUSTOMER INSTALLED EXTERNAL JUMPERS BETWEEN TERMINALS 2 AND 4 AS WELL AS 8 AND 10 REQUIRED FOR 2 POLE 3 THROW FUNCTION.
- 8 OBSOLETE

9 LASER MARKING USED FOR PARTS.

TE Connectivity

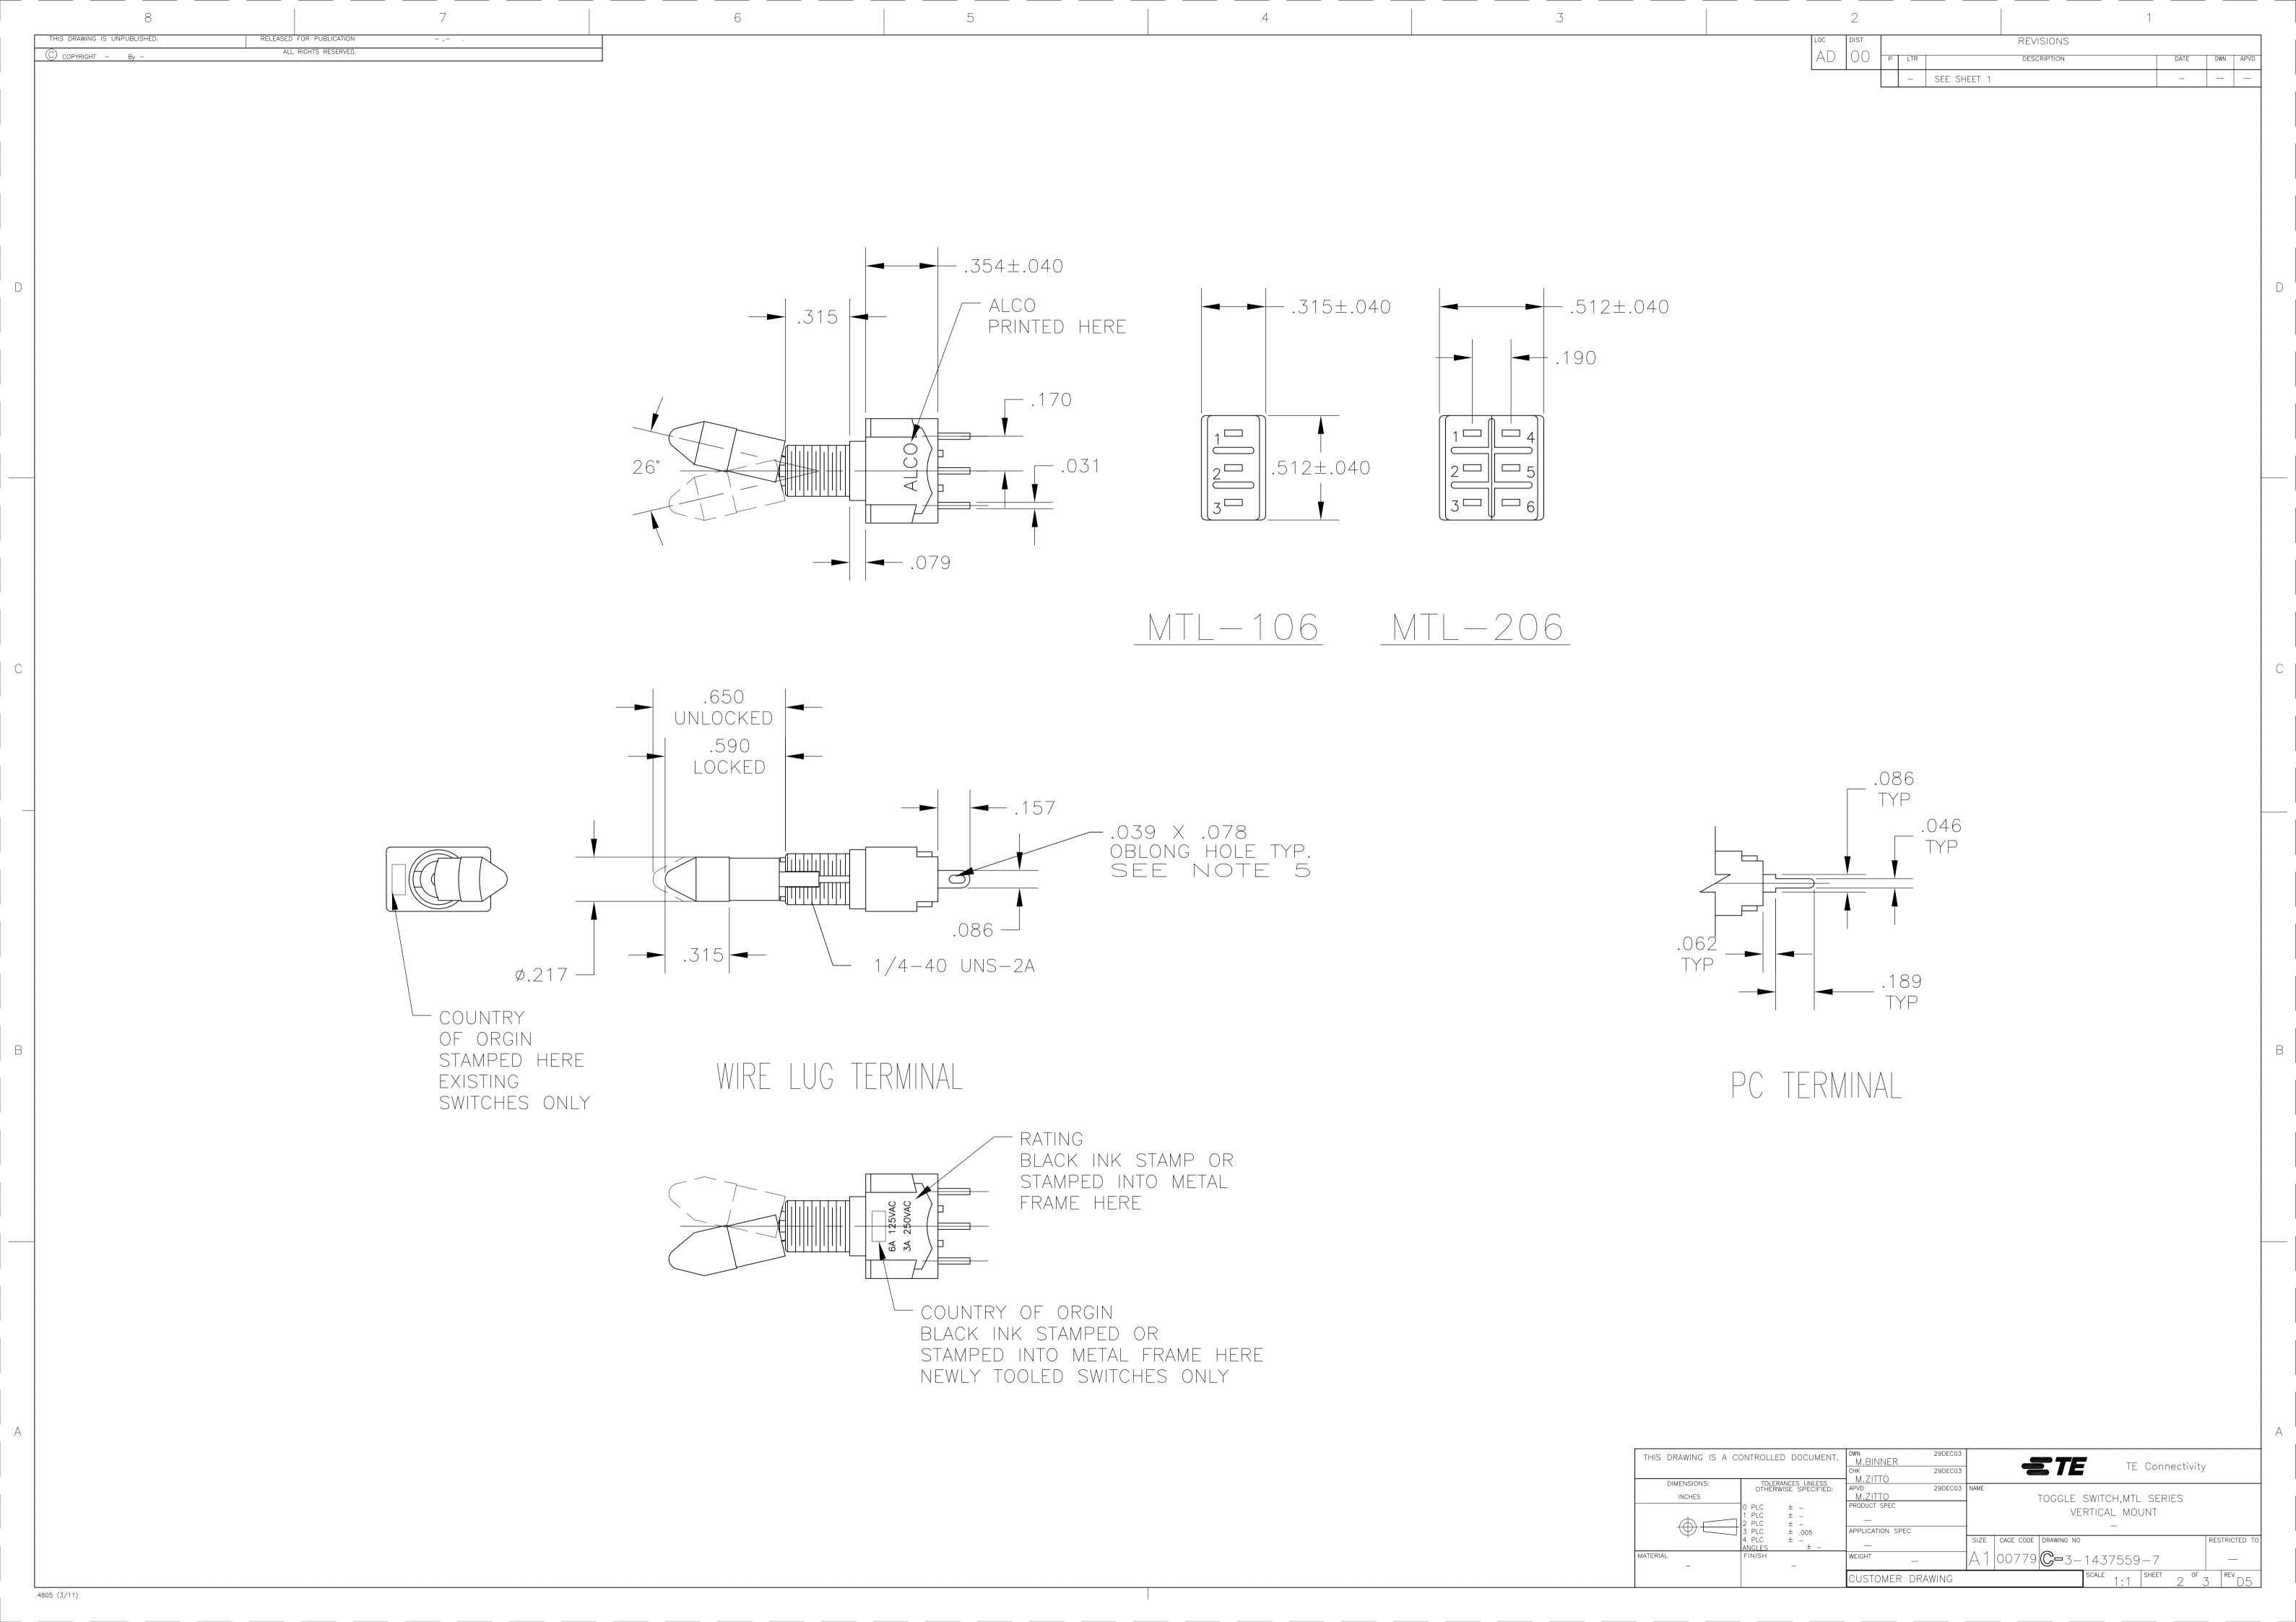

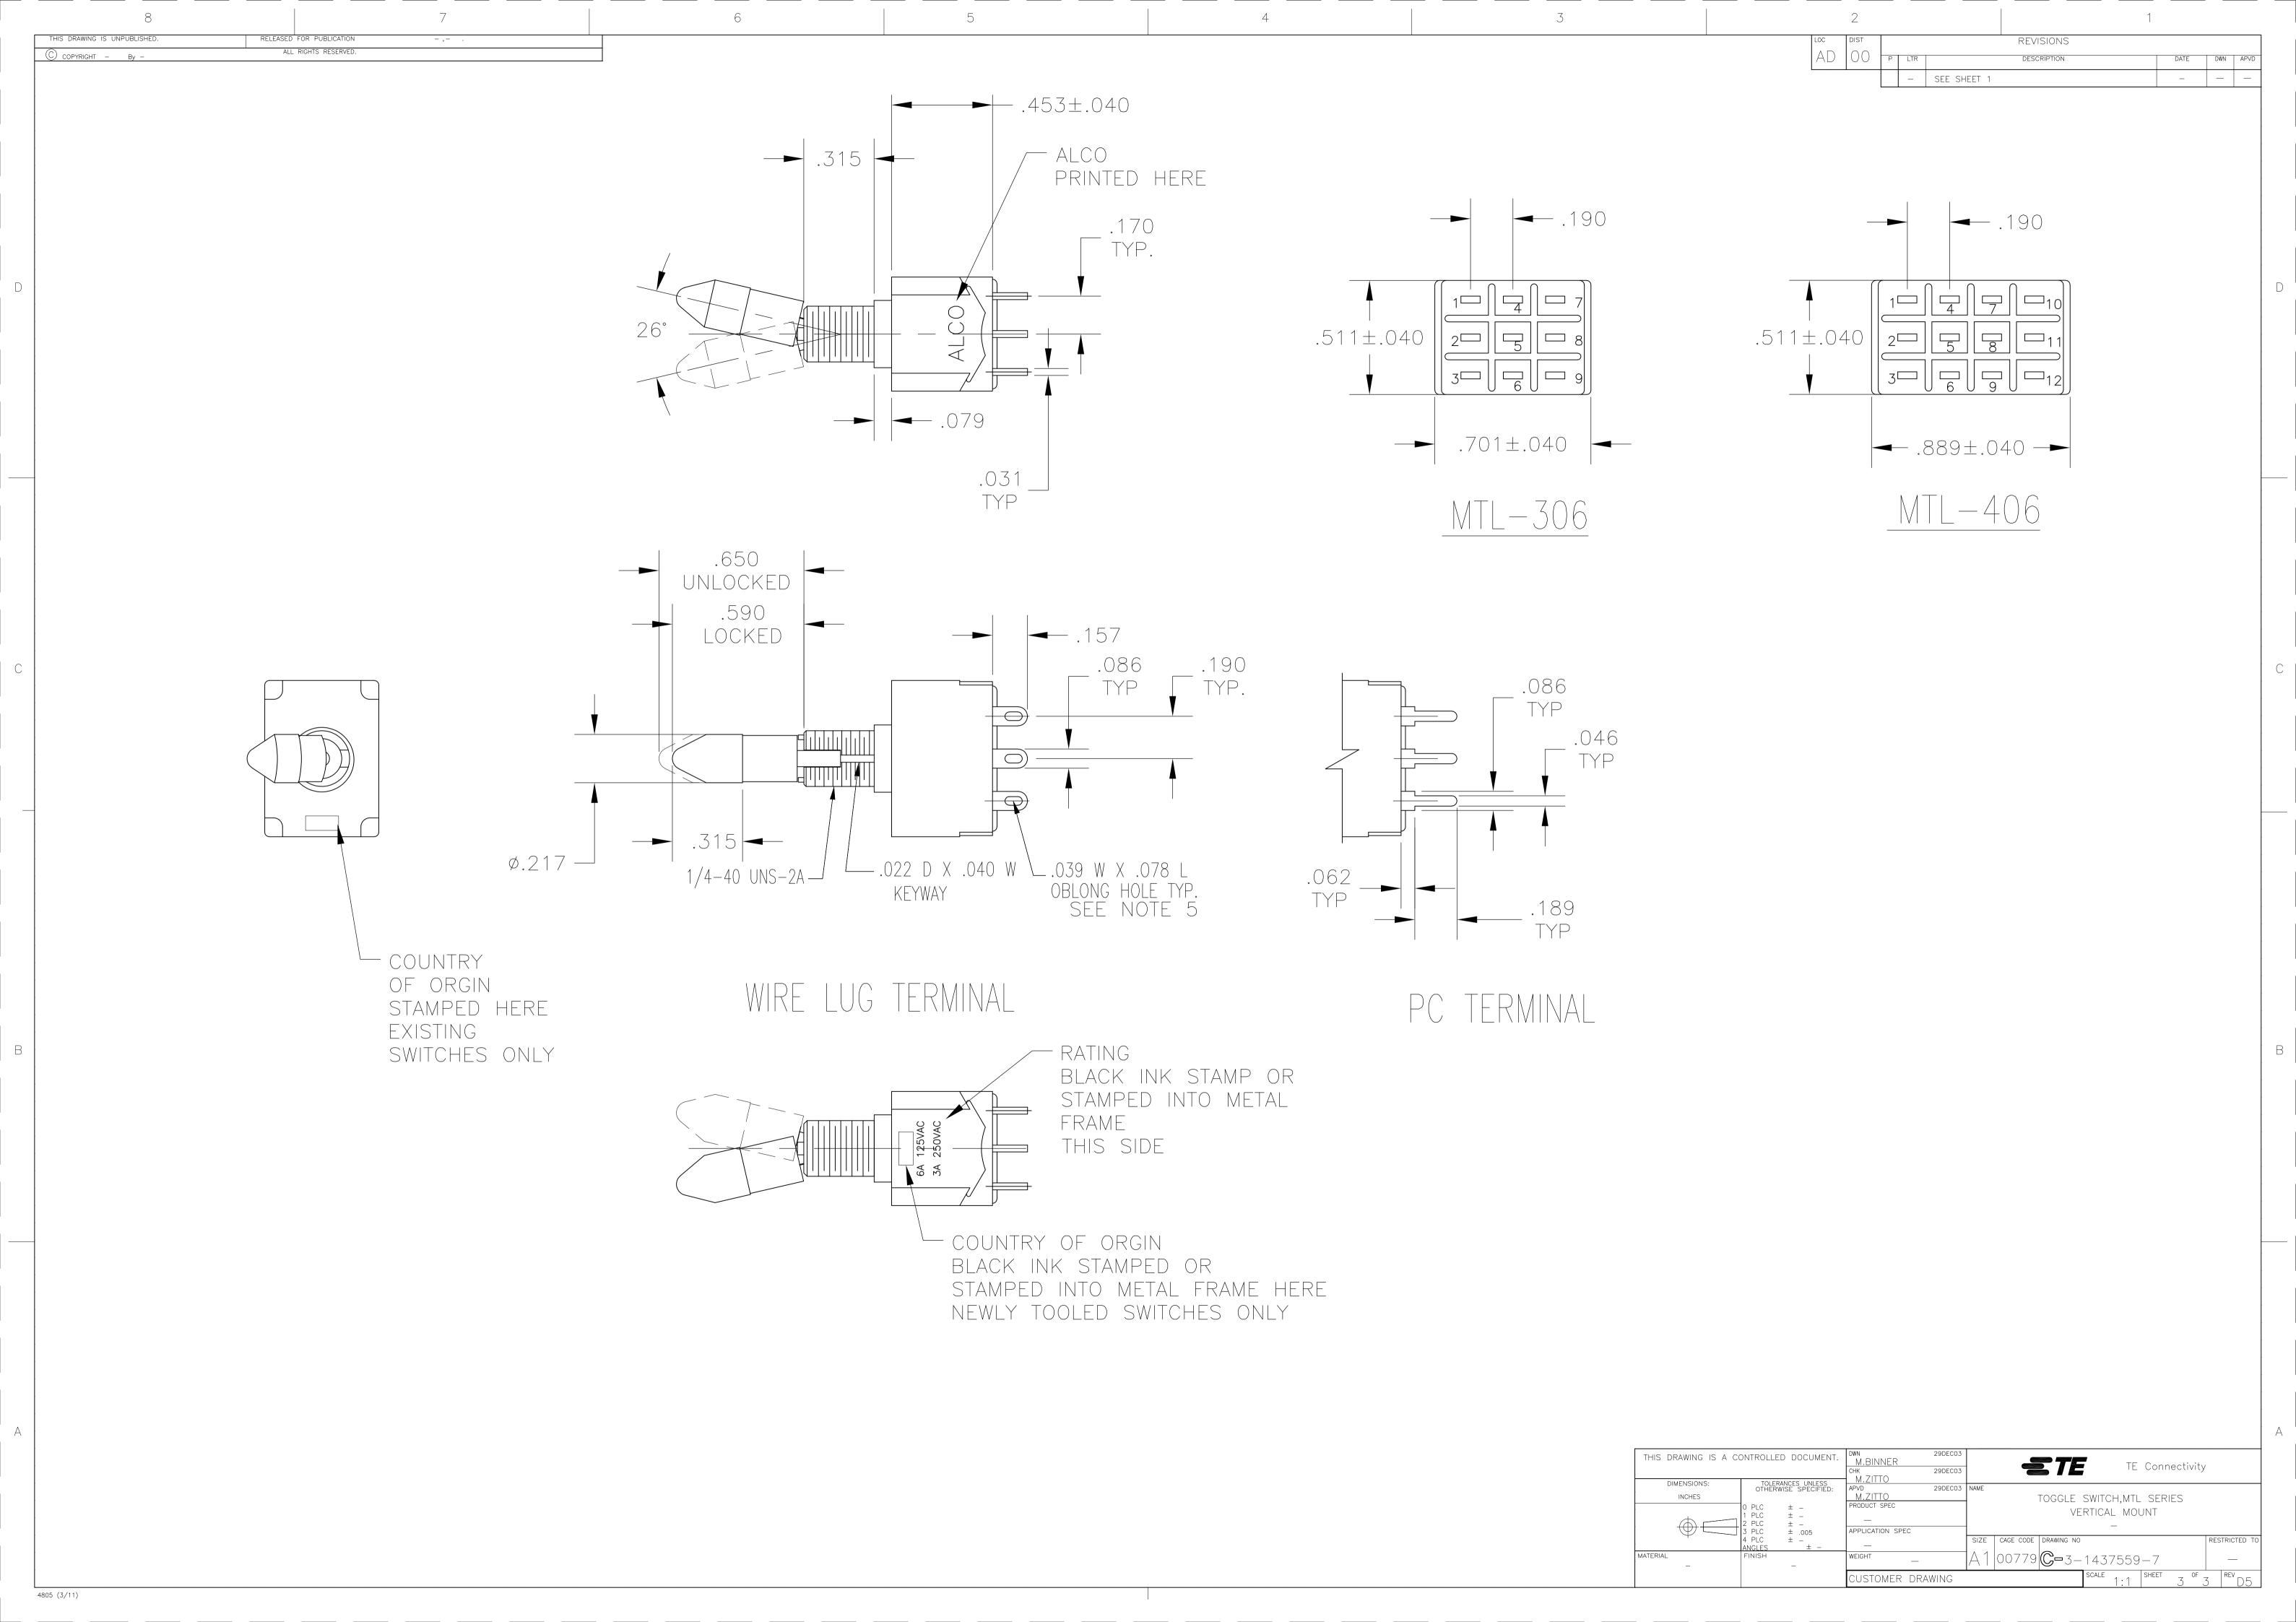

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity: